

**Authorization to Discharge Under the
National Pollutant Discharge Elimination System (NPDES)
General NPDES Permit Number NER920000
for Storm Water Discharges Associated with
Industrial Activity to Waters of the State of Nebraska**

This NPDES general permit is issued in compliance with the provisions of the Clean Water Act, as amended (33 U.S.C. Secs. 1251 *et. seq.*), the Nebraska Environmental Protection Act, as amended (Neb. Rev. Stat. Secs. 81-1501 *et. seq.*), and the Rules and Regulations promulgated pursuant to these Acts. Application may be made under this general permit for authorization to discharge storm water from industrial activity. Owners or operators issued a discharge authorization under this general permit are required to comply with the limits, requirements, prohibitions, and conditions set forth herein. The issuance of a discharge authorization under this general permit does not relieve permittees of other duties and responsibilities under the Nebraska Environmental Protection Act, as amended, or established by regulations promulgated pursuant thereto.


NPDES Permit Number: **NER920000**

This permit shall become effective on **April 1, 2022**.

This permit and the authorization to discharge shall expire at midnight, on **March 31, 2027**.

Pursuant to a Delegation Memorandum dated July 1, 2021, and signed by the Director, the undersigned hereby executes this document on behalf of the Director.

Signed this 11th day of February 2022

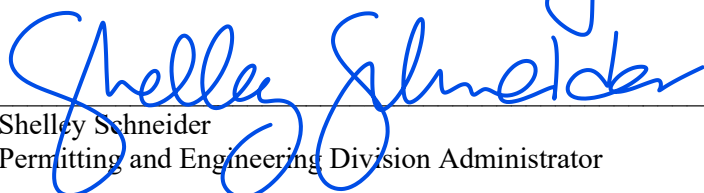

Shelley Schneider
Permitting and Engineering Division Administrator

Table of Contents

1	Coverage under this Permit	4
1.1	Eligibility Conditions	4
1.2	Permit Compliance	8
1.3	Authorization under this Permit	8
1.4	Terminating Permit Coverage	10
1.5	Conditional Exclusion for No Exposure.....	10
1.6	Alternative Permits.....	10
1.7	General Conditions.....	11
1.8	Conditions Applicable to Portable Facilities.....	11
2	Control Measures and Effluent Limits	14
2.1	Control Measures	14
2.2	Water Quality-Based Effluent Limitations.....	18
2.3	Requirements Relating to Endangered Species and Historic Properties	19
3	Corrective Actions and Additional Implementation Measures (AIM)	19
3.1	Corrective Action	19
3.2	Additional Implementation Measures (AIM).....	20
3.3	Corrective Action and AIM Documentation	25
4	Inspections	25
4.1	Routine Facility Inspections	26
4.2	Quarterly Visual Assessment of Storm water Discharges.....	27
4.3	Comprehensive Site Inspections.....	29
5	Storm Water Pollution Prevention Plan (SWPPP).....	30
5.1	Contents of Your SWPPP.....	30
5.2	Required SWPPP Modifications	34
5.3	SWPPP Availability	34
5.4	Additional Documentation Requirements	34
6	Monitoring	35
6.1	Monitoring Procedures	35
6.2	Required Monitoring	37
6.2.1	Indicator Monitoring.	38
6.2.2	Benchmark Monitoring.	40
6.2.3	Effluent Limitations Monitoring	42
6.2.4	Discharges to Impaired Waters Monitoring.	43
6.2.5	Additional Monitoring Required by NDEE.	44
7	Reporting and Recordkeeping	44
7.1	Electronic Reporting.....	44
7.2	Reporting Monitoring Data to NDEE.....	44
7.3	Additional Reporting	45
7.4	Recordkeeping.....	45
7.5	Addresses for Reports	46
8	Sector-Specific Requirements for Industrial Activity	47
8.1	Indicator Monitoring Applicable to Certain Sectors	47
8.2	Sector Specific Requirements	48
8.A	Sector A – Timber Products	49
8.B	Sector B – Paper and Allied Products	51
8.C	Sector C – Chemical and Allied Products Manufacturing, and Refining.....	52

8.D	Sector D – Asphalt Paving and Roofing Materials and Lubricant Manufacturing.....	54
8.E	Sector E – Glass, Clay, Cement, Concrete, and Gypsum Products	55
8.F	Sector F – Primary Metals.....	57
8.G	Sector G – Metal Mining.....	59
8.H	Sector H – Coal Mines and Coal Mining-Related Facilities	69
8.I	Sector I – Oil and Gas Extraction.....	74
8.J	Sector J – Non-Metallic Mineral Mining and Dressing	76
8.K	Sector K – Hazardous Waste Treatment, Storage, or Disposal Facilities	83
8.L	Sector L – Landfills, Land Application Sites, and Open Dumps	86
8.M	Sector M – Automobile Salvage Yards.....	90
8.N	Sector N – Scrap Recycling and Waste Recycling Facilities	92
8.O	Sector O – Steam Electric Generating Facilities	97
8.P	Sector P – Land Transportation and Warehousing.....	100
8.Q	Sector Q – Water Transportation.....	102
8.R	Sector R – Ship and Boat Building and Repair Yards.....	104
8.S	Sector S – Air Transportation.....	106
8.T	Sector T – Treatment Works	111
8.U	Sector U – Food and Kindred Products.....	113
8.V	Sector V – Textile Mills, Apparel, and Other Fabric Products	114
8.W	Sector W – Furniture and Fixtures	116
8.X	Sector X – Printing and Publishing	117
8.Y	Sector Y – Rubber, Miscellaneous Plastic Products, and Miscellaneous Manufacturing Industries	118
8.Z	Sector Z – Leather Tanning and Finishing.....	120
8.AA	Sector AA – Fabricated Metal Products.....	121
8.AB	Sector AB – Transportation Equipment, Industrial or Commercial Machinery Facilities....	123
8.AC	Sector AC – Electronic and Electrical Equipment and Components, Photographic and Optical Goods	124
8.AD	Sector AD – Storm Water Discharges Designated by the Director as Requiring Permits	125
9	Permit Conditions Applicable to Specific Indian Country Lands, Service Delivery Areas, or Territories.....	126
9.1	State of Nebraska Department of Environment and Energy	126
9.2	EPA Region 7.....	126
9.3	EPA Region 8.....	126

Appendices

Appendix A	Standard Conditions Applicable to all NPDES Permit
Appendix B	Definitions, Abbreviations, and Acronyms
Appendix C	List of 40 CFR Subchapter N Categories
Appendix D	Facilities and Activities Covered
Appendix E	Calculating Hardness in Receiving Waters for Hardness Dependent Metals
Appendix F	MS4s in the State of Nebraska

Attachments

Attachment 1	Threatened & Endangered Species Guidance and Checklist
Attachment 2	No Exposure Certification Guidance and Checklist
Attachment 3	Corrective Actions Report
Attachment 4	Storm Event Monitoring Report (ISW-SEMR)
Attachment 5	Relocation Notice Form

1 Coverage under this Permit

To be covered under this permit, you must meet all the eligibility conditions and follow the requirements for obtaining coverage in Part 1, and as set forth in Nebraska Department of Environment and Energy (NDEE) Title 119, *Rules and Regulations Pertaining to the Issuance of Permits under the National Pollutant Discharge Elimination System (NPDES)*, Chapter 10.

1.1 Eligibility Conditions

1.1.1 Facilities Covered. To be eligible to discharge under this permit, you must have a storm water discharge associated with industrial activity from your primary industrial activity (as defined in Appendix B and as listed in Appendix D), or be notified by the Department that you are eligible for coverage under Sector AD as set forth in Part 8.AD of this permit.

This permit authorizes the discharge of storm water from both stationary and portable facilities. Additional notification and discharge authorization procedures apply to portable facilities as set forth in Part 1.8 of this permit.

This permit authorizes discharges of storm water to waters of the state, a municipal separate storm sewer system (MS4), or a combined sewer system within the State of Nebraska. Discharges are subject to the terms and conditions of this permit other than those listed in Part 1.1.4 of this permit. Eligibility excludes tribal lands within the State of Nebraska. Facilities located within tribal lands within the State of Nebraska are under the permitting authority of the EPA Regions 7 and 8; refer to Part 9 of this permit.

1.1.2 Allowable Storm Water Discharges. The following discharges are eligible for coverage under this permit:

1.1.2.1 Storm water discharges associated with industrial activity for any primary industrial activities and co-located industrial activities, as defined in Appendix B, except for any storm water discharge prohibited in Part 8;

1.1.2.2 Discharges designated by the Department as needing a storm water permit as provided in Sector AD;

1.1.2.3 Discharges that are not otherwise required to obtain NPDES permit authorization but are mixed with discharges that are authorized under this permit; and

1.1.2.4 Storm water discharges from facilities subject to any of the national storm water-specific effluent limitations guidelines listed in Table 1-1.

Regulated Discharge	40 CFR Section	Industry Sector	New Source Performance Standard (NSPS)	New Source Date
Discharges resulting from spray down or intentional wetting of logs at wet deck storage areas	Part 429, Subpart I	A	Yes	1/26/81
Runoff from phosphate fertilizer manufacturing facilities that comes into contact with any raw materials, finished product, by-products or waste products (SIC 2874)	Part 418, Subpart A	C	Yes	4/8/74
Runoff from asphalt emulsion facilities	Part 443, Subpart A	D	Yes	7/28/75

Table continued on next page.

Regulated Discharge	40 CFR Section	Industry Sector	New Source Performance Standard (NSPS)	New Source Date
Runoff from material storage piles at cement manufacturing facilities	Part 411, Subpart C	E	Yes	2/20/74
Mine dewatering discharges at crushed stone, construction sand and gravel, or industrial sand mining facilities	Part 436, Subparts B, C, and D	J	No	N/A
Runoff from hazardous waste and non-hazardous waste landfills	Part 445, Subparts A and B	K, L	Yes	2/2/00
Runoff from coal storage piles at steam electric generating facilities	Part 423	O	Yes	11/19/82 (10/8/74) ¹
Runoff containing urea from airfield pavement deicing at existing and new primary airports with 1,000 or more annual non-propeller aircraft departures	Part 449	S	Yes	6/15/10

¹ NSPS promulgated in 1974 were not removed via the 1982 regulation; therefore, wastewaters generated by Part 423-applicable sources that were New Sources under the 1974 regulations are subject to the 1974 NSPS.

1.1.3 Allowable Non-Storm Water Discharges. Below is the list of non-storm water discharges authorized under this permit. Unless specifically listed in this Part, this permit does not authorize any other non-storm water discharges requiring NPDES permit coverage. You must eliminate those discharges, or they must be covered under another NPDES permit. See Part 2.1.2.10 and sector specific non-storm water prohibited discharges in Part 8. See also additional allowable non-storm water discharges for Sectors A, G, H, and J facilities in Part 8.

- Discharges from emergency or unplanned fire-fighting activities;
- Fire hydrant and fire suppression system flushing (if the discharge does not contain chemical additives or surfactants);
- Potable water, including uncontaminated water line flushing, but excluding chlorination of water lines for disinfection unless dechlorinated;
- Uncontaminated condensate from air conditioners, coolers/chillers, and other compressors, and from the outside storage of refrigerated gases or liquids;
- Irrigation drainage from adjacent agricultural lands;
- Landscape watering provided all pesticides, herbicides, and fertilizer have been applied in accordance with the approved labeling;
- Routine external building wash down that does not use detergents, solvents and degreasers;
- Uncontaminated ground water or spring water;
- Foundation or footing drains where flows are not contaminated with process materials;
- Incidental windblown mist from cooling towers that collects on rooftops or adjacent portions of your facility, but not intentional discharges from the cooling tower (e.g., “piped” cooling tower blowdown or drains);
- See Part 8 for sector specific allowable discharges;
- Any authorized non-storm water discharge listed above in this Part 1.1.3 or any storm water discharge listed in Part 1.1.2 mixed with a discharge authorized by different NPDES permit and/or a discharge that does not require NPDES permit coverage.

1.1.4 Limitations on Coverage. Below is the list of discharges not eligible for coverage under this permit.

1.1.4.1 Discharges Mixed with Non-Storm Water. Storm water discharges that are mixed with non-storm water, other than the non-storm water discharges listed in Part 1.1.3, and/or those mixed with a discharge authorized by a different NPDES permit, and/or a discharge that does not require NPDES authorization.

1.1.4.2 Storm Water Discharges Associated with Construction Activity. Storm water discharges associated with construction activity disturbing one acre or more, or that are part of a larger common plan of development or sale if the larger common plan will ultimately disturb one acre or more, unless in conjunction with portable facilities (see Part 1.8), mining activities or certain oil and gas extraction activities as specified in Sectors G, H, I, and J of this permit.

1.1.4.3 Discharges Already Covered by Another Permit. Unless you received written notification from the Department specifically allowing these discharges to be covered under this permit, you are not eligible for coverage under this permit for any of the following:

- Storm water discharges associated with industrial activity that are currently covered under an individual NPDES permit or an alternative NPDES general permit;
- Discharges covered within five years prior to the effective date of this permit by an individual permit or alternative general permit where that permit established site-specific numeric water quality-based limitations developed for the storm water component of the discharge; or
- Discharges from facilities where any NPDES permit has been or is in the process of being denied, terminated, or revoked by the Department (this does not apply to the routine reissuance of permits every five years).

1.1.4.4 Storm Water Discharges Subject to Effluent Limitations Guidelines. Storm water discharges subject to effluent limitation guidelines under NDEE Title 119, Chapter 27 (see 40 CFR, Subchapter N), other than those storm water discharges identified in Table 1-1, are not eligible for coverage under this permit. For these discharges, a site-specific NPDES permit incorporating the applicable effluent limitations guidelines must be issued by the Department. Compliance with this general permit is required for the remainder of the facilities discharges.

1.1.4.5 Endangered and Threatened Species and Critical Habitat Protection. Coverage under this permit is available only if your storm water discharges, allowable non-storm water discharges, and storm water discharge-related activities will not adversely affect any species that are state or federally-listed as endangered or threatened (“listed”) and will not result in the adverse modification or destruction of habitat that is state or federally-designated as “critical habitat” by the Nebraska Game and Parks Commission (<http://outdoornebraska.gov>).

New or Expanded Dischargers. You must meet one of the criteria below:

- Criterion A No state or federally-listed threatened or endangered species or their designated critical habitat are likely to occur in the “action area” as defined in Appendix B;
or
- Criterion B Consultation between the Nebraska Game and Parks Commission has been concluded and determined that either the discharge is not likely to have an effect, or through the use of control measures, the discharge is not likely to have an effect.

The Threatened and Endangered Species Guidance and Checklist, Attachment 1, may be used to determine if the facility will qualify for Criterion A, or must seek to qualify under Criterion B. The checklist must also be completed electronically via the NDEE website as part of the electronic Notice of Intent (NOI). If the facility meets Criterion B, your electronic NOI will

automatically be forwarded to the Nebraska Game and Parks Commission for review before the Department makes a determination.

This permit does not replace any other requirements related to threatened and endangered species. This permit does not authorize discharges which will adversely affect an endangered or threatened species, or their critical habitats.

1.1.4.6 Historic Properties Preservation. This permit does not replace or satisfy any review requirements for historic places or archeological sites, from new or expanded discharges that have the potential to negatively impact properties listed or eligible for listing in the National Register of Historic Places, or affecting known or discovered archeological sites. This Permit does not relieve or excuse the owner from compliance with the National Historic Preservation Act and all required review and coordination activities related to historic preservation, including significant anthropological sites and any burial sites, with the Nebraska Historic Preservation Officer. The permittee must comply with all applicable state and local laws concerning the protection of historic properties and places. The permittee's discharge authorization under this permit is contingent upon compliance.

1.1.4.7 New Discharges to Water Quality Impaired Waters. If you are a new discharger, you are not eligible for coverage under this permit to discharge to an "impaired water", as defined in Appendix B unless you do one of the following:

- a. Prevent all exposure to storm water of the pollutant(s) for which the waterbody is impaired, and retain documentation of procedures taken to prevent exposure onsite with your Storm Water Pollution Prevention Plan (SWPPP);
- b. Prior to submitting your NOI, provide documentation that the pollutant(s) for which the waterbody is impaired is not present at your site, and retain documentation of this finding with your SWPPP; or
- c. Prior to submitting your NOI, provide to the Department data to support a conclusion that the discharge is expected to meet applicable water quality standards, and retain such data with your SWPPP. The information you submit must demonstrate:
 - i. For discharges to waters without an EPA-approved or established total maximum daily load (TMDL), that the discharge of the pollutant for which the water is impaired will meet water quality standards at the point of discharge to the waterbody; or
 - ii. For discharges to waters with an applicable EPA-approved or established TMDL, that there are sufficient remaining wasteload allocations in the TMDL to allow your discharge and that existing dischargers to the waterbody are subject to compliance schedules designed to bring the waterbody into attainment with water quality standards.

You are eligible under Part 1.1.4.7.c if you receive an affirmative determination from the Department that your discharge will meet applicable water quality standards, and you retain the determination with your SWPPP. If the Department fails to respond within 30 days after submission of data, you are eligible for coverage.

1.1.4.8 New or Expanded Discharges to Waters Designated as State Resource Water – Class A or Class B for Antidegradation Purposes. If you are a new or expanded discharger, you are not eligible for coverage under this permit for discharges to waters designated as State Resource Water – Class A for antidegradation purposes identified in NDEE Title 117, *Nebraska Surface Water Quality Standards*, Chapter 5. If you are a new or expanded discharger, you must receive written authorization from the Department specifically authorizing discharges to any State Resource Water – Class B.

1.1.4.9 New or Expanded Discharges to Public Drinking Water Supplies. If you are a new or expanded discharger, you must receive written authorization from the Department specifically

authorizing discharges to any waters protected as a public drinking water supply identified in NDEE Title 117, Chapter 5.

1.2 Permit Compliance

Any noncompliance with any of the requirements of this permit constitutes a violation of this permit, and thus is a violation of the Clean Water Act. As detailed in Part 3, failure to take any required corrective actions constitutes an independent violation of this permit, in addition to any original violation that triggered the need for a corrective action. As such, any actions and time periods specified for remedying noncompliance do not absolve parties of the initial underlying noncompliance.

Where a corrective action is triggered by an event that does not itself constitute permit noncompliance, such as an exceedance of an applicable benchmark, there is no permit violation provided you comply with the required responses within the relevant deadlines established in Part 3.1.3.

1.3 Authorization under this Permit

1.3.1 How to Obtain Authorization. To obtain authorization under this permit, you must:

- Be located in the State of Nebraska where NDEE is the permitting authority;
- Meet the Part 1.1 eligibility requirements;
- Develop a SWPPP or update your existing SWPPP per Part 5 prior to submitting your Notice of Intent (NOI);
- Select, design, install, and implement control measures in accordance with Part 2.1 to meet non-numeric effluent limits;
- Submit a complete and accurate NOI, see Part 1.3.2, electronically via the NDEE website according to the requirements in Part 7.1; and
- Additional submission requirements may apply to facilities discharging through a Small Municipal Separate Storm Sewer System (MS4), see Part 7.5.2.

1.3.2 NOI Requirements. You must provide the following information when submitting your NOI electronically via the NDEE website:

- The facility operator name, address, phone number, email, and IRS Employer Identification Number or Citizen Attestation Form (available on the NDEE website);
- The facility name as registered with the Nebraska Secretary of State, address, county, and latitude/longitude;
- The Standard Industrial Classification (SIC) Code of facility;
- Provide information regarding if the facility is portable and subject to relocation (see Part 1.8), if the facility is inactive and unstaffed (see Part 4.1.3), and if the facility discharges to a regulated MS4 (see Appendix F);
- Determine the potential for exposure or certification of No Exposure (see Part 1.5, and Attachment 2);
- Complete the threatened and endangered species checklist, include a Nebraska Game and Parks Commission review if required (see Part 1.1.4.5);
- Determine if the facility discharges to State Resource Waters Class A or Class B (see Part 1.1.4.8);
- The site map and SWPPP, including the SWPPP contact person or authorized representative (see Part 5);
- List of pollutants, federal effluent limitation guidelines (see Table 1-1 and Part 8), and process discharges;
- Contact information of the NOI preparer if different than the certifying official; and
- A statement, signed and certified in accordance with Appendix A, section 12.

1.3.3 Deadlines for Submitting Your NOI and Your Official Date of Permit Coverage. Table 1-2 provides the deadlines for submitting your NOI and your official start date of permit coverage.

Table 1-2. NOI Submittal Deadlines/Discharge Authorization Dates		
Category	NOI Submission Deadline	Discharge Authorization Date¹
<u>Existing Dischargers</u> – in operation and previously authorized for coverage under the ISW-GP NER910000 (issued July 18, 2016).	No later than (September 28, 2022, 180 days following effective date)	30 calendar days after NDEE receives a complete and accurate NOI. Note: You must review and update your SWPPP to ensure that this permit’s requirements are addressed prior to submitting your NOI. Provided you submit your NOI in accordance with the deadline, your authorization under ISW-GP NER910000 is automatically continued until you have been granted coverage under this permit or an alternative permit, or coverage is otherwise terminated.
<u>New Dischargers or New Sources</u> - commencing discharging after issuance of this General Permit.	A minimum of 30 days prior to commencing operation of the facility.	30 days after NDEE receives a complete and accurate NOI or upon notification of authorization from the NDEE.
<u>New Dischargers or New Sources</u> - in operation prior to issuance of this General Permit but not covered under the previous ISW-GP NER910000 or another NPDES permit.	Immediately, to minimize the time discharges from the facility will continue to be unauthorized.	60 days after NDEE receives a complete and accurate NOI or upon notification of authorization from the NDEE.

¹ Based on a review of your NOI or other information, NDEE may delay your authorization for further review, notify you that additional effluent limitations are necessary, or may deny coverage under this permit and require submission of an application for an individual NPDES permit, as detailed in Part 1.6. In these instances, NDEE will notify you in writing of the delay, of the need for additional effluent limits, or of the request for submission of an individual NPDES permit application.

1.3.4 Modifying your NOI. If after submitting your electronic NOI, you need to correct or update any fields, contact the Department for instructions.

1.3.4.1 For an existing operator with discharge authorization. If any of the information supplied on the NOI changes, you must submit in writing to the Department within thirty (30) calendar days after the change occurs.

1.3.4.2 Transfers not authorized. (See Appendix A, section 14.c) At a facility where there is a transfer in operator or a new operator takes over operational control at an existing facility, the new operator must submit a new NOI no later than thirty (30) calendar days after a change in operators. The previous operator must submit a Notice of Termination (NOT) no later than thirty (30) calendar days after the ISW general permit coverage becomes active for the new operator, as specified in Part 1.4.

1.3.5 Official End Date of Permit Coverage. Once covered under this permit, your coverage will last until the date that:

- You terminate permit coverage by submitting a Notice of Termination (NOT) per Part 1.4; or
- You receive coverage under a different NPDES permit or a reissued or replacement version of this permit after it expires; or
- You fail to submit an NOI for coverage under a reissued or replacement version of this permit before the required deadline.

1.3.6 Continuation of this Permit. If this permit is not reissued or replaced prior to the expiration date, it will be administratively continued in accordance with NDEE Title 119, Chapter 24 and remain in force and effect. If you were authorized to discharge under this permit prior to the expiration date, any discharges authorized under this permit will automatically remain covered by this permit until the earliest of:

- Your authorization for coverage under a reissued permit or a replacement of this permit following your timely and appropriate submittal of a complete NOI requesting authorization to discharge under the new permit and compliance with the requirements of the new permit; or
- Your submittal of a Notice of Termination; or
- Issuance or denial of an individual permit for the facility's discharges; or
- A formal permit decision by the Department not to reissue this general permit, at which time the Department will identify a reasonable time frame for covered dischargers to seek coverage under an alternative general permit or an individual permit. Coverage under this permit will cease at the end of this time frame.

1.3.7 Denial of Coverage for New or Previously Unpermitted Facilities. For new or previously unpermitted facilities, following the submittal of your NOI, you may be denied coverage under this permit and must apply for and/or obtain authorization to discharge under an alternative permit.

1.4 Terminating Permit Coverage

1.4.1 Submitting a Notice of Termination. To terminate permit coverage, you must submit a complete and accurate Notice of Termination (NOT) electronically via the NDEE website. Your authorization to discharge under this permit terminates 14 days after a complete NOT is processed. If you submit a NOT without meeting one or more of the conditions identified in Part 1.4.2, then your NOT is not valid. You are responsible for meeting the terms of this permit until your authorization is terminated.

1.4.2 When to Submit a NOT. You must submit a NOT within 30 days after one or more of the following conditions have been met:

- A new owner or operator has taken over responsibility for the facility; or
- You have ceased operations at the facility, there are not or no longer will be discharges of storm water associated with industrial activity from the facility, and you have already implemented necessary sediment and erosion controls as required by Part 2.1.2.5;
- You are a Sector G, H, or J facility and you have met the applicable termination requirements; or
- You have obtained coverage under an individual or alternative general permit for all discharges required to be covered by an NPDES permit, unless the Department has required that you obtain such coverage under authority of Part 1.6.1, in which case coverage under this permit will terminate automatically.

1.5 Conditional Exclusion for No Exposure

If you are covered by this permit and become eligible for a "no exposure" conditional exclusion from permitting under NDEE Title 119, Chapter 10, Part 007.04D, you may file a No Exposure Certification (NEC). You are no longer required to have a permit upon submission of a complete and accurate NEC to the Department. If you are no longer required to have permit coverage because of a "no exposure" conditional exclusion and have submitted a NEC to the Department, you are not required to submit a NOT. You must submit a complete and accurate NEC electronically via the NDEE website, see Attachment 2 for guidance. You must submit a NEC to the Department once every five years, or upon reissuance or replacement of this permit, and maintain a condition of No Exposure.

1.6 Alternative Permits

1.6.1 Coverage Under Alternative Permits. The Department may require you to apply for and/or obtain authorization to discharge under either an individual NPDES permit or an alternative NPDES

general permit. Any person or operator may petition the Department to require an alternative NPDES permit.

If the Department requires you to apply for an alternative NPDES permit, you will be notified in writing that a permit application or NOI is required. This notification will include a brief statement of the reasons for this decision and will provide application or NOI requirements and deadlines. In addition, if you are an existing discharger authorized to discharge under this permit, the notice will include a statement that on the effective date of the alternative NPDES permit, coverage under this general permit will terminate. The Department may grant additional time to submit the application if requested. If you are covered under this permit and fail to submit an alternative NPDES permit application as required by the Department, your authorization to discharge under this permit is terminated at the end of the day specified as the deadline for application submittal. The Department may take appropriate enforcement action for any unpermitted discharge.

1.6.2 Requesting Coverage Under an Alternative Permit. You may request to be excluded from coverage under this general permit by applying for an individual permit or alternative NPDES general permit in accordance with the requirements of NDEE Title 119. You must include with your permit application or NOI, reasons supporting the request. The request may be granted by issuance of an individual permit or authorization of coverage under an alternative NPDES general permit if your reasons are adequate to support the request. If the Department determines that the reasons are not adequate, you may be asked for further information or your request may be denied.

If you are covered under this permit, when an alternative NPDES permit is issued, your authorization to discharge under this permit is terminated on the effective date of the alternative permit.

1.7 General Conditions

1.7.1 Narrative Limits. Discharges authorized under this permit:

- Shall not be toxic to aquatic life in surface waters of the state outside the mixing zones allowed in NDEE Title 117, *Nebraska Surface Water Quality Standards*;
- Shall not contain pollutants at concentrations or levels that produce objectionable films, colors, turbidity, deposits, or noxious odors in the receiving stream or waterway; and
- Shall not contain pollutants at concentrations or levels that cause the occurrence of undesirable or nuisance aquatic life in the receiving stream.

1.7.2 Penalties. Nothing in this permit shall preclude the initiation of any legal action or relieve you from any responsibilities, liabilities, or penalties under Section 311 of the Clean Water Act. Violations of the terms and conditions of this permit may result in the initiation of criminal and/or civil actions in accordance with Nebraska Rev. Stat. §81-1508, as amended to date. Violations may also result in federal prosecution.

1.8 Conditions Applicable to Portable Facilities

Portable facilities (also referred to as temporary sources) may require additional NDEE Air Quality construction or operating permits. These sources can be relocated as the need may arise, such as a portable asphalt or concrete plant that tends to move locations in order to be closer to road construction sites. See Sector D – Asphalt Paving and Roofing Materials and Lubricant Manufacturing and Sector E – Glass, Clay, Cement, Concrete, and Gypsum Products for additional information.

1.8.1 Notification Requirements for Relocation of Portable Facilities. The permittee shall provide the Department with notification of the relocation of any facility at least 20 days in advance of each relocation, or as soon as practicable. Notification shall be provided using the "Relocation Notice Form" (See Attachment 5). The Department may request additional information as necessary to evaluate a relocation request.

If required or upon request, when a facility is relocated to an area where storm water will be discharged through a Municipal Separate Storm Sewer System (MS4), the permittee shall concurrently provide written notification of the relocation to the operator of MS4 through which they will discharge.

1.8.2 Site-specific Discharge Authorizations, Denials and Revocations for Portable Facilities.

1.8.2.1 Authorizations to discharge to State Resource Waters or Public Drinking Water Supplies. Portable sources shall obtain written authorization from the Department on a site-specific basis prior to discharging industrial storm water to any of the State Resource Waters or public drinking water supplies identified by NDEE Title 117, Chapter 5. When submitting notice of relocation to a location which will discharge to a State Resource Water and/or a public drinking water supply, the submission shall identify the water to which the facility will discharge and an explanation of why site-specific authorization is needed (e.g. relocation site discharges to Stone Creek, State Resource Water – Class B). Discharges to other waters of the state do not require written discharge authorization, but site-specific denials or revocations of discharge authorizations can be made by the Department.

1.8.2.2 Denial of Authorization. The Department may deny or revoke authorization to discharge for portable facilities at specific locations due to potential impacts on water quality, State Resource Waters, listed endangered or threatened species, habitat critical to an endangered or threatened species, or human health or safety. The Department shall provide the permittee with a written notice of the denial or revocation, and an explanation of the reason for the denial. The Department may require additional time to review the relocation notice or any supplemental information.

1.8.3 Operational Changes Relative to Facility Portability. The permittee shall notify the Department in writing if a facility is “converted” from a stationary to a portable facility, or vice-versa.

1.8.4 Technology-Based Effluent Limits Applicable to All Earth-Disturbing Activities Conducted Prior to Active Operation. Earth-disturbing activities (i.e., clearing, grading, excavation, and construction) conducted prior to active operation are covered under this permit.

1.8.4.1 Management Practices for Earth-Disturbing Activities.

1.8.4.1.1 Selecting and Installing Control Measures. For all areas affected by clearing, grading, and excavation activities, you must select, design, install, and implement control measures that meet applicable Part 2 effluent limits and 40 CFR Part 450.21.

1.8.4.1.2 Good Housekeeping. Litter, debris, and chemicals must be prevented from becoming a pollutant source in storm water discharges.

1.8.4.1.3 Retention and Detention of Storm Water Runoff. For drainage locations serving more than one acre, sediment basins and/or temporary sediment traps should be used. At a minimum, silt fences, vegetative buffer strips, or equivalent sediment controls are required for all down slope boundaries (and for side slope boundaries as necessary based on individual site conditions) of the development area unless a sediment basin providing storage for a calculated volume of runoff from a 2-year, 24-hour storm or 3,600 cubic feet of storage per acre drained is provided. You are required to remove sediment from sediment traps or sedimentation ponds when design capacity has been reduced by 50 percent.

1.8.4.2 Inspection of Earth-Disturbing Activities.

1.8.4.2.1 Inspection Frequency. Inspections must be conducted at least once every 14 calendar days and within 24 hours of the end of a storm event of 0.5 inches or greater. In the case of shortened scheduling, your first earth-disturbing activity site inspection may be combined with the first routine inspection (Part 1.8.5.2). Inspection frequency may be reduced to at least once every month if the entire site is temporarily stabilized (pursuant

to Part 1.8.4.3.2), if runoff is unlikely due to winter conditions (e.g., site is covered with snow, ice, or the ground is frozen), or construction is occurring during seasonal dry periods in semi-arid areas. Reduced inspection frequency does not relieve the permittee of the maintenance responsibilities during interim periods.

1.8.4.2.2 Location of Inspections. Inspections must include all areas of the site disturbed by clearing, grading, and/or excavation activities and areas used for storage of materials that are exposed to precipitation. Sedimentation and erosion control measures must be observed to ensure proper operation. Discharge locations must be inspected to ascertain whether erosion control measures are effective in preventing significant impacts to waters of the state, where accessible. Where discharge locations are inaccessible, nearby downstream locations must be inspected to the extent that such inspections are practicable. Locations where vehicles enter or exit the site must be inspected for evidence of significant off-site sediment tracking.

1.8.4.2.3 Inspection Reports. For each inspection required above, you must complete an inspection report. At a minimum, the inspection report must include the information required in Part 4.1.

1.8.4.3 Requirements for Cessation of Earth-Disturbing Activities.

1.8.4.3.1 Inspections and Maintenance. Inspections and maintenance of control measures, including BMPs, associated with clearing, grading, and excavation activities must continue until final stabilization has been achieved on all portions of the disturbed area, or until the commencement of operation.

1.8.4.3.2 Temporary Stabilization of Disturbed Areas. Stabilization measures should be initiated immediately in portions of the site where clearing, grading and/or excavation activities have temporarily ceased, but in no case more than 14 days after the clearing, grading and/or excavation activities in that portion of the site have temporarily ceased. In semi-arid, and drought-stricken areas, or where initiating perennial vegetative stabilization measures is not possible within 14 days construction activity has temporarily ceased due to winter conditions (e.g., site is covered with snow, ice, or the ground is frozen), temporary vegetative stabilization measures must be initiated as soon as practicable. Until temporary vegetative stabilization is achieved, interim measures such as erosion control blankets with an appropriate seed base and tackifiers must be employed. In areas of the site, where construction has permanently ceased prior to active operations, temporary stabilization measures must be implemented to minimize mobilization of sediment or other pollutants until such time as operating commences.

1.8.4.3.3 Final Stabilization of Disturbed Areas. Stabilization measures should be initiated immediately in portions of the site where construction activities have permanently ceased, but in no case more than 14 days after the construction activity in that portion of the site has permanently ceased. In semi-arid, and drought-stricken areas, or where initiating perennial vegetative stabilization measures is not possible within 14 days after construction activity has permanently ceased due to winter conditions (e.g., site is covered with snow, ice, or the ground is frozen), final vegetative stabilization measures must be initiated as soon as possible. Until final stabilization is achieved temporary stabilization measures, such as erosion control blankets with an appropriate seed base and tackifiers, must be used.

1.8.5 Exceptions for Portable Facilities.

1.8.5.1 Outfall Specific Requirements. Portable facilities do not need to develop outfall specific procedures and information. However, they are required to identify the potential pollutants that could be released from the facility.

1.8.5.2 Inspections. At portable sources, the permittee shall conduct inspections within the first seven days after relocation and at least one additional time within the first 90 days of operation to ensure that all controls are properly installed and functioning. In the case of shortened scheduling, your first earth-disturbing activity site inspection (Part 1.8.4.2.1) may be combined with the first routine inspection.

After the first 90 days of operation, Routine Facility Inspections (Part 4.1) shall resume quarterly, or more frequently if required by sector specific requirements. Upon termination of activities at a temporary site, the entire site must undergo a Final Inspection for the presence of spilled materials, industrial materials, and industrial wastes. All occurrences must be properly addressed and removed.

1.8.5.3 Visual Assessment. Portable facilities must follow the procedures established in Part 4.2 for quarterly visual assessment of storm water discharges for those quarters which the facility will be operating under this permit (when operating in the State of Nebraska).

1.8.5.4 Comprehensive Site Inspections. Facilities operating under this permit for less than three months per calendar year are waived from the requirement to perform annual comprehensive site inspections. Facilities operating under this permit for more than three months per calendar year must conduct comprehensive site inspections annually. It is recommended that these comprehensive inspections be conducted as the second inspection within the first 90 days after relocation (see 1.8.5.2) at one of the locations for which the facility will operate during the calendar year.

1.8.6 Monitoring. Portable facilities are required to monitor according to Part 6, except in the case of fourth year monitoring for polycyclic aromatic hydrocarbons (PAHs) and fourth year benchmark monitoring, see Part 6.2. For PAHs and benchmark monitoring, the portable facility will only need to sample during the four quarters after each relocation, or only while occupying one location if less than four quarters. See sector specific requirements in Part 8. The facility must also follow the corrective actions and addition implementation measures as described in Part 3.

1.8.7 Site Closure Requirements.

1.8.7.1 Agricultural land. Portable facilities utilizing agricultural land must return the site to its preexisting agricultural use, unless the landowner agrees in writing to be solely responsible for compliance with this permit and site closure requirements. After completing the Final Inspection outlined in 1.8.5.2, the site must: remove all industrial materials and wastes including petroleum affected soils, remediate compaction, replace topsoil. Unless the landowner has taken responsibility, the portable facility must also seed an agricultural crop or temporary cover crop.

1.8.7.1 Non-Agricultural land. Portable facilities utilizing non-agricultural land must remove all industrial materials and wastes including petroleum affected soils and complete the Final Inspections outlined in 1.8.5.2.

2 Control Measures and Effluent Limits

In the technology-based limits included in Part 2.1 and in Part 8, the term “minimize” means reduce and/or eliminate to the extent achievable using storm water control measures (including best management practices) that are technologically available, and economically practicable and achievable in light of best industry practice. The term “infeasible” means not technologically possible or not economically practicable and achievable in light of best industry practices.

2.1 Control Measures

You must select, design, install, and implement control measures (including best management practices) to minimize pollutant discharges that address the selection and design considerations in Part 2.1.1, meet the non-numeric effluent limits in Part 2.1.2, meet limits contained in applicable effluent limitation guidelines in Part 2.1.3, and meet the water quality-based effluent limitations in Part 2.2.

The selection, design, installation, and implementation of these control measures must be in accordance with good engineering practices and manufacturer's specifications. Note that you may deviate from such manufacturer's specifications where you provide justification for such deviation and include documentation of your rationale in the part of your SWPPP that describes your control measures, consistent with Part 5.1.4. If you find that your control measures are not achieving their intended effect of minimizing pollutant discharges to meet water quality standards or any of the other non-numeric effluent limits in this permit, you must modify these control measures as expeditiously as practicable per Part 3. Regulated storm water discharges from your facility include storm water run-on that commingles with storm water discharges associated with industrial activity at your facility.

2.1.1 Control Measure Selection and Design Considerations. You must consider the following when selecting and designing control measures:

- Preventing storm water from coming into contact with polluting materials is generally more effective, and less costly, than trying to remove pollutants from storm water;
- Using control measures in combination may be more effective than using control measures in isolation for minimizing pollutants in your storm water discharge;
- Assessing the type and quantity of pollutants, including their potential to impact receiving water quality, is critical to designing effective control measures that will achieve the limits in this permit;
- Minimizing ground water contamination, infiltration is not appropriate for discharges likely to contain pollutants which are mobile within the soil;
- Underground Injection Control authorization may be required for certain types of practices which infiltrate (i.e., Class V Injection Well);
- Attenuating flow using open vegetated swales and natural depressions can reduce in-stream impacts of erosive flows;
- Conserving and/or restoring of riparian buffers will help protect streams from storm water runoff and improve water quality; and
- Using treatment interceptors (e.g., swirl separators and sand filters) may be appropriate in some instances to minimize the discharge of pollutants.

2.1.2 Non-Numeric Technology-Based Effluent Limits. These limits are based on the Best Practicable Control Technology Currently Available (BPT), Best Available Technology Economically Achievable (BAT), and Best Conventional Pollutant Control Technology (BCT) as defined in the Clean Water Act Section 304(b). You must comply with the following non-numeric effluent limitations as well as any sector-specific non-numeric effluent limits in Part 8, except where otherwise specified.

2.1.2.1 Minimize Exposure. You must minimize the exposure of manufacturing, processing, and material storage areas (including loading and unloading, storage, disposal, cleaning, maintenance, and fueling operations) to rain, snow, snowmelt, and runoff in order to minimize pollutant discharges by either locating these industrial materials and activities inside or protecting them with storm resistant coverings (although significant enlargement of impervious surface area is not recommended). Unless infeasible, you must also:

- Use grading, berming, or curbing to prevent runoff of contaminated flows and divert run-on away from these areas;
- Locate materials, equipment, and activities so that potential leaks and spills are contained or able to be contained or diverted before discharge;
- Clean up spills and leaks promptly using dry methods (e.g., absorbents) to prevent the discharge of pollutants;
- Store leaky or leak-prone vehicles and equipment indoors where feasible, if stored outdoors, use drip pans and absorbents;
- Use spill/overflow protection equipment;

- Drain fluids from equipment and vehicles prior to on-site storage or disposal, and for any equipment or vehicles that will remain unused for extended periods of time, inspect at least monthly for leaks; and
- Perform all equipment and/or vehicle cleaning operations indoors, under cover, or in bermed areas that prevent runoff and run-on and that capture any overspray. Ensure that all wash water drains to a proper collection system (i.e., not the storm water drainage system).

The discharge of vehicle and equipment wash water, including tank cleaning operations, is not authorized by this permit. These wastewaters must be covered under a separate NPDES permit, discharged to a sanitary sewer in accordance with applicable industrial pretreatment requirements, or disposed of otherwise in accordance with applicable law.

Note: Industrial materials do not need to be enclosed or covered if storm water from affected areas does not discharge pollutants to receiving waters or if discharges are authorized under another NPDES permit.

2.1.2.2 Good Housekeeping. You must keep clean all exposed areas that are potential sources of pollutants. The good housekeeping measures to minimize pollutant discharges, include but are not limited to the following:

- Sweep or vacuum at regular intervals or, alternatively, wash down the area and collect and/or treat, and properly dispose of the wash water;
- Store materials in appropriate containers;
- Keep all dumpster lids closed when not in use. For dumpsters and roll-off containers that do not have lids and could leak, ensure that discharges have a control (e.g., secondary containment, treatment). Consistent with Part 1.1.3, this permit does not authorize dry weather discharges from dumpsters or roll-off containers; and
- Minimize the potential for waste, garbage, and floatable debris to be discharged by keeping exposed areas free of such materials, or by intercepting them before they are discharged.

2.1.2.3 Maintenance. You must regularly inspect, test, maintain, and repair all industrial equipment and systems to avoid situations that may result in leaks, spills, and other releases of pollutants in storm water discharged to receiving waters. You must maintain all control measures that are used to achieve the effluent limits required by this permit in effective operating condition. Nonstructural control measures must also be diligently maintained (e.g., spill response supplies available, personnel appropriately trained). If you find that your control measures need to be replaced or repaired, you must make the necessary repairs or modifications as expeditiously as practicable.

2.1.2.4 Spill Prevention and Response. You must minimize the potential for leaks, spills and other releases that may be exposed to storm water and develop plans for effective responses to such spills if or when they occur in order to minimize pollutant discharges. You must conduct spill prevention and response measures, including but not limited to, the following:

- Plainly label containers (e.g., “Used Oil,” “Spent Solvents,” “Fertilizers and Pesticides,” etc.) that could be susceptible to spillage or leakage to encourage proper handling and facilitate rapid response if spills or leaks occur;
- Implement procedures for material storage and handling, such as barriers between material storage and traffic areas, and secondary containment provisions;
- Implement procedures for expeditiously stopping, containing, and cleaning up leaks, spills, and other releases. Employees who may cause, detect, or respond to a spill or leak must be trained in these procedures and have necessary spill response equipment available. If possible, one of these individuals should be a member of your storm water pollution prevention team (see Part 5.1.1); and

- Notify appropriate facility personnel, emergency response agencies, and regulatory agencies when a leak, spill, or other release occurs. Where a leak, spill, or other release containing a hazardous substance or oil in an amount equal to or in excess of a reportable quantity established under NDEE Title 126, *Rules and Regulations Pertaining to the Management of Waste*, occurs during a 24-hour period, you must notify the National Response Center (NRC) at (800) 424-8802 in accordance with the requirements of 40 CFR Part 110, 40 CFR Part 117, and 40 CFR Part 302 as soon as you have knowledge of the discharge. You must also notify The Department of Environment and Energy at (402) 471-2186 during normal business hours (Monday through Friday 8am-5pm) or the Nebraska State Patrol at (402) 471-4545 outside of normal business hours (after business hours, holidays, weekends) in accordance with the requirements of NDEE Title 126 as soon as you have knowledge of the discharge. Local requirements may necessitate reporting spills or discharges to local emergency response, public health, or drinking water supply agencies. Contact information must be in locations that are readily accessible and available.

2.1.2.5 Erosion and Sediment Controls. To minimize pollutant discharges in storm water, you must minimize erosion by stabilizing exposed soils at your facility and placing flow velocity dissipation devices at discharge locations to minimize channel and streambank erosion in the immediate vicinity of discharge points. You must also use structural and/or non-structural control measures to minimize the discharge of sediment. There are many resources to help you select appropriate storm water control measures, including:

- EPA's sector-specific *Industrial Stormwater Fact Sheet Series*, www.epa.gov/npdes/stormwater-discharges-industrial-activities-fact-sheets-and-guidance;
- The *National Menu of Best Management Practices for Stormwater* website at: www.epa.gov/npdes/national-menu-best-management-practices-bmps-stormwater;
- EPA's *Stormwater Discharges from Construction Activities* website at: www.epa.gov/npdes/stormwater-discharges-construction-activities;
- The *Urban Runoff: National Management Measures* website at: www.epa.gov/nps/urban-runoff-national-management-measures; and
- Any similar state or local publications.

2.1.2.6 Management of Storm Water. You must divert, reuse, contain, or otherwise reduce storm water runoff to minimize pollutants in your discharges. In selecting, designing, installing, and implementing appropriate control measures, you are encouraged to consult with EPA's resources relating to runoff management, as listed in Part 2.1.2.5 above.

2.1.2.7 Salt Storage Piles or Piles Containing Salt. In order to minimize pollutant discharges you must enclose or cover storage piles of salt, or piles containing salt, used for deicing or other commercial or industrial purposes, including maintenance of paved surfaces. You must implement appropriate measures (e.g., good housekeeping, diversions, containment) to minimize exposure resulting from adding to or removing materials from the pile. Piles do not need to be enclosed or covered pursuant to this permit if storm water runoff from the piles is not discharged or if discharges from the piles are authorized under another NPDES permit.

2.1.2.8 Sector Specific Non-Numeric Effluent Limits. You must achieve any additional non-numeric limits stipulated in the relevant sector-specific section(s) of Part 8.

2.1.2.9 Employee Training. You must train all employees who work in areas where industrial materials or activities are exposed to storm water, or who are responsible for implementing activities necessary to meet the conditions of this permit (e.g., inspectors, maintenance personnel), including all members of your storm water pollution prevention team, see Part 5.1.1. Training must cover both the specific control measures used to achieve the effluent limits in this Part, and monitoring, inspection, planning, reporting, and documentation requirements in other

parts of this permit. NDEE recommends training be conducted at least annually (or more often if employee turnover is high).

2.1.2.10 Non-Storm Water Discharges. You must eliminate non-storm water discharges not authorized by an NPDES permit. See Part 1.1.3 for a list of non-storm water discharges authorized by this permit and sector specific non-storm water discharges authorized in Part 8.

2.1.2.11 Dust Generation and Vehicle Tracking of Industrial Materials. You must minimize generation of dust and off-site tracking of raw, final, or waste materials in order to minimize pollutant discharges.

2.1.3 Numeric Effluent Limitations Based on Effluent Limitations Guidelines. If you are in an industrial category subject to one of the effluent limitations guidelines identified in Table 1-1 (see Part 1.1.2.4), you must meet the effluent limits referenced in Table 2-1 below:

Table 2-1. Applicable Effluent Limitations Guidelines		
Regulated Activity	40 CFR Section/Subpart	Effluent Limit
Discharges resulting from spray down or intentional wetting of logs at wet deck storage areas	Part 429, Subpart I	See Part 8.A.7
Runoff from phosphate fertilizer manufacturing facilities that comes into contact with any raw materials, finished product, by-products or waste products (SIC 2874)	Part 418, Subpart A	See Part 8.C.4
Runoff from asphalt emulsion facilities	Part 443, Subpart A	See Part 8.D.4
Runoff from material storage piles at cement manufacturing facilities	Part 411, Subpart C	See Part 8.E.5
Mine dewatering discharges at crushed stone, construction sand and gravel, or industrial sand mining facilities	Part 436, Subparts B, C, and D	See Part 8.J.9
Runoff from hazardous waste landfills	Part 445, Subpart A	See Part 8.K.6
Runoff from non-hazardous waste landfills	Part 445, Subpart B	See Part 8.L.10
Runoff from coal storage piles at steam electric generating facilities	Part 423	See Part 8.O.7
Runoff containing urea from airfield pavement deicing at existing and new primary airports with 1,000 or more annual non-propeller aircraft departures	Part 449	See Part 8.S.7

2.2 Water Quality-Based Effluent Limitations

2.2.1 Water Quality Standards. Your discharge must be controlled as necessary to meet applicable water quality standards.

The Department expects that compliance with the conditions in this permit will control discharges as necessary to meet applicable water quality standards. If at any time you become aware, or the Department determines, that your discharge does not meet applicable water quality standards, you must take corrective action as required in Part 3.1.1, document the corrective actions as required in Parts 3.3 and 5.4, and report the corrective actions to the Department as required in Part 3.3.

Additionally, the Department may impose additional water quality-based limitations on a site-specific basis or require you to obtain coverage under an individual permit, if information in your NOI, required reports, or from other sources indicates that your discharges are not controlled as necessary to meet applicable water quality standards.

2.2.2 Discharges to Water Quality Impaired Waters.

2.2.2.1 Existing Discharge to an Impaired Water with an EPA-Approved or Established TMDL. If you discharge to an impaired water with an EPA-approved or established TMDL, the Department will inform you if any additional measures are necessary for your discharge to be consistent with the assumptions and requirements of the applicable TMDL and its wasteload allocation, or if coverage under an individual permit is necessary in accordance with Part 1.6.1.

2.2.2.2 Existing Discharge to an Impaired Water without an EPA-Approved or Established TMDL. If you discharge to an impaired water without an EPA-approved or established TMDL, you are required to comply with Part 2.2.1 and the monitoring requirement of Part 6.2.2. Note that this provision also applies to situations where the Department determines that your discharge is not controlled as necessary to meet water quality standards in a downstream water segment, even if your discharge is to a receiving water that is not specifically identified on a Section 303(d) list.

2.2.2.3 New Discharge to an Impaired Water. If your authorization to discharge under this permit relied on Part 1.1.4.7 for a new discharge to an impaired water, you must implement and maintain any control measures or conditions on your site that enabled you to become eligible under Part 1.1.4.7, and modify such measures or conditions as necessary pursuant to any Part 3 corrective actions. You are also required to comply with Part 2.2.1 and the monitoring requirements of Parts 6.2.2.

2.2.3 State Resource Water –Class B Antidegradation Requirements for New or Increased Dischargers. If you are a new discharger, or an existing discharger required to notify the Department of an increased discharge consistent with Part 7.2 (i.e., a “planned changes” report), and you discharge directly to waters designated by the Department as State Resource Water – Class B (identified by NDEE Title 117, Chapter 5) for antidegradation purposes, the Department may notify you that additional analyses, control measures, or other permit conditions are necessary to comply with the applicable antidegradation requirements, or notify you that an individual permit application is necessary in accordance with Part 1.6.1. If you are a new or expanded discharger, you must receive written authorization from the Department specifically authorizing discharges to any State Resource Water – Class B.

2.3 Requirements Relating to Endangered Species and Historic Properties

If your eligibility under either Part 1.1.4.5 or Part 1.1.4.6 was made possible through your, or another operator’s, agreement to include certain measures or prerequisite actions, or implement certain terms and conditions, you must comply with all such agreed-upon requirements to maintain eligibility under this general permit.

3 Corrective Actions and Additional Implementation Measures (AIM)

3.1 Corrective Action

3.1.1 Conditions Requiring Review and Revision to Ensure Effluent Limits are Met. If any of the following conditions occur, you must review and revise, as appropriate, the selection, design, installation, and implementation of your control measures to ensure that this permit’s effluent limits are met, pollutant discharges are minimized, and the condition and its recurrence is eliminated. You must also review and modify your SWPPP as needed, per Part 5.2, to address the following conditions:

- An unauthorized release or discharge (e.g., spill, leak, or discharge of non-storm water not authorized by this or another NPDES permit) occurs at your facility;
- A discharge violates a numeric effluent limit listed in Table 2-1 and /or in your Part 8 sector-specific requirements;
- You become aware, or NDEE determines, that your control measures are not stringent enough for the discharge to meet applicable water quality standards or the non-numeric effluent limits in this permit;

- An inspection or evaluation of your facility by a NDEE official, EPA official, or local entity, determines that modifications to the control measures are necessary;
- You find in your routine facility inspection, quarterly visual assessment, or comprehensive site inspection that your control measures are not being properly operated and maintained; or
- Whenever a visual assessment shows evidence of storm water pollution (e.g., color, odor, floating solids, settled solids, suspended solids, foam).

3.1.2 Conditions Requiring Review to Determine if Modifications Are Necessary. If construction or a change in design, operation, or maintenance at your facility occurs that significantly changes the nature of pollutants discharged in storm water from your facility, or significantly increases the quantity of pollutants discharged, you must review the selection, design, installation, and implementation of your control measures to determine if modifications are necessary to meet the effluent limits in this permit. You must also review and modify your SWPPP (e.g., sources of pollution, spill and leak procedures, non-storm water discharges, selection, design, installation and implementation of your storm water control measures) as needed, per Part 5.2.

3.1.3 Corrective Action Deadlines. You must immediately take all reasonable steps to minimize or prevent the discharge of pollutants until you can implement a permanent solution, including cleaning up any contaminated surfaces so that the material will not discharge in subsequent storm events. You must document your discovery of any of the conditions listed in Parts 3.1.1 and 3.1.2 within 24 hours of making such discovery.

If additional actions are necessary, you must complete the corrective actions before the next storm event, if possible, and within 14 calendar days from the time of discovery. If it is infeasible to complete the corrective action within the 14-day timeframe, you must document why. You must also identify your schedule for completing the work, which must be done as soon as practicable after the 14-day timeframe but no longer than 45 days after discovery. This timeframe may be extended by the Department upon request with your rationale for extension and completion date. You must document any corrective action(s) to be taken to eliminate or further investigate the deficiency, or if no corrective action is needed, the basis for that determination. Specific documentation required within 24 hours and 14 days is detailed in Part 3.3. Where your corrective actions result in changes to any of the controls or procedures documented in your SWPPP, you must modify your SWPPP accordingly within 14 calendar days of completing corrective action work.

These time intervals are not grace periods, but are schedules considered reasonable for documenting your findings and for making repairs and improvements. They are included in this permit to ensure that the conditions prompting the need for these repairs and improvements are not allowed to persist indefinitely.

3.1.4 Effect of Corrective Action. If the event triggering the review is a permit violation (e.g., non-compliance with an effluent limit), correcting it does not remove the original violation. Additionally, failing to take corrective action in accordance with this section is an additional permit violation. The Department will consider the appropriateness and promptness of your corrective action in determining enforcement responses to permit violations.

3.1.5 Substantially Identical Outfalls. If the event triggering corrective action is linked to an outfall that represents other substantially identical outfalls, see Part 4.2.3, your review must assess the need for corrective action for all related substantially identical outfalls. Any necessary changes to control measures that affect these other outfalls must also be made before the next storm event if possible, or as soon as practicable following that storm event. Any corrective actions must be conducted within the timeframes set forth in Part 3.1.3.

3.2 Additional Implementation Measures (AIM)

If any of the following additional implementation measures (AIM) triggering events in Parts 3.2.3, 3.2.4, or 3.2.5 occur, you must follow the response procedures described in those parts, called “additional implementation measures” or “AIM.” There are three AIM levels: AIM Level 1, AIM Level 2, and AIM

Level 3. You must respond as required to different AIM levels which prescribe sequential and increasingly robust responses when a benchmark exceedance occurs. You must follow the corresponding AIM level responses and deadlines described in Parts 3.2.1, 3.2.2, and 3.2.3 unless you qualify for an exception under Part 3.2.6.

3.2.1 Baseline Status. Once you receive discharge authorization under this permit per Part 1.3, you are in a baseline status for all applicable benchmark parameters. If an AIM triggering event occurs and you have proceeded sequentially to AIM Level 1, 2, or 3, you may return directly to baseline status once the corresponding AIM-level response and conditions are met.

3.2.2 AIM Triggering Events. If an annual average exceeds an applicable benchmark threshold based on the following events, the AIM requirements have been triggered for that benchmark parameter. You must follow the corresponding AIM-level responses and deadlines described in Parts 3.2.3, 3.2.4, and 3.2.5 unless you qualify for an exception under Part 3.2.6. An annual average exceedance for a parameter can occur if:

3.2.2.1 The four-quarterly annual average for a parameter exceeds the benchmark threshold, or

3.2.2.2 Fewer than four quarterly samples are collected, but a single sample or the sum of any sample results within the sampling year exceeds the benchmark threshold by more than four times for a parameter. This result indicates an exceedance is mathematically certain (i.e., the sum of quarterly sample results to date is already more than four times the benchmark threshold). For pH, an annual average exceedance can only occur if the four-quarter annual average exceeds the benchmark threshold.

3.2.3 AIM Level 1. Your status changes from baseline to AIM Level 1 if quarterly benchmark monitoring results indicate that an AIM triggering event per Part 3.2.2 has occurred, unless you qualify for an exception under Part 3.2.6.

3.2.3.1 AIM Level 1 Responses. If any of the triggering events in Part 3.2.2 occur, you must:

a. Review SWPPP/Storm Water Control Measures. Immediately review your SWPPP and the selection, design, installation, and implementation of your storm water control measures to ensure the effectiveness of your existing measures and determine if modifications are necessary to meet the benchmark threshold for the applicable parameter. Examples may include: review sources of pollution, spill and leak procedures, and/or non-storm water discharges; conducting a single comprehensive clean-up, making a change in subcontractor, implementing a new control measure, and/or increasing inspections.

b. Implement Additional Measures. After reviewing your SWPPP/storm water control measures, you must implement additional measures, considering good engineering practices, that would reasonably be expected to bring your exceedances below the parameter's benchmark threshold; or if you determine nothing further needs to be done with your storm water control measures, you must document per Part 5.3 why you expect your existing control measures to bring your exceedances below the parameter's benchmark threshold for the next 12-month period.

3.2.3.2 AIM Level 1 Deadlines. If any modifications to or additional control measures are necessary in response to AIM Level 1, you must implement those modifications or control measures within 14 days of receipt of laboratory results, unless doing so within 14 days is infeasible. If doing so within 14 days is infeasible, you must document per Part 3.3 why it is infeasible and implement such modifications within 45 days.

3.2.3.3 Continue Quarterly Benchmark Monitoring. After compliance with AIM Level 1 responses and deadlines, you must continue quarterly benchmark monitoring for the next four quarters for the parameter(s) that caused the AIM triggering event at all affected storm water discharge points, beginning no later than the next full quarter after compliance.

3.2.3.4 AIM Level 1 Status Update. While in AIM Level 1 status, you may either:

a. Return to Baseline Status. Your AIM Level 1 status will return to baseline status if the AIM Level 1 responses have been met and continued quarterly benchmark monitoring results indicate that an AIM triggering event per Part 3.2.2 has not occurred after four quarters of monitoring (i.e., the benchmark threshold is no longer exceeded for the parameter(s)). You may discontinue benchmark monitoring for that parameter until monitoring resumes in year 4 of permit coverage per Part 6.2.2.2 or if you have fulfilled all benchmark monitoring requirements per Part 6.2.2.2, then you may discontinue monitoring for that parameter for the remainder of the permit.

b. Advance to AIM Level 2. Your AIM Level 1 status advances to AIM Level 2 status if you have completed AIM Level 1 responses and the continued quarterly benchmark monitoring results indicate that an AIM triggering event per Part 3.2.2 has occurred (i.e., the benchmark threshold continues to be exceeded for the same parameter(s)).

3.2.4 AIM Level 2. Your status changes from AIM Level 1 to AIM Level 2 if your continued quarterly benchmark monitoring results indicate that an AIM triggering event per Part 3.2.2 has occurred (i.e., the benchmark threshold continues to be exceeded for the parameter(s)), unless you qualify for an exception under Part 3.2.6.

3.2.4.1 AIM Level 2 Responses. If any of the events in Part 3.2.2 occur, you must review your SWPPP and implement additional pollution prevention/good housekeeping storm water control measures, considering good engineering practices, beyond what you did in your AIM Level 1 responses that would reasonably be expected to bring your exceedances below the parameter's benchmark threshold. Refer to the EPA MSGP sector-specific fact sheets for recommended controls found at: <https://www.epa.gov/npdes/stormwater-discharges-industrial-activities-fact-sheets-and-guidance>.

3.2.4.2 AIM Level 2 Deadlines. You must implement additional pollution prevention/good housekeeping storm water control measures within 14 days of receipt of laboratory results that indicate an AIM triggering event has occurred and document per Part 3.3 how the measures will achieve benchmark thresholds. If it is feasible for you to implement a measure, but not within 14 days, you may take up to 45 days to implement such measure. You must document per Part 3.3 why it was infeasible to implement such measure in 14 days. The Department may also grant you an extension beyond 45 days, based on an appropriate demonstration by you, the operator.

3.2.4.3 Continue Quarterly Benchmark Monitoring. After compliance with AIM Level 2 responses and deadlines, you must continue quarterly benchmark monitoring for the next four quarters for the parameter(s) that caused the AIM triggering event at all affected discharge points, beginning no later than the next full quarter after compliance.

3.2.4.4 AIM Level 2 Status Update. While in AIM Level 2 status, you may either:

a. Return to Baseline Status. Your AIM Level 2 status will return to baseline status if the AIM Level 2 responses have been met and the continued quarterly benchmark monitoring results indicate that an AIM triggering event per Part 3.2.2 has not occurred after four quarters of monitoring (i.e., the benchmark threshold is no longer exceeded for the parameter(s)). You may discontinue benchmark monitoring for that parameter until monitoring resumes in year 4 of permit coverage per Part 6.2.2.2, or if you have fulfilled all benchmark monitoring requirements per Part 6.2.2.2, then you may discontinue monitoring for that parameter for the remainder of the permit.

b. Advance to AIM Level 3. Your AIM Level 2 status advances to AIM Level 3 status if you have completed the AIM Level 2 responses and the continued quarterly benchmark monitoring results indicate that an AIM triggering event per Part 3.2.2 has occurred (i.e., the benchmark threshold continues to be exceeded for the same parameter(s)).

3.2.5 AIM Level 3. Your status changes from AIM Level 2 to AIM Level 3 if your continued quarterly benchmark monitoring results indicate that an AIM triggering event per Part 3.2.2 has occurred (i.e., the benchmark threshold continues to be exceeded for the parameter(s)), unless you qualify for an exception per Part 3.2.6.

3.2.5.1 AIM Level 3 Responses. If any of the triggering events in Part 3.2.2 occur, you must install structural source controls (e.g., permanent controls such as permanent cover, berms, and secondary containment), and/or treatment controls (e.g., sand filters, hydrodynamic separators, oil-water separators, retention ponds, and infiltration structures), except as provided in Part 3.2.6. The controls or treatment technologies or treatment train you install should be appropriate for the pollutants that triggered AIM Level 3 and should be more rigorous than the pollution prevention/good housekeeping-type storm water control measures implemented under AIM Tier 2 in Part 3.2.4. You must select controls with pollutant removal efficiencies that are sufficient to bring your exceedances below the benchmark threshold. You must install such storm water control measures for the discharge point(s) in question and for substantially identical outfalls, unless you individually monitor those substantially identical outfalls and demonstrate that AIM Level 3 requirements are not triggered at those discharge points.

3.2.5.2 AIM Level 3 Deadlines. You must identify the schedule for installing the appropriate structural source and/or treatment storm water control measures within 14 days and install such measures within 60 days. If it is not feasible within 60 days, you may take up to 90 days to install such measures, documenting in your SWPPP per Part 3.3 why it is infeasible to install the measure within 60 days. The Department may also grant you an extension beyond 90 days, based on an appropriate demonstration by you, the operator.

3.2.5.3 Continue Quarterly Benchmark Monitoring. After compliance with AIM Level 3 responses and deadlines, you must continue quarterly benchmark monitoring for the next four quarters for the parameter(s) that caused the AIM triggering event at all affected discharge points, beginning no later than the next full quarter after compliance.

3.2.5.4 AIM Level 3 Status Update. While in AIM Level 3 status, you may either:

a. Return to Baseline Status. Your AIM Level 3 status will return to baseline status if the AIM Level 3 response(s) have been met and the continued quarterly benchmark monitoring results indicate that an AIM triggering event per Part 3.2.2 has not occurred after four quarters of monitoring (i.e., the benchmark threshold is no longer exceeded for the parameter(s)). You may discontinue benchmark monitoring for that parameter until monitoring resumes in what would be year 4 of permit coverage per Part 6.2.2.2, or if you have fulfilled all benchmark monitoring requirements per Part 6.2.2.2, then you may discontinue monitoring for that parameter for the remainder of the permit.

b. Continue in AIM Level 3. Your AIM Level 3 status will remain at Level 3 if you have completed the AIM Level 3 responses and the continued quarterly benchmark monitoring results indicate that an AIM triggering event per Part 3.2.2 has occurred (i.e., the benchmark threshold continues to be exceeded for the same parameter(s)). You must continue quarterly benchmark monitoring for the next four quarters for the parameter(s) that caused the AIM triggering event at all affected discharge points, beginning no later than the next full quarter after compliance. If you continue to exceed the benchmark threshold for the same parameter even after compliance with AIM Level 3, the Department may require you to apply for an individual permit.

3.2.6 AIM Exceptions. Following the occurrence of an AIM triggering event per Part 3.2.2, at any point or tier level of AIM and following four quarters of benchmark monitoring (or sooner if the exceedance is triggered by less than four quarters of data), you may qualify for an exception below from AIM requirements and continued benchmark monitoring. Regardless of if you qualify for and claim an exception, you must still review your storm water control measures, SWPPP, and other on-site activities to determine if actions or modifications are necessary or appropriate in light of your benchmark

exceedance(s). If claiming an AIM exception, you must follow the requirements to demonstrate that you qualify for the exception as provided below. If you qualify for an exception, you are not required to comply with the AIM responses or the continuation of quarterly benchmark monitoring for any parameters for which you can demonstrate that the benchmark exceedance is:

3.2.6.1 Solely Attributable to Natural Background Pollutant Levels. You must demonstrate that the benchmark exceedance is solely attributable to the presence of that pollutant in natural background sources, provided that all the following conditions are met and you submit your analysis and documentation to the Department upon request:

a. The four-quarter average concentration of your benchmark monitoring results (or fewer than four-quarters of data that trigger an exceedance) is less than or equal to the concentration of that pollutant in the natural background; and

b. You document and maintain with your SWPPP, as required in Part 5.4, your supporting rationale for concluding that benchmark exceedances are in fact attributable solely to natural background pollutant levels. You must include in your supporting rationale any data previously collected by you or others (including literature studies) that describe the levels of natural background pollutants in your storm water discharge. Natural background pollutants are those substances that are naturally occurring in soils or ground water. Natural background pollutants do not include legacy pollutants from earlier activity on your site, or pollutants in run-on from neighboring sources which are not naturally occurring, such as other industrial facilities or roadways.

3.2.6.2 Due to Run-On. You must demonstrate and obtain NDEE agreement that run-on from a neighboring source (e.g., a source external to your facility) is the cause of the exceedance, provided that all the following conditions are met and you submit your analysis and documentation to the Department for concurrence:

a. After reviewing and revising your SWPPP, as appropriate, you should notify the other facility or entity contributing run-on to your discharges and request that they abate their pollutant contribution.

b. If the other facility or entity fails to take action to address their discharges or sources of pollutants, you should contact the Department.

3.2.6.3 Due to an abnormal event. You must immediately document per Part 3.3 that the AIM triggering event was abnormal, a description explaining what caused the abnormal event, and how any measures taken within 14 days of such event will prevent a reoccurrence of the exceedance. You must also collect a sample during the next measurable storm event to demonstrate that the result is less than the benchmark threshold, in which case you do not trigger any AIM requirements based on the abnormal event. You may avail yourself of the "abnormal" demonstration opportunity at any AIM Level, one time per parameter, and one time per discharge point, which shall include substantially identical discharge points, provided you qualify for the exception.

3.2.6.4 Demonstrated to not result in any exceedance of water quality standards. You must demonstrate to the Department within 30 days of the AIM triggering event that the triggering event does not result in any exceedance of water quality standards. If it is not feasible to complete this demonstration within 30 days, you may take up to 90 days, documenting in your SWPPP why it is infeasible to complete the demonstration within 30 days. The Department may also grant you an extension beyond 90 days, based on an appropriate demonstration by you, the operator. The demonstration to the NDEE must include the following minimum elements in order to be considered for approval by the Department:

- The water quality standards applicable to the receiving water;
- The average flow rate of the storm water discharge;

- The average instream flow rates of the receiving water immediately upstream and downstream of the discharge point;
- The ambient concentration of the parameter(s) of concern in the receiving water immediately upstream and downstream of the discharge point demonstrated by full-storm composite sampling;
- The concentration of the parameter(s) of concern in the storm water discharge demonstrated by full-storm, flow-weighted composite sampling;
- Any relevant dilution factors applicable to the discharge; and
- The hardness of the receiving water.

The Department will review and either approve or disapprove of such demonstration within 90 days of receipt (NDEE may take up to 180 days upon notice to you before the 90th day that the Department needs additional time). If the Department approves such demonstration within this timeframe, you have met the requirements for this exception, and you do not have to comply with the corresponding AIM requirements and continued benchmark monitoring. If the Department disapproves such demonstration within this timeframe, you must comply with the corresponding AIM requirements and continued benchmark monitoring, as required. Compliance with the AIM requirements would begin from the date the Department notifies you of the disapproval.

3.3 Corrective Action and AIM Documentation

3.3.1 Documentation within 24 hours. Within 24 hours of discovery of any condition listed in Parts 3.1.1, 3.1.2, 3.2.3, 3.2.4, or 3.2.5 you must document the following information (i.e., Section 1 of the Corrective Actions Form, provided in Attachment 3):

- Description of the condition or event triggering the need for corrective action review. For any spills or leaks, include the following information: a description of the incident including material, date/time, amount, location, and reason for spill, and any leaks, spills or other releases that resulted in discharges of pollutants to waters of the state, through storm water or otherwise;
- Date the condition or triggering event was identified;
- Description of immediate actions taken pursuant to Part 3.1.3 to minimize or prevent the discharge of pollutants. For any spills or leaks, include response actions, the date/time of clean up completion, and notifications made. Also include any measures taken to prevent the reoccurrence of such releases (see Part 2.1.2.4); and
- A statement, signed and certified in accordance with Appendix A, section 12.

3.3.2 Documentation with 14 days. Within 14 days of discovery of any condition listed in Parts 3.1.1, 3.1.2, 3.2.3, 3.2.4, or 3.2.5 you must document the following information (i.e., Section 2 of the Corrective Actions Form, provided in Attachment 3):

- Summary of corrective action taken or to be taken (or, for triggering events identified in Part 3.1.2 where you determine that corrective action is not necessary, the basis for this determination);
- Notice of whether SWPPP modifications are required as a result of this discovery or corrective action;
- Date corrective action and/or AIM response initiated; and
- Date corrective action and/or AIM response completed or expected to be completed. If you requested an extension of the timeframe described in Part 3.1.3, 3.2.3, 3.2.4, or 3.2.5 include your documentation and rationale.

You must submit this documentation to the Department within 30 days of initial discovery and retain a copy onsite with your SWPPP as required in Part 5.4.

4 Inspections

You must conduct routine facility inspections, quarterly visual assessments, and annual comprehensive inspections as described in this Part. These inspections must be performed by qualified personnel (as defined in Appendix B) with at least one member of your storm water pollution prevention team (see Part

5.1.1) participating. Should your coverage be administratively continued after the expiration date of this permit, you must continue to perform these inspections until you are no longer covered as described in Part 1.3.2.

4.1 Routine Facility Inspections

4.1.1 Routine Facility Inspection Procedures. Conduct routine facility inspections during normal facility operating hours of all areas of the facility covered by the requirements in this permit, including, but not limited to:

- Areas where industrial materials or activities are exposed to storm water;
- Areas identified in the SWPPP and those that are potential pollutant sources (see Part 5.1.3);
- Areas where spills and leaks have occurred in the past 3 years;
- All outfalls; and
- All storm water control measures used to comply with the effluent limits contained in this permit.

Routine facility inspections must be conducted at least quarterly (i.e., once each calendar quarter) or in some instances, more frequently (e.g., monthly). Increased frequency may be appropriate for some types of equipment, processes, and control measures, or areas of the facility with significant activities and materials exposed to storm water. At least once each calendar year, the routine facility inspection must be conducted during a period when storm water is discharging off-site or to an on-site storm water retention structure. You must specify the relevant inspection schedules in your SWPPP document as required in Part 5.1.5. Inspections conducted in addition to those required by this permit need not conform to requirements of this section. Only those inspections conducted for compliance of this permit must conform (i.e., weekly inspections of a high-risk portion of the facility does not need to include all areas of the facility or comply with the documentation requirements).

4.1.2 Routine Facility Inspection Documentation. You must document the findings of each routine facility inspection performed and maintain this documentation with your SWPPP as required in Part 5.4. You are not required to submit your routine facility inspection findings to the Department, unless specifically requested to do so. At a minimum, your documentation of each routine facility inspection must include:

- The inspection date and time;
- The name(s), title(s), and signature(s) of the inspector(s);
- Weather information and a description of any discharges occurring at the time of the inspection;
- Any previously unidentified discharges from and/or pollutants at the facility;
- Any evidence of, or the potential for, pollutants entering the drainage system;
- Any control measures needing maintenance or repairs;
- Any failed control measures that need replacement;
- Any incidents of noncompliance observed; and
- Any additional control measures needed to comply with the permit requirements.

Any corrective action required as a result of a routine facility inspection must be performed consistent with Part 3 of this permit.

4.1.3 Exceptions to Routine Facility Inspections.

Inactive and Unstaffed Sites: The requirement to conduct facility inspections on a routine basis does not apply at a facility that is inactive and unstaffed, as long as there are no industrial materials or activities exposed to storm water. Such a facility is only required to conduct an annual comprehensive site inspection in accordance with the requirements of Part 4.3. To invoke this exception, you must maintain a statement in your SWPPP pursuant to Part 5.1.5.2 indicating that the site is inactive and unstaffed, and that there are no industrial materials or activities exposed to precipitation, in accordance with the substantive requirements in NDEE Title 119, Chapter 10, Part 007.04C. The statement must be signed and certified in accordance with Appendix A, section 12.

If circumstances change and industrial materials or activities become exposed to storm water or your facility becomes active and/or staffed, this exception no longer applies, and you must immediately resume routine facility inspections. If you are not qualified for this exception at the time you are authorized under this permit, but during the permit term you become qualified because your facility becomes inactive and unstaffed, and there are no industrial materials or activities that are exposed to storm water, then you must include the same signed and certified statement as above and retain it with your records pursuant to Part 5.4.

Inactive and unstaffed facilities covered under Sectors G (Metal Mining), H (Coal Mines and Coal Mining-Related Facilities), and J (Non-Metallic Mineral Mining and Dressing), are not required to meet the “no industrial materials or activities exposed to storm water” standard to be eligible for this exception from routine inspections, consistent with the requirements established in Parts 8.G.8.4, 8.H.8.1, and 8.J.8.1.

4.2 Quarterly Visual Assessment of Storm water Discharges

4.2.1 Quarterly Visual Assessment Procedures. Once each quarter for the entire permit term, you must collect a storm water sample from each outfall (except as noted in Part 4.2.3) and conduct a visual assessment of each of these samples. For an industrial facility with an on-site storm water retention structure, visual assessments may be conducted on the storm water entering the structure. These samples are not required to be collected consistent with NDEE Title 119, Chapter 14, Part 001.10D (see 40 CFR Part 136) procedures but must be collected in such a manner that the samples are representative of the storm water discharge.

The visual assessment must be made:

- Using a storm water sample in a clean, colorless glass, or plastic container, and examined in a well-lit area;
- On samples collected within the first 30 minutes of an actual discharge from a storm event. If it is not possible to collect the sample within the first 30 minutes of discharge, the sample must be collected as soon as practicable after the first 30 minutes and you must document why it was not possible to take samples within the first 30 minutes. In the case of snowmelt, samples must be taken during a period with a measurable discharge from your site; and
- For storm events, on discharges that occur at least 72 hours (3 days) from the previous discharge. The 72-hour (3-day) storm interval does not apply if you document that less than a 72-hour (3-day) interval is representative for local storm events during the sampling period.

You must visually inspect the sample for the following water quality characteristics:

- Color;
- Odor;
- Clarity (diminished);
- Floating solids;
- Settled solids;
- Suspended solids;
- Foam;
- Oil sheen; and
- Other obvious indicators of storm water pollution.

Whenever the visual assessment shows evidence of storm water pollution, you must initiate the corrective action procedures described in Part 3.

4.2.2 Quarterly Visual Assessment Documentation. You must document the results of your visual assessments and maintain this documentation with your SWPPP as required in Part 5.4. Any corrective action required as a result of a quarterly visual assessment must be conducted consistent with Part 3 of this permit. You are not required to submit your visual assessment findings to the Department, unless specifically requested to do so. At a minimum, your documentation of the visual assessment must include:

- Sample location(s);
- Sample collection date and time, and visual assessment date and time for each sample;
- Personnel collecting the sample and conducting visual assessment, and their signatures;
- Nature of the discharge (i.e., runoff or snowmelt);
- Results of observations of the storm water discharge;
- Probable sources of any observed storm water contamination,
- If applicable, why it was not possible to take samples within the first 30 minutes; and
- A statement, signed and certified in accordance with Appendix A, section 12.

4.2.3 Exceptions to and Timing of Quarterly Visual Assessments.

Adverse Weather Conditions: When adverse weather conditions prevent the collection of samples during the quarter, you must take a substitute sample during the next qualifying storm event. Documentation of the rationale for no visual assessment for the quarter must be included with your SWPPP records as described in Part 5.4. Adverse conditions are those that are dangerous or create inaccessibility for personnel, such as local flooding, high winds, electrical storms, or situations that otherwise make sampling impractical, such as drought or extended frozen conditions.

Semi-Arid Climates: If your facility is located in a semi-arid climate where limited rainfall occurs during parts of the year, then your samples for the quarterly visual assessments may be distributed during seasons when precipitation occurs.

Snowmelt: At least one quarterly visual assessment must capture snowmelt discharge, as described in Part 6.1.3.

Inactive and Unstaffed Sites: The requirement for a quarterly visual assessment does not apply at a facility that is inactive and unstaffed, as long as there are no industrial materials or activities exposed to storm water. To invoke this exception, you must maintain a statement in your SWPPP as required in Part 5.1.5.2 indicating that the site is inactive and unstaffed, and that there are no industrial materials or activities exposed to precipitation, in accordance with the substantive requirements in NDEE Title 119, Chapter 10, Part 007.04C. The statement must be signed and certified in accordance with Appendix A, section 12.

If circumstances change and industrial materials or activities become exposed to storm water or your facility becomes active and/or staffed, this exception no longer applies, and you must immediately resume quarterly visual assessments. If you are not qualified for this exception at the time you are authorized under this permit, but during the permit term you become qualified because your facility becomes inactive and unstaffed, and there are no industrial materials or activities that are exposed to storm water, then you must include the same signed and certified statement as above and retain it with your records pursuant to Part 5.4.

Inactive and unstaffed facilities covered under Sectors G (Metal Mining), H (Coal Mines and Coal Mining-Related Facilities), and J (Non-Metallic Mineral Mining and Dressing), are not required to meet the “no industrial materials or activities exposed to storm water” standard to be eligible for this exception from quarterly visual assessment, consistent with the requirements established in Parts 8.G.8.4, 8.H.8.1, and 8.J.8.1.

Substantially Identical Outfalls: If your facility has two or more outfalls that you believe discharge substantially identical effluents, as documented in Part 5.1.5.2, you may conduct quarterly visual assessments of the discharge at just one of the outfalls and report that the results also apply to the substantially identical outfall(s) provided that you perform visual assessments on a rotating basis of each substantially identical outfall throughout the period of your coverage under this permit.

If storm water contamination is identified through visual assessment performed at a substantially identical outfall, you must assess and modify your control measures as appropriate for each outfall represented by the monitored outfall.

4.3 Comprehensive Site Inspections

4.3.1 Comprehensive Site Inspection Procedures. You must conduct annual comprehensive site inspections while you are covered under this permit. Annual, as defined in this Part, means once during each calendar year beginning with the period you are authorized to discharge under this permit. You are waived from having to perform a comprehensive site inspection for an inspection period, as defined above, if you obtain authorization to discharge less than three months before the end of that calendar year.

Your comprehensive site inspections must cover all areas of the facility affected by the requirements in this permit, including the areas identified in the SWPPP as potential pollutant sources (see Part 5.1.3) where industrial materials or activities are exposed to storm water, any areas where control measures are used to comply with the effluent limits contained in a site-specific NPDES Permit, and areas where spills and leaks have occurred in the past 3 years. The inspections must also include a review of monitoring data collected in accordance with Part 6.2. Inspectors must consider the results of the past year's visual and analytical monitoring when planning and conducting inspections. Inspectors must examine the following:

- Industrial materials, residue, or trash that may have or could come into contact with storm water;
- Leaks or spills from industrial equipment, drums, tanks, and other containers;
- Offsite tracking of industrial or waste materials, or sediment where vehicles enter or exit the site;
- Tracking or blowing of raw, final, or waste materials from areas of no exposure to exposed areas; and
- Control measures needing replacement, maintenance, or repair.

Storm water control measures required by this permit must be observed to ensure that they are functioning correctly. If discharge locations are inaccessible, nearby downstream locations must be inspected.

Your annual comprehensive site inspection may also be used as one of the routine inspections, as long as all components of both types of inspections are included.

4.3.2 Comprehensive Site Inspection Documentation. You must document the findings of each comprehensive site inspection and maintain this documentation with your SWPPP as required in Part 5.4. At a minimum, your documentation of the comprehensive site inspection must include:

- The date of the inspection;
- The name(s), title(s), and signature(s) of the inspector(s);
- Findings from the examination of areas of your facility identified in Part 4.3.1;
- All observations relating to the implementation of your control measures including:
 - Previously unidentified discharges from the site;
 - Previously unidentified pollutants in existing discharges;
 - Evidence of, or the potential for, pollutants entering the drainage system;
 - Evidence of pollutants in discharges and/or the receiving water;
 - Observations regarding the physical condition of and around the outfall(s), including flow dissipation devices;
 - Additional control measures needed to address any conditions requiring corrective action identified during the inspection;
- Any required revisions to the SWPPP resulting from the inspection;
- Any incidents of noncompliance observed or a certification stating the facility is in compliance with this permit (if there is no noncompliance);
- Any corrective action required as a result of the comprehensive site inspection must be performed consistent with Part 3 of this permit; and
- A statement, signed and certified in accordance with Appendix A, section 12.

5 Storm Water Pollution Prevention Plan (SWPPP)

You must prepare a SWPPP for your facility before submitting your NOI for permit coverage. If you prepared a SWPPP for coverage under a previous version of this permit, you must review and update the SWPPP to implement all provisions of this permit prior to submitting your NOI. The SWPPP does not contain effluent limitations; such limitations are contained in Parts 2 and 8 of the permit. The SWPPP is intended to document the selection, design, and installation of control measures which will be used to meet the permit's effluent limits. The SWPPP is a living document. You must keep your SWPPP up-to-date throughout your permit coverage, by making revisions and improvements to your storm water management program based on new information and experiences with wet weather events. Separate from the SWPPP, the additional documentation requirements (see Part 5.4) are so that you document the implementation (including inspection, maintenance, monitoring, and corrective action) of the permit requirements.

You shall prepare the SWPPP in accordance with good engineering practices and to industry standards. The SWPPP may be developed by the facility or by a third party, but it must be developed by a "qualified person" as defined in Appendix B and be must certified per the signature requirements in Part 5.1.7 (see also Appendix A, section 12).

5.1 Contents of Your SWPPP

For coverage under this permit, your SWPPP must contain all of the following elements:

- Storm water pollution prevention team (see Part 5.1.1);
- Site description (see Part 5.1.2);
- Summary of potential pollutant sources (see Part 5.1.3);
- Description of control measures (see Part 5.1.4);
- Schedules and procedures (see Part 5.1.5);
- Documentation to support eligibility pertaining to other federal laws (see Part 5.1.6); and
- Signature requirements (see Part 5.1.7).

Where your SWPPP refers to procedures in other facility documents, such as a Spill Prevention, Control and Countermeasure (SPCC) Plan or an Environmental Management System (EMS), copies of the relevant portions of those documents must be kept with your SWPPP.

5.1.1 Storm Water Pollution Prevention Team. You must identify the staff members (by name or title) that comprise the facility's storm water pollution prevention team as well as their individual responsibilities. Your storm water pollution prevention team is responsible for overseeing development of the SWPPP and any modifications to it. They are also responsible for implementing and maintaining control measures, and taking corrective actions when required. Each member of the storm water pollution prevention team must have ready access to either an electronic or paper copy of applicable portions of this permit, the most updated copy of your SWPPP, and other relevant documents or information that must be kept with the SWPPP.

5.1.2 Site Description. Your SWPPP must include the following:

- A description of the nature of the industrial activities at your facility;
- A general location map (e.g., U.S. Geological Survey (USGS) quadrangle map) with enough detail to identify the location of your facility and all receiving waters for your storm water discharges; and
- A site map showing:
 - Boundaries of the property and the size of the property in acres;
 - Location and extent of significant structures and impervious surfaces;
 - Directions of storm water flow (use arrows);
 - Locations of all storm water control measures;
 - Locations of all receiving waters, including wetlands, in the immediate vicinity of your facility. Indicate if any of the waters are impaired and, if so, whether the waters have TMDLs

- established. Also indicate if any of the waters are identified as a State Resource Waters or Public Drinking Supplies;
- Locations of all storm water conveyances including ditches, pipes, and swales;
 - Locations of potential pollutant sources identified under Part 5.1.3.2;
 - Locations where significant spills or leaks identified under Part 5.1.3.3 have occurred;
 - Locations of all storm water monitoring points;
 - Locations of storm water inlets and outfalls, with a unique identification code for each outfall (e.g., 001, 002), indicating if you are treating one or more outfalls as “substantially identical” under Parts 4.2.3, 5.1.5.2, and 6.1.1, and an approximate outline of the areas draining to each outfall;
 - If applicable, combined sewers, or municipal separate storm sewer systems, and where your storm water discharges to them;
 - Locations and descriptions of all allowable non-storm water discharges identified under Part 1.1.3; and
 - Locations of the following activities where such activities are exposed to precipitation:
 - o fueling stations;
 - o vehicle and equipment maintenance and/or cleaning areas;
 - o loading/unloading areas;
 - o locations used for the treatment, storage, or disposal of wastes;
 - o liquid storage tanks;
 - o processing and storage areas;
 - o immediate access roads and rail lines used or traveled by carriers of raw materials, manufactured products, waste material, or by-products used or created by the facility;
 - o transfer areas for substances in bulk; and
 - o machinery;
 - o locations and sources of run-on to your site from adjacent property that contains significant quantities of pollutants.

5.1.3 Summary of Potential Pollutant Sources. You must describe areas at your facility where industrial materials or activities are exposed to storm water and/or from which allowable non-storm water discharges originate. Industrial materials or activities include, but are not limited to: material handling equipment or activities; industrial machinery; raw materials; industrial production and processes; and intermediate products, by-products, final products, and waste products. Material handling activities include, but are not limited to: the storage, loading and unloading, transportation, disposal, or conveyance of any raw material, intermediate product, final product or waste product. For structures located in areas of industrial activity, you must be aware that the structures themselves are potential sources of pollutants. This could occur, for example, when metals such as aluminum or copper are leached from the structures as a result of acid rain.

For each area identified, the description must include:

5.1.3.1 Activities in the area. A list of the industrial activities exposed to storm water (e.g., material storage; equipment fueling, maintenance, and cleaning; cutting steel beams).

5.1.3.2 Pollutants. A list of the pollutant(s) or pollutant constituents (e.g., crankcase oil, zinc, sulfuric acid, and cleaning solvents) associated with each identified activity, which could be exposed to rainfall or snowmelt and could be discharge from your facility. The pollutant list must include all significant materials that have been handled, treated, stored, or disposed, and that have been exposed to storm water in the 3 years prior to the date you prepare or amend your SWPPP.

5.1.3.3 Spills and Leaks. You must document where potential spills and leaks could occur that could contribute pollutants to storm water discharges, and the corresponding outfall(s) that would be affected by such spills and leaks. You must document all significant spills and leaks of oil or toxic or hazardous substances that actually occurred at exposed areas, or that drained to a storm water conveyance, in the 3 years prior to the date you prepare or amend your SWPPP.

Note: Significant spills and leaks include, but are not limited to, releases of oil or hazardous substances in excess of quantities that are reportable under CWA Section 311 (see 40 CFR Part 110.6 and 40 CFR Part 117.21) or Section 102 of the Comprehensive Environmental Response, Compensation and Liability Act (CERCLA), 42 USC §9602. This permit does not relieve you of the reporting requirements of 40 CFR Part 110, 40 CFR Part 117, and 40 CFR Part 302 relating to spills or other releases of oils or hazardous substances.

5.1.3.4 Non-Storm Water Discharges. You must document that you have evaluated for the presence of non-storm water discharges and that all unauthorized discharges have been eliminated. Documentation of your evaluation must include:

- The date of any evaluation;
- A description of the evaluation criteria used;
- A list of the outfalls or onsite drainage points that were directly observed during the evaluation;
- The different types of non-storm water discharge(s) and source locations (see Part 1.1.3 for allowable non-storm water discharges); and
- If there are any unauthorized non-storm water discharges you must immediately take action(s), such as implementing control measures to eliminate the discharge(s) or seek an individual or alternate NPDES permit. (For example, a floor drain was sealed, a sink drain was re-routed to sanitary, or an NPDES permit application was submitted for an unauthorized cooling water discharge.) Include an explanation of the actions you took to immediately eliminate the discharge per Part 3.

5.1.3.5 Salt Storage. You must document the location of any storage piles containing salt used for deicing or other commercial or industrial purposes.

5.1.3.6 Sampling Data. Existing permitted facilities must summarize all storm water discharge sampling data collected at your facility during the previous permit term. The summary shall include a narrative description (and may include data tables/figures) that adequately summarizes the collected sampling data to support identification of potential pollution sources at your facility. New discharges and new sources must provide a summary of any available storm water runoff data.

5.1.4 Description of Control Measures to Meet Technology-Based and Water Quality-Based Effluent Limits. You must document the location and type of control measures you have installed and implemented at your site to comply with:

- Non-numeric effluent limits in Part 2.1.2, and where applicable in Part 8;
- Effluent limitations guidelines-based limits in Part 2.1.3;
- Water quality-based effluent limits in Part 2.2; and
- Any additional measures that formed the basis of eligibility regarding threatened and endangered species and historic properties in Parts 2.3.

You must also document, as appropriate, how you addressed the control measure selection and design considerations in Part 2.1.1. In addition, if applicable, document how the control measures at your site address both the pollutant sources identified in Part 5.1.3, and any storm water run-on that commingles with any discharges covered under this permit.

5.1.5 Schedules and Procedures.

5.1.5.1 Pertaining to Control Measures Used to Comply with the Effluent Limits in Part 2. The following must be documented in your SWPPP:

- Good Housekeeping (Part 2.1.2.2) – A schedule for regular pickup and disposal of waste materials, along with routine inspections for leaks and conditions of drums, tanks and containers;

- Maintenance (Part 2.1.2.3) – Preventative maintenance procedures, including regular inspections, testing, maintenance, and repair of all industrial equipment and systems, and control measures, to avoid situations that may result in leaks, spills, and other releases, and any back-up practices in place should a runoff event occur while a control measure is off-line;
- Spill Prevention and Response Procedures (Part 2.1.2.4) – Procedures for preventing and responding to spills and leaks, including notification procedures. You may reference the existence of other plans for SPCC developed for the facility under Section 311 of the CWA or BMP programs otherwise required by an NPDES permit for the facility, provided that you keep a copy of that other plan onsite and make it available for review consistent with Part 5.3;
- Erosion and Sediment Controls (Part 2.1.2.5) – If you use polymers and/or other chemical treatments as part of your controls, you must identify the polymers and/or chemical used and the purpose; and
- Employee Training (Part 2.1.2.9) – A schedule for your employee training plan including the requirements set forth in Part 2.1.2.9. Also include the content of the training; the frequency/schedule of training for employees who work in areas where industrial materials or activities are exposed to storm water, or who are responsible for implementing activities necessary to meet the conditions of this permit; and a log of the dates on which specific employees received training.

5.1.5.2 Pertaining to Inspections. You must document in your SWPPP your procedures for performing, as appropriate, the three types of inspections specified by this permit, including:

- Routine facility inspections (see Part 4.1);
- Quarterly visual assessment of storm water discharges (see Part 4.2); and
- Comprehensive site inspections (see Part 4.3).

For each type of inspection performed, your SWPPP must identify:

- Person(s) or positions of person(s) responsible for the inspection;
- Schedules for conducting inspections, including tentative schedule for facilities in climates with irregular storm water runoff discharges (see Part 4.2.3); and
- Specific items to be covered by the inspection, including schedules for specific outfalls.

If you are invoking the exception for inactive and unstaffed sites relating to routine facility inspections and quarterly visual assessments, you must include in your SWPPP the information to support this claim as required by Parts 4.1.3 and 4.2.3.

5.1.5.3 Pertaining to Monitoring. Prior to the beginning of any required monitoring period, you must document in your SWPPP your procedures for conducting the five types of analytical monitoring specified by this permit, where applicable to your facility, including:

- Indicator monitoring (Part 6.2.1);
- Benchmark monitoring (Part 6.2.2);
- Annual effluent limitations guidelines monitoring (Part 6.2.3);
- Impaired waters monitoring (Part 6.2.4); and
- Other monitoring as required by NDEE (Part 6.2.4).

For each type of monitoring, your SWPPP must document:

- Locations where samples are collected, including any determination that two or more outfalls are substantially identical;
- Parameters for sampling and the frequency of sampling for each parameter;
- Schedules for monitoring at your facility, including schedule for alternate monitoring periods for climates with irregular storm water runoff (see Part 6.1.6);
- Any numeric control values (benchmarks, effluent limitations guidelines, TMDL-related requirements, or other requirements) applicable to discharges from each outfall; and

- Procedures (e.g., responsible staff, logistics, laboratory to be used) for gathering storm event data, as specified in Part 6.1.

If you are invoking the exception for inactive and unstaffed sites for benchmark monitoring, you must include in your SWPPP the information to support this claim as required by Part 6.2.1.3.

You must document the following in your SWPPP if you plan to use the substantially identical outfall exception for your quarterly visual assessment requirements in Part 4.2 or your benchmark monitoring requirements in Part 6.2.1:

- Location of each of the substantially identical outfalls;
- Description of the general industrial activities conducted in the drainage area of each outfall;
- Description of the control measures implemented in the drainage area of each outfall;
- Description of the exposed materials located in the drainage area of each outfall that are likely to be significant contributors of pollutants to storm water discharges;
- An estimate of the runoff coefficient of the drainage areas (low = under 40%; medium = 40 to 65%; high = above 65%); and
- Why the outfalls are expected to discharge substantially identical effluents.

5.1.6 Documentation to Support Eligibility Considerations Under Other Federal Laws.

5.1.6.1 Documentation Regarding Endangered Species. You must keep with your SWPPP the documentation supporting your determination with regard to Part 1.1.4.5 (Endangered and Threatened Species and Critical Habitat Protection).

5.1.6.2 Documentation Regarding Historic Properties. You must keep with your SWPPP the documentation supporting your determination with regard to Part 1.1.4.6 (Historic Properties Preservation).

5.1.7 Signature Requirements. You must sign and date your SWPPP in accordance with Appendix A, section 12.

5.2 Required SWPPP Modifications

You must modify your SWPPP based on the corrective actions and deadlines required under Part 3. You must sign and date any SWPPP modifications in accordance with Appendix A, section 12.

5.3 SWPPP Availability

You must retain a complete copy of your current SWPPP required by this permit at the facility in any accessible format. A complete SWPPP includes any documents incorporated by reference and all documentation supporting your permit eligibility pursuant to Part 1.1 of this permit, as well as your signed and dated certification page. Regardless of the format, it must be immediately available to facility employees, EPA, NDEE, and the operator of an MS4 to which you discharge if applicable. The Department may provide access to portions of your SWPPP to a member of the public upon request, or to other Federal, State, or local agencies. Confidential Business Information (CBI) may be withheld from the public in accordance with the provisions of NDEE Title 115, Chapter 2. Unless specified elsewhere in this permit or in the request, you are required to furnish a copy of the SWPPP and any other information requested within 7 calendar days. Submissions shall be sent to the address provided in 7.5.1.

5.4 Additional Documentation Requirements

You are required to keep the following inspection, monitoring, and certification records with your SWPPP that together keep your records complete and up-to-date, and demonstrate your full compliance with the conditions of this permit:

- A copy of the NOI submitted to NDEE along with any correspondence exchanged between you and the Department specific to coverage under this permit;

- A copy of the acknowledgment you receive from the Department assigning your NPDES permit authorization number;
- A copy of this permit (an electronic copy easily available to SWPPP personnel is also acceptable);
- Descriptions and dates of any incidences of significant spills, leaks, or other releases that resulted in discharges of pollutants to waters of the state, through storm water or otherwise; the circumstances leading to the release and actions taken in response to the release; and measures taken to prevent the recurrence of such releases (see Part 2.1.2.4);
- Records of employee training, including date training received (see Part 2.1.2.9);
- Documentation of maintenance and repairs of control measures, including the date(s) of regular maintenance, date(s) of discovery of areas in need of repair/replacement, and for repairs, date(s) that the control measure(s) returned to full function, and the justification for any extended maintenance/repair schedules (see Part 2.1.2.3);
- All inspection reports, including the Routine Facility Inspection Reports (see Part 4.1), the Quarterly Visual Assessment Reports (see Part 4.2), and the Comprehensive Site Inspection Reports (see Part 4.3);
- Description of any deviations from the schedule for visual assessments and/or monitoring, and the reason for the deviations (e.g., adverse weather or it was impracticable to collect samples within the first 30 minutes of a measurable storm event) (see Parts 4.2.3, 6.1.5, 6.1.6);
- Corrective action documentation required per Part 3;
- Documentation of any benchmark exceedances and how they were responded to, including either (1) corrective action taken, (2) a finding that the exceedance was due to natural background pollutant levels, or (3) a finding that no further pollutant reductions were technologically available and economically practicable and achievable in light of best industry practice consistent with Part 6.2.1.2;
- Documentation to support any determination that pollutants of concern are not expected to be present above natural background levels if you discharge directly to impaired waters, and that such pollutants were not detected in your discharge or were solely attributable to natural background sources (see Part 6.2.2.2); and
- Documentation to support your claim that your facility has changed its status from active to inactive and unstaffed with respect to the requirements to conduct routine facility inspections (see Part 4.1.3), quarterly visual assessments (see Part 4.2.3), and/or benchmark monitoring (see Part 6.2.1.3).

6 Monitoring

You must collect and analyze storm water samples and document monitoring activities consistent with the procedures described in Part 6 and Appendix A, and any additional sector-specific requirements in Part 8. Refer to Part 7 for reporting and recordkeeping requirements.

6.1 Monitoring Procedures

6.1.1 Monitored Outfalls. Outfalls, or discharge points, for the purpose of this permit are locations where storm water exits the facility or property, including pipes, ditches, swales, and other structures that transport storm water (see Appendix B). Applicable monitoring requirements apply to each outfall authorized by this permit, except as otherwise exempt from monitoring as a “substantially identical outfall.” If your facility has two or more outfalls that you believe discharge substantially identical effluents, based on the similarities of the general industrial activities and control measures, exposed materials that may significantly contribute pollutants to storm water, and runoff coefficients of their drainage areas, you may monitor the effluent of just one of the outfalls and report that the results also apply to the substantially identical outfall(s). As required in Part 5.1.5.2, your SWPPP must identify each outfall authorized by this permit and describe the rationale for any substantially identical outfall determinations. The allowance for monitoring only one of the substantially identical outfalls is not applicable to any discharge points with numeric effluent limitations. You are required to monitor each discharge point covered by a numeric effluent limit as identified in Part 6.2.3.

Areas of true sheet flow discharges are not required to be monitored as outfalls unless you are notified by the Department, though the discharge is regulated under this permit. It should be noted that what begins as “sheet flow” has a tendency to concentrate and form gullies, which would then be considered a discrete conveyance. (See Appendix B for Monitored Outfall and Sheet Flow definitions.)

6.1.2 Commingled Discharges. If any authorized discharges commingle with discharges not authorized under this permit, you must conduct any required sampling of the authorized discharges at a point before they mix with other waste streams, to the extent practicable.

6.1.3 Measurable Storm Events. You must conduct all required monitoring on a storm event that results in an actual discharge from your site (“measurable storm event”) that follows the preceding measurable storm event by at least 72 hours (3 days). The 72-hour (3-day) storm interval does not apply if you are able to document that less than a 72-hour (3-day) interval is representative for local storm events during the sampling period. In the case of snowmelt, you must conduct monitoring at a time when a measurable discharge occurs at your site.

For each monitoring event, except snowmelt monitoring, you must identify the date and duration (in hours) of the rainfall event, rainfall total (in inches) for that rainfall event, and time (in days) since the previous measurable storm event. For snowmelt monitoring, you must identify the date of the sampling event and indicate that the sampling event was for snowmelt.

6.1.4 Sample Type. You must take a minimum of one grab sample from a discharge resulting from a measurable storm event as described in Part 6.1.3. You must collect samples within the first 30 minutes of a discharge associated with a measurable storm event. If it is not possible to collect the sample within the first 30 minutes of a measurable storm event, you must collect the sample as soon as possible after the first 30 minutes and keep documentation with the SWPPP explaining why it was not possible to take samples within the first 30 minutes. In the case of snowmelt, you must take a minimum of one grab sample during a period with a measurable discharge.

For indicator monitoring and benchmark monitoring, you may choose to use a composite sampling method instead of taking grab samples. This composite method may be either flow-weighted or time-weighted and performed manually or with the use of automated sampling equipment. For the purposes of this permit, a flow-weighted composite sample means a composite sample consisting of a mixture of aliquots collected at a constant or variable time interval, where the volume of each aliquot included in the composite sample is proportional to the estimated or measured incremental discharge volume at the time of the aliquot collection compared to the total discharge volume estimated or measured over the monitoring event. For the purposes of this permit, a time-weighted composite sample means a composite sample consisting of a mixture of equal volume aliquots collected at a regular defined time interval over a specific period of time. Composite sampling must be initiated during the first 30 minutes of the same storm event. If it is not possible to initiate composite sampling within the first 30 minutes of a measurable storm event, you must initiate composite sampling as soon as possible after the first 30 minutes and keep documentation with the SWPPP explaining why it was not possible to initiate composite sampling within the first 30 minutes. You must maintain all monitoring results per Part 7.2. Composite sampling may not be used in situations where hold times for processing or sample preservation requirements cannot be satisfied. For parameters measured in-situ with a probe or meter such as dissolved oxygen, conductivity, pH, or temperature, the composite sampling method shall be modified by calculating an average all individual measurements, weighted by flow volume if applicable.

6.1.5 Adverse Weather Conditions. When adverse weather conditions as described in Part 4.2.3 prevent the collection of samples according to the relevant monitoring schedule, you must take a substitute sample during the next qualifying storm event. Adverse weather does not exempt you from having to retain a benchmark monitoring report in accordance with your sampling schedule. You must document any failure to monitor as specified in Part 7.2, indicating the basis for not sampling during the usual reporting period.

6.1.6 Irregular Storm Water Runoff. If your facility is located in semi-arid climate where limited rainfall occurs during parts of the year or due to freezing conditions that prevent runoff from occurring for extended periods, you may distribute your required monitoring events during seasons when precipitation occurs, or when snowmelt results in a measurable discharge from your site. You must still collect the required number of samples, and indicate the revised schedule in your SWPPP.

6.1.7 Monitoring Periods. Monitoring requirements in this permit begin in the first full quarter following either April 1, 2022, or your date of discharge authorization, whichever date comes later. If your monitoring is required on a quarterly basis (e.g., benchmark monitoring), you must monitor at least once in each of the following 3-month intervals:

- January 1 – March 31;
- April 1 – June 30;
- July 1 – September 30; and
- October 1 – December 31.

For example, if you obtain permit coverage on August 2, 2022, then your first monitoring quarter is October 1 - December 31, 2022. This monitoring schedule may be modified in accordance with Part 6.1.6. You must indicate any 3-month interval that you did not take a sample.

6.1.8 Monitoring for Allowable Non-Storm Water Discharges. You are only required to monitor allowable non-storm water discharges (as delineated in Part 1.1.3) when they are commingled with storm water discharges associated with industrial activity.

6.1.9 Timing of Sample. All monitoring required in this permit should be conducted during the normal operating hours for the facility. When the collection of samples according to the relevant monitoring schedule is not possible due to the lack of a measurable storm event (as specified in Part 6.1.3) occurring during normal operating hours, you must take a substitute sample during the next qualifying storm event (which occurs during normal operating hours). Facilities which do not operate during rain events must consider normal operating hours to include such temporary shutdowns due to rain events. (This may result in the collection of more than one sample during a quarter; the substitute sample and the scheduled sample must be collected from separate qualifying events.)

Facilities are not required to monitor outside of normal operating hours but are not precluded from doing so at the discretion of the facility.

6.2 Required Monitoring

This permit includes five types of required analytical monitoring, one or more of which may apply to your discharge:

- Indicator monitoring (Part 6.2.1);
- Benchmark monitoring (Part 6.2.2);
- Annual effluent limitations guidelines monitoring (Part 6.2.3);
- Impaired waters monitoring (Part 6.2.4); and
- Other monitoring as required by NDEE (Part 6.2.4).

Unless otherwise specified, samples must be analyzed consistent with 40 CFR Part 136 analytical methods that are sufficiently sensitive for the monitored parameter. When more than one type of monitoring for the same pollutant at the same outfall applies, you may use a single sample to satisfy both monitoring requirements (i.e., one sample analysis satisfying both the impaired waters monitoring sample and one of the 4 quarterly benchmark monitoring samples). Similarly, when the same type of monitoring is required for the same pollutant but for different activities, you may use a single sample to satisfy both monitoring requirements.

When the effluent limitation is lower than the benchmark threshold for the same pollutant, your Additional Implementation Measure (AIM) trigger is based on an exceedance of the effluent limitation

threshold, which would subject you to the AIM requirements of Part 3.2. Exceedance of an effluent limitation associated with the results of any analytical monitoring type required by this Part subjects you to the corrective action requirements of Part 3.1. All required monitoring must be conducted in accordance with the procedures described in Appendix A.

Per Part 1.3.6, in the event that the permit is administratively continued, monitoring requirements remain in force and effect at their original frequency during any continuance for operators that were covered prior to permit expiration.

Table 6-1. Summary of Each Type of Monitoring

Monitoring Type	Applies To	Frequency	Duration	Follow-up Action	Permit Part Reference
Indicator – pH, TSS, COD	Subsectors B2, C5, D2, E3, F5, I1, J3, L2, N2, O1, P1, R1, T1, U3, V1, W1, X1, Y2, Z1, AB1, AC1, and AD1	Quarterly	Entirety of permit coverage	None	Part 6.2.1.1.a
Indicator – PAHs*	Sector A facilities that manufacture, use, or store creosote or creosote-treated wood in areas that are exposed to precipitation; and Sectors C (SIC 2911), D, F, H, I, M, O, P (SIC 4011, 4013, and 5171), Q (SIC 4491), R, and S	Biannually (2 times per year)	First year and fourth year	None	Part 6.2.1.1.b
Benchmark	Subsectors A1, A2, A3, A4, B1, C1, C2, C3, C4, D1, E1, E2, F1, F2, F3, F4, G1, G2, H1, J1, J2, K1, L1, M1, N1, Q1, S1, U1, U2, Y1, AA1, AA2	Quarterly	First year and fourth year	AIM - See Part 3.2	Part 6.2.2
Effluent limitation guidelines (ELG)	See Part 4.2.3	Annually	Entirety of permit coverage	See Part 5.1	Part 6.2.3
Impaired Waters	See Part 1.1.4.7	Annually	See Part 6.2.4.2		
Other as required by NDEE	See Part 6.2.5				

* Monitoring is required for the 16 individual PAHs identified at Appendix A to 40 CFR Part 423: naphthalene, acenaphthylene, acenaphthene, fluorene, phenanthrene, anthracene, fluoranthene, pyrene, benzo[a]anthracene, chrysene, benzo[b]fluoranthene, benzo[k]fluoranthene, benzo[a]pyrene, benzo[g,h,i]perylene, indeno[1,2,3-c,d]pyrene, and dibenz[a,h]anthracene.

6.2.1 Indicator Monitoring. This permit requires indicator monitoring of storm water discharges for three parameters – pH, Total Suspended Solids (TSS), and Chemical Oxygen Demand (COD) – for certain sectors/subsectors (see Part 6.2.1.1.a below) and for polycyclic aromatic hydrocarbons (PAHs) for certain sectors/activities, with additional limitations (see Part 6.2.1.1.b below). Indicator monitoring data will provide you and the Department with a baseline and comparable understanding of industrial storm water discharge quality and potential water quality problems. The indicator monitoring parameters are “report-only” and do not have thresholds or baseline values for comparison, therefore no follow-up action is triggered or required under this part. The requirement in Part 2.2.1 that your storm water discharge be controlled as necessary such that the receiving water will meet applicable water quality standards still applies. You may find it useful to evaluate and compare your indicator monitoring data over time to identify any fluctuating values and why they may be occurring, and to further inform any revisions to your SWPPP and storm water control measures if necessary. Indicator monitoring is report-only and is

neither benchmark monitoring nor an effluent limitation. Instead, it is a permit condition. Thus, failure to conduct indicator monitoring is a permit violation.

6.2.1.1 Applicability and Schedule of Indicator Monitoring.

a. pH, Total Suspended Solids (TSS), and Chemical Oxygen Demand (COD).

i. Applicability. Operators in the following subsectors must monitor storm water discharges for pH, TSS, and COD (also specified in the sector-specific requirements in Part 8): B2, C5, D2, E3, F5, I1, J3, L2, N2, O1, P1, R1, T1, U3, V1, W1, X1, Y2, Z1, AB1, AC1, and AD1). Samples must be analyzed consistent with 40 CFR Part 136 analytical methods.

ii. Schedule. You must conduct indicator monitoring of storm water discharges for pH, TSS, and COD each quarter, beginning in your first full quarter of permit coverage as identified in Part 6.1.7.

b. Polycyclic Aromatic Hydrocarbons (PAH).

i. Applicability. The following operators must monitor storm water discharges for the 16 individual priority pollutant PAHs (also specified in the sector-specific requirements in Part 8): operators in sectors A (facilities that manufacture, use, or store creosote or creosote-treated wood in areas that are exposed to precipitation), C (SIC Code 2911), D, F, H, I, M, O, P (SIC Codes 4011, 4013, and 5171), Q (SIC Code 4491), R, and S. Monitoring is required for the 16 individual PAHs identified at Appendix A to 40 CFR Part 423: naphthalene, acenaphthylene, acenaphthene, fluorene, phenanthrene, anthracene, fluoranthene, pyrene, benzo[a]anthracene, chrysene, benzo[b]fluoranthene, benzo[k]fluoranthene, benzo[a]pyrene, benzo[g,h,i]perylene, indeno[1,2,3-c,d]pyrene, and dibenz[a,h]anthracene. Samples must be analyzed using EPA Method 625.1, or EPA Method 610/Standard Method 6440B if preferred by the operator, consistent with 40 CFR Part 136 analytical methods.

ii. Schedule. You must conduct indicator monitoring of storm water discharges for PAHs biannually (i.e., sample twice per year) in the first and fourth years of permit coverage. Your first year of permit coverage begins in your first full quarter of permit coverage, identified in Part 6.1.7, followed by two years of no monitoring. Biannual monitoring resumes in your fourth year of permit coverage for another year, after which you may discontinue biannual PAH monitoring for the remainder of your permit coverage.

6.2.1.2 Exception for Facilities in Climates with Irregular Storm Water Discharges. As described in Part 6.1.6, facilities in climates with irregular storm water discharges may modify this schedule provided you keep this revised schedule with the facility's SWPPP as specified in Part 5.4. As noted in Part 6.1.7, you must indicate any 3-month interval that you did not take a sample.

6.2.1.3 Exception for Inactive and Unstaffed Sites. The requirement for indicator monitoring does not apply at a facility that is inactive and unstaffed, provided that there are no industrial materials or activities exposed to storm water. To invoke this exception, you must do the following:

- Maintain a statement with your SWPPP stating that the site is inactive and unstaffed, and that there are no industrial materials or activities exposed to storm water in accordance with the substantive requirements in NDEE Title 119, Chapter 10, Part 007.04C and sign and certify the statement in accordance with Appendix A, section 12; and
- If circumstances change and industrial materials or activities become exposed to storm water or your facility becomes active and/or staffed, this exception no longer applies, and you must immediately begin complying with the applicable indicator monitoring requirements under

Part 6.2.1 as if you were in your first year of permit coverage. You must notify the Department that your facility has materials or activities exposed to storm water or has become active and/or staffed.

- If you are not qualified for this exception at the time you are authorized under this permit, but during the permit term you become qualified because your facility is inactive and unstaffed, and there are no industrial materials or activities that are exposed to storm water, then you must notify the Department. You may discontinue indicator monitoring once you have notified the Department, and prepared and signed the certification statement described above in accordance with Appendix A, section 12, concerning your facility's qualification for this special exception.

Note: This exception has different requirements for Sectors G, H, and J (see Part 8).

6.2.2 Benchmark Monitoring. This permit requires benchmark monitoring parameters of storm water discharges for certain sectors/subsectors. Benchmark monitoring data are primarily for your use to determine the overall effectiveness of your control measures and to assist you in knowing when additional corrective action(s) may be necessary to comply with the effluent limitations in Part 2.

The benchmark thresholds are not effluent limitations; a benchmark exceedance, therefore, is not a permit violation. However, if a benchmark exceedance triggers Additional Implementation Measures (AIM) in Part 3.2, failure to conduct any required measures is a permit violation. At your discretion, you may take more than four samples during separate discharge events to determine the average benchmark parameter value for facility discharges.

6.2.2.1 Applicability of Benchmark Monitoring. You must monitor storm water discharges for any benchmark parameters specified for the industrial sector(s), both primary industrial activity and any co-located industrial activities, applicable to your discharge listed in Part 8. If your facility is in one of the industrial sectors subject to benchmark concentrations that are hardness-dependent, you are required to retain with your first benchmark report a hardness value, established consistent with the procedures in Appendix E, that is representative of your receiving water.

Samples must be analyzed consistent with 40 CFR Part 136 analytical methods and using test procedures with quantitation limits at or below benchmark values for all benchmark parameters for which you are required to sample.

6.2.2.2 Benchmark Monitoring Schedule. Benchmark monitoring of storm water discharges is required quarterly, as identified in Part 6.1.7, in the first and fourth year of permit coverage, as follows:

a. Year one of permit coverage. You must conduct benchmark monitoring for all parameters applicable to your subsector(s) for four quarters in your first year of permit coverage, beginning in your first full quarter of permit coverage.

- If the annual average for a parameter does not exceed the benchmark threshold, you can discontinue benchmark monitoring for that parameter for the next two years (i.e., eight quarters).
- If the annual average for a parameter exceeds the benchmark threshold, you must comply with Part 3.2 and continue quarterly benchmark monitoring for that parameter until results indicate that the annual average is no longer exceeded, after which you can discontinue benchmark monitoring for that parameter until monitoring resumes in year four of permit coverage, per Part 6.2.2.2.b below.

b. Year four of permit coverage. You must conduct benchmark monitoring for all parameters applicable to your subsector(s) for four quarters in your fourth year of permit coverage (i.e., your thirteenth through sixteenth quarters), unless the first quarter of your fourth year of permit coverage occurs on or after the date this permit expires.

- If the annual average for a parameter does not exceed the benchmark threshold, you can discontinue benchmark monitoring for that parameter for the remainder of your permit coverage.
- If the annual average for a parameter exceeds the benchmark threshold, you must comply with Part 3.2 and continue quarterly benchmark monitoring for that parameter until results indicate that the annual average is no longer exceeded, after which you can discontinue benchmark monitoring for that parameter for the remainder of permit coverage.

c. Natural background pollutant levels. Following the first 4 quarters of benchmark monitoring (or sooner if the exceedance is triggered by less than 4 quarters of data, see above), if the average concentration of a pollutant exceeds a benchmark value, and you determine that exceedance of the benchmark is attributable solely to the presence of that pollutant in the natural background, you are not required to perform corrective action or additional benchmark monitoring provided that:

- The average concentration of your benchmark monitoring results is less than or equal to the concentration of that pollutant in the natural background;
- You document and maintain with your SWPPP, as required in Part 5.4, your supporting rationale for concluding that benchmark exceedances are in fact attributable solely to natural background pollutant levels. You must include in your supporting rationale any data previously collected by you or others (including literature studies) that describe the levels of natural background pollutants in your storm water discharge; and
- You notify the Department with your determination that no further pollutant reductions are technologically available, economically practicable and achievable in light of best industry practice, and that the benchmark exceedances are attributable solely to natural background pollutant levels.

Natural background pollutants include those that occur naturally as a result of native soils and vegetation, wildlife, or ground water. Natural background pollutants do not include legacy pollutants from earlier activity on your site, or pollutants in run-on from neighboring sources that are not naturally occurring.

Note: For this permit, an annual average exceedance for a parameter can occur if: (a) The four-quarter annual average for a parameter exceeds the benchmark threshold; or (b) Fewer than four quarterly samples are collected, but a single sample or the sum of any sample results within the sampling year exceeds the benchmark threshold by more than four times for a parameter. The result in (b) indicates an exceedance is mathematically certain (i.e., the sum of quarterly sample results to date is already more than four times the benchmark threshold). For pH, an annual average exceedance can only occur if the four-quarter annual average exceeds the benchmark threshold.

6.2.2.3 Exception for Facilities in Climates with Irregular Storm Water Discharges. As described in Part 6.1.6, facilities in climates with irregular storm water discharges may modify this schedule provided you keep this revised schedule with the facility's SWPPP as specified in Part 5.4. As noted in Part 6.1.7, you must indicate any 3-month interval that you did not take a sample.

6.2.2.4 Exception for Inactive and Unstaffed Sites. The requirement for benchmark monitoring does not apply at a facility that is inactive and unstaffed, provided that there are no industrial materials or activities exposed to storm water. To invoke this exception, you must do the following:

- Maintain a statement with your SWPPP stating that the site is inactive and unstaffed, and that there are no industrial materials or activities exposed to storm water in accordance with the

- substantive requirements in NDEE Title 119, Chapter 10, Part 007.04C and sign and certify the statement in accordance with Appendix A, section 12; and
- If circumstances change and industrial materials or activities become exposed to storm water or your facility becomes active and/or staffed, this exception no longer applies, and you must immediately begin complying with the applicable benchmark monitoring requirements under Part 6.2.2 as if you were in your first year of permit coverage. You must notify the Department that your facility has materials or activities exposed to storm water or has become active and/or staffed.
 - If you are not qualified for this exception at the time you are authorized under this permit, but during the permit term you become qualified because your facility is inactive and unstaffed, and there are no industrial materials or activities that are exposed to storm water, then you must notify the Department. You may discontinue benchmark monitoring once you have notified the Department, and prepared and signed the certification statement described above in accordance with Appendix A, section 12, concerning your facility’s qualification for this special exception.

Note: This exception has different requirements for Sectors G, H, and J (see Part 8).

6.2.3 Effluent Limitations Monitoring. Storm water discharges from facilities subject to any of the national storm water-specific effluent limitations guidelines per Part 1.1.2.4 are authorized for coverage under this permit.

6.2.3.1 Monitoring Based on Effluent Limitation Guidelines. Table 6-2 identifies the storm water discharges subject to effluent limitation guidelines. An exceedance of the effluent limitation is a permit violation. Beginning in the first full quarter following your date of discharge authorization, you must monitor once per year at each storm water discharge point containing the discharges identified in Table 6-2 for the parameters specified in the sector-specific section of Part 8.

Regulated Activity	Effluent Limit	Monitoring Frequency	Sample Type
Discharges resulting from spray down or intentional wetting of logs at wet deck storage areas	See Part 8.A.7	1/year	Grab
Runoff from phosphate fertilizer manufacturing facilities that comes into contact with any raw materials, finished product, by-products or waste products (SIC 2874)	See Part 8.C.4	1/year	Grab
Runoff from asphalt emulsion facilities	See Part 8.D.4	1/year	Grab
Runoff from material storage piles at cement manufacturing facilities	See Part 8.E.5	1/year	Grab
Mine dewatering discharges at crushed stone, construction sand and gravel, or industrial sand mining facilities	See Part 8.J.9	1/year	Grab
Runoff from hazardous waste landfills	See Part 8.K.6	1/year	Grab
Runoff from non-hazardous waste landfills	See Part 8.L.10	1/year	Grab
Runoff from coal storage piles at steam electric generating facilities	See Part 8.O.7	1/year	Grab
Runoff containing urea from airfield pavement deicing at existing and new primary airports with 1,000 or more annual non-propeller aircraft departures	See Part 8.S.7	1/year	Grab

6.2.3.2 Substantially Identical Discharge Points Not Applicable. You must monitor each discharge point discharging storm water from any regulated activity identified in Table 6-2. The

substantially identical discharge points monitoring provisions are not available for numeric effluent limit monitoring.

6.2.3.3 Follow-up Actions if Discharge Exceeds Numeric Effluent Limitation. If any monitoring value exceeds a numeric effluent limitation contained in this permit, you must submit a report to the Department consistent with Part 7.3. You must monitor, at least quarterly, until your storm water discharge is in compliance with the effluent limit or until the Department waives the requirement for additional monitoring.

6.2.4 Discharges to Impaired Waters Monitoring.

6.2.4.1 Permittees Required to Monitor Discharges to Impaired Waters. If you discharge to an impaired water, you must monitor for all pollutants for which the waterbody is impaired and for which a standard analytical method exists in NDEE Title 119, Chapter 14, Part 001.02D (see 40 CFR Part 136).

No additional monitoring is required when a waterbody's biological communities are impaired but no pollutant, including indicator or surrogate pollutants, is specified as causing the impairment, or when a waterbody's impairment is related to hydrologic modifications, impaired hydrology, or other non-pollutant.

6.2.4.2 Impaired Waters Monitoring Schedule

Discharges to impaired waters without an EPA-approved or established TMDL: Monitoring is required annually beginning in the first full quarter following April 1, 2022, or your date of discharge authorization, whichever date comes later. You must monitor once per year at each outfall (except substantially identical outfalls) discharging storm water to impaired waters without an EPA-approved or established TMDL. This monitoring requirement does not apply after one year if the pollutant for which the waterbody is impaired is not detected above natural background levels in your storm water discharge, and you document, as required in Part 5.4, that this pollutant is not expected to be present above natural background levels in your discharge. If monitoring results indicate that the monitored pollutant is detected in your storm water discharge, or is outside the acceptable range for a given parameter (e.g., pH or temperature) for the waterbody to meet its designated use, you must continue to monitor for the pollutant(s) annually until no longer detected, after which you may discontinue monitoring for that pollutant.

If the pollutant for which the water is impaired is not present and not expected to be present in your discharge, or it is present, but you have determined that its presence is caused solely by natural background sources, you are required to submit a notification to this effect to the Department, after which you may discontinue annual monitoring. To support a determination that the pollutant's presence is caused solely by natural background sources, you must keep the following documentation with your SWPPP records:

- An explanation of why you believe that the presence of the pollutant causing the impairment in your discharge is not related to the activities or materials at your facility; and
- Data and/or studies that tie the presence of the pollutant causing the impairment in your discharge to natural background sources in the watershed.

Natural background pollutants include those substances that occur naturally as a result of native soils, and vegetation, wildlife, or ground water. Natural background pollutants do not include legacy pollutants from earlier activity on your site, or pollutants in run-on from neighboring sources which are not naturally occurring.

Discharges to impaired waters with an EPA-approved or established TMDL: For storm water discharges to waters for which there is an EPA-approved or established TMDL, you are not required to monitor for the pollutant(s) for which the TMDL was written unless the Department informs you, upon examination of the applicable TMDL and its wasteload allocation (WLA), that

you are subject to such a requirement consistent with the assumptions of the applicable TMDL and its WLA. The Department's notice will include specifications on monitoring parameters and frequency.

6.2.2.3 Exception for Inactive and Unstaffed Sites. The requirement for impaired waters monitoring does not apply at a facility that is inactive and unstaffed, provided that there are no industrial materials or activities exposed to storm water. To invoke this exception, you must do the following:

- Maintain a statement with your SWPPP stating that the site is inactive and unstaffed, and that there are no industrial materials or activities exposed to storm water in accordance with the substantive requirements in NDEE Title 119, Chapter 10, Part 007.04C and sign and certify the statement in accordance with Appendix A, section 12; and
- If circumstances change and industrial materials or activities become exposed to storm water or your facility becomes active and/or staffed, this exception no longer applies, and you must immediately begin complying with the applicable impaired waters monitoring requirements under Part 6.2.4. You must notify the Department that your facility has materials or activities exposed to storm water or has become active and/or staffed.
- If you are not qualified for this exception at the time you are authorized under this permit, but during the permit term you become qualified because your facility is inactive and unstaffed, and there are no industrial materials or activities that are exposed to storm water, then you must notify the Department. You may discontinue benchmark monitoring once you have notified the Department, and prepared and signed the certification statement described above in accordance with Appendix A, section 12, concerning your facility's qualification for this special exception.

Note: This exception has different requirements for Sectors G, H, and J (see Part 8).

6.2.5 Additional Monitoring Required by NDEE. The Department may notify you of additional discharge monitoring requirements. Any such notice will briefly state the reasons for the monitoring, locations, and parameters to be monitored, frequency and period of monitoring, sample types, and reporting requirements.

7 Reporting and Recordkeeping

7.1 Electronic Reporting

The NPDES Electronic Reporting Rule, published October 22, 2015, requires electronic reporting of NPDES information rather than the previously required paper-based reports from the permitted facilities. You are required by 40 CFR Part 127 to submit NOIs, NOTs, and other reports as they become available, electronically on the NDEE website unless the Department grants a waiver.

You may submit a request for an electronic reporting waiver to the Department if your headquarters is physically located in a geographic area that is identified as under-served for broadband internet by the Federal Communications Commission, or you have limitations regarding computer access. Your request must document the conditions you meet and provide evidence supporting your claims. The Department will either approve or deny this electronic reporting waiver request. The duration of a temporary waiver may not exceed 5 years, which is the normal period for an NPDES permit term. Temporary waivers may be granted for a one-time use for a single information submittal. A waiver may only be considered granted once you receive written confirmation from the Department.

7.2 Reporting Monitoring Data to NDEE

All monitoring data collected pursuant to Parts 6.2 must be maintained with the SWPPP after you have received your complete laboratory results for all monitored outfalls for the reporting period. Upon request by the Department, reporting forms must be submitted within fourteen days to the appropriate address identified in Part 7.5.1. The Department strongly recommends that you use the ISW storm event monitoring report (ISW-SEMR), see Attachment 4.

7.3 Additional Reporting

In addition to the reporting requirements stipulated in Part 7, you are also subject to the standard permit reporting provisions of Appendix A.

Where applicable, you must submit the following reports to the Department at the address listed in Part 7.5.1. If you discharge through an MS4, you must also submit these reports to the MS4 operator (if required or requested by the MS4). See Appendix F for a list of MS4s.

- 24-hour reporting (Appendix A, section 14.g) – You must report any noncompliance which may endanger health or the environment. Any information must be provided orally within 24 hours from the time you become aware of the circumstances;
- 5-day follow-up reporting to the 24-hour reporting (Appendix A, section 14.g) – A written submission must also be provided within 5 days of the time you become aware of the circumstances; and
- Reportable quantity spills (Part 2.1.2.4) – You must provide notification, as required under Part 2.1.2.4, as soon as you have knowledge of a leak, spill, or other release containing a hazardous substance or oil in an amount equal to or in excess of a reportable quantity.
- Planned changes (Appendix A, section 14.a) – You must give notice to the Department as soon as possible of any planned physical alterations or additions to the permitted facility that qualify the facility as a new source or that could significantly change the nature or significantly increase the quantity of pollutants discharged;
- Anticipated noncompliance (Appendix A, section 14.b) – You must give advance notice to the Department of any planned changes in the permitted facility or activity which you anticipate will result in noncompliance with permit requirements;
- Transfer of ownership and/or operation – You must submit a complete and accurate NOI electronically on the NDEE website in accordance with the requirements of Part 1.3 and by the deadlines specified in Table 1-2;
- Compliance schedules (Appendix A, section 14.f) – Reports of compliance or noncompliance with, or any progress reports on, interim and final requirements contained in any compliance schedule of this permit must be submitted no later than 14 days following each schedule date;
- Other noncompliance (Appendix A, section 14.h) – You must report all instances of noncompliance not reported in your monitoring report (pursuant to Part 7.2), compliance schedule report, or 24-hour report at the time monitoring reports are submitted; and
- Other information (Appendix A, section 14.i) – You must promptly submit facts or information if you become aware that you failed to submit relevant facts in your NOI, or that you submitted incorrect information in your NOI or in any report.

7.4 Recordkeeping

You must retain copies of your SWPPP (including any modifications made during the term of this permit), additional documentation requirements pursuant to Part 5.4 (including documentation related to corrective actions taken pursuant to Part 3), all reports and certifications required by this permit, monitoring data, and records of all data used to complete the NOI to be covered by this permit, for a period of at least 3 years from the date that your coverage under this permit expires or is terminated.

7.5 Addresses for Reports

7.5.1 NDEE Address. Paper copies of any reports required in Part 6 and 7 must be sent to the following address:

Via U.S. mail:

Nebraska Department of Environment and Energy
NPDES and State Permits Section, Industrial Storm Water
PO Box 98922
Lincoln, NE 68509-8922

7.5.2 Submissions to MS4s. If required or upon request, copies of all required submissions to the Department shall be concurrently submitted to the appropriate Municipal Separate Storm Sewer Systems (MS4s) operator. See Appendix F for a list of permitted MS4s.

If you are located within a CS or MS4, you shall contact the operator at the time of application to determine if submissions are required to the CS or MS4. The operator has discretion to determine if they would like to receive concurrent submissions, and for which documents a concurrent submission is required. The CS or MS4 operator has discretion to modify their policies during the term of the permit by notifying affected permittees.

8 Sector-Specific Requirements for Industrial Activity

8.1 Indicator Monitoring Applicable to Certain Sectors

You must comply with the indicator monitoring requirements below for pH, TSS, COD, and PAHs, see also Part 6.2.1. The requirements apply to only the sectors/subsectors listed in Table 8.1. They are in addition to any sector-specific requirements contained in this Part, requirements applicable to all facilities in Parts 1 through 7, and the appendices of the permit. The indicator monitoring serves as performance indicators of other storm water pollutants and applies to both your primary industrial activity and any co-located industrial activities.

Table 8.1 – Indicator Monitoring		
Subsector	Parameter	Indicator Monitoring Threshold
Subsectors B2, C5, D2, E3, F5, I1, J3, L2, N2, O1, P1, R1, T1, U3, V1, W1, X1, Y2, Z1, AB1, AC1, and AD1	pH	Report Only/ No thresholds or baseline values
	Total Suspended Solids (TSS)	Report Only/ No thresholds or baseline values
	Chemical Oxygen Demand (COD)	Report Only/ No thresholds or baseline values
Sector A facilities that manufacture, use, or store creosote or creosote-treated wood in areas that are exposed to precipitation; and Sectors C (SIC 2911), D, F, H, I, M, O, P (SIC 4011, 4013, and 5171), Q (SIC 4491), R, and S	Polycyclic Aromatic Hydrocarbons (PAHs) ¹	Report Only/ No thresholds or baseline values

¹ Monitoring is required for the 16 individual PAHs identified at Appendix A to 40 CFR Part 423: naphthalene, acenaphthylene, acenaphthene, fluorene, phenanthrene, anthracene, fluoranthene, pyrene, benzo[a]anthracene, chrysene, benzo[b]fluoranthene, benzo[k]fluoranthene, benzo[a]pyrene, benzo[g,h,i]perylene, indeno[1,2,3-c,d]pyrene, and dibenz[a,h]anthracene.

8.2 Sector Specific Requirements

You must comply with Part 8.2 sector-specific requirements associated with your primary industrial activity and any co-located industrial activities, as defined in Appendix B. The sector-specific requirements apply to those areas of your facility where those sector-specific activities occur. These sector-specific requirements are in addition to any requirements specified elsewhere in this permit and are listed below in Parts 8.A - 8.AD.

8.2.1 Hardness-Based Metal Criteria. Some permittees have metal criteria for their sector-specific benchmark monitoring for industrial storm water. The benchmark values of some metals are dependent on water hardness. For these parameters, permittees must determine the hardness of the receiving water (see Appendix E, “Calculating Hardness in Receiving Waters for Hardness Dependent Metals,” for methodology), in accordance with Part 6.2.1.1, to identify the applicable ‘hardness range’ for determining their benchmark value applicable to their facility. The ranges occur in 25 mg/L increments. Hardness Dependent Benchmarks follow in the table below.

Table 8.2-1. Hardness Ranges to Be Used to Determine Benchmark Values for Cadmium, Copper, Lead, Nickel, Silver, and Zinc.						
All Units mg/L	Benchmark Values (mg/L, total)					
	Cadmium	Copper	Lead	Nickel	Silver	Zinc
0-25 mg/L	0.0008	0.002	0.007	0.083	0.0001	0.021
25-50 mg/L	0.0023	0.005	0.022	0.207	0.0007	0.052
50-75 mg/L	0.0038	0.009	0.039	0.317	0.0016	0.079
75-100 mg/L	0.0052	0.012	0.056	0.420	0.0028	0.105
100-125 mg/L	0.0066	0.015	0.074	0.519	0.0043	0.130
125-150 mg/L	0.0081	0.018	0.092	0.615	0.0060	0.154
150-175 mg/L	0.0095	0.021	0.110	0.708	0.0080	0.177
175-200 mg/L	0.0109	0.024	0.128	0.799	0.0102	0.200
200-225 mg/L	0.0123	0.027	0.146	0.888	0.0127	0.222
225-250 mg/L	0.0137	0.030	0.164	0.975	0.0153	0.244
250+ mg/L	0.0151	0.033	0.182	1.061	0.0182	0.266

8.A Sector A – Timber Products

8.A.1 Covered Storm Water Discharges. The requirements in Subpart A apply to storm water discharges associated with industrial activity from Timber Products facilities as identified by the SIC Codes specified under Sector A in Table D-1 of Appendix D of the permit.

8.A.2 Limitation on Coverage.

8.A.2.1 Prohibition of Discharges. (See also Part 1.1.4) Not covered by this permit: storm water discharges from areas where there may be contact with the chemical formulations sprayed to provide surface protection. These discharges must be covered by a separate NPDES permit.

8.A.2.2 Authorized Non-Storm Water Discharges. (See also Part 1.1.3) Also authorized by this permit, provided the non-storm water component of the discharge is in compliance with the requirements in Part 2.1.2: discharges from the spray down of lumber and wood product storage yards where no chemical additives are used in the spray-down waters and no chemicals are applied to wood during storage.

8.A.3 Additional Technology-Based Effluent Limits.

8.A.3.1 Good Housekeeping. (See also Part 2.1.2.2) In areas where storage, loading and unloading, and material handling occur, perform good housekeeping to minimize the discharge of wood debris, leachate generated from decaying wood materials, and the generation of dust.

8.A.4 Additional SWPPP Requirements.

8.A.4.1 Drainage Area Site Map. (See also Part 5.1.2) Document in your SWPPP where any of the following may be exposed to precipitation or surface runoff: processing areas, treatment chemical storage areas, treated wood and residue storage areas, wet decking areas, dry decking areas, untreated wood and residue storage areas, and treatment equipment storage areas.

8.A.4.2 Inventory of Exposed Materials. (See also Part 5.1.3.2) Where such information exists, if your facility has used chlorophenolic, creosote, or chromium-copper-arsenic formulations for wood surface protection or preserving, document in your SWPPP the following: areas where contaminated soils, treatment equipment, and stored materials still remain, and the management practices employed to minimize the contact of these materials with storm water runoff.

8.A.4.3 Description of Storm water Management Controls. (See also Part 5.1.4) Document measures implemented to address the following activities and sources: log, lumber, and wood product storage areas; residue storage areas; loading and unloading areas; material handling areas; chemical storage areas; and equipment and vehicle maintenance, storage, and repair areas. If your facility performs wood surface protection and preservation activities, address the specific control measures, including any best management practices (BMPs), for these activities.

8.A.5 Additional Inspection Requirements. (See also Part 4.1) If your facility performs wood surface protection and preservation activities, inspect processing areas, transport areas, and treated wood storage areas monthly to assess the usefulness of practices to minimize the deposit of treatment chemicals on unprotected soils and in areas that will come in contact with storm water discharges.

8.A.6 Sector-Specific Benchmarks. (See also Part 6) Table 8.A-1 identifies benchmarks that apply to the specific subsectors of Sector A. These benchmarks apply to both your primary industrial activity and any co-located industrial activities.

Table 8.A-1		
Subsector (You may be subject to requirements for more than one sector/subsector)	Parameter	Benchmark Monitoring Concentration
Subsector A1. General Sawmills and Planing Mills (SIC 2421)	Chemical Oxygen Demand (COD)	120.0 mg/L
	Total Suspended Solids (TSS)	100 mg/L
	Total Zinc ¹	Hardness Dependent
Subsector A2. Wood Preserving (SIC 2491)	Total Arsenic	0.34 mg/L
	Total Copper	Hardness Dependent
Subsector A3. Log Storage and Handling (SIC 2411)	Total Suspended Solids (TSS)	100 mg/L
Subsector A4. Hardwood Dimension and Flooring Mills; Special Products Sawmills, not elsewhere classified; Millwork, Veneer, Plywood, and Structural Wood; Wood Pallets and Skids; Wood Containers, not elsewhere classified; Wood Buildings and Mobile Homes; Reconstituted Wood Products; and Wood Products Facilities not elsewhere classified (SIC 2426, 2429, 2431-2439 (except 2434), 2441, 2448, 2449, 2451, 2452, 2493, and 2499)	Chemical Oxygen Demand (COD)	120.0 mg/L
	Total Suspended Solids (TSS)	100.0 mg/L

¹ The benchmark values of some metals are dependent on water hardness. For these parameters, permittees must determine the hardness of the receiving water (see Appendix E, “Calculating Hardness in Receiving Waters for Hardness Dependent Metals,” for methodology), in accordance with Part 6.2.1.1, to identify the applicable ‘hardness range’ for determining their benchmark value applicable to their facility. The ranges occur in 25 mg/L increments. Hardness Dependent Hardness-based benchmarks follow Table 8.2-1 and the requirements in Appendix E.

8.A.7 Effluent Limitations Based on Effluent Limitations Guidelines. (See also 6.2.3) Table 8.A-2 identifies effluent limits that apply to the industrial activities described below. Compliance with these effluent limits is to be determined based on discharges from these industrial activities independent of commingling with any other waste streams that may be covered under this permit.

Table 8.A-2		
Industrial Activity	Parameter	Effluent Limitation
Discharges resulting from spray down or intentional wetting of logs at wet deck storage areas	pH	6.0 - 9.0 S.U.
	Debris (woody material such as bark, twigs, branches, heartwood, or sapwood)	No discharge of debris that will not pass through a 2.54-cm (1-in.) diameter round

8.B Sector B – Paper and Allied Products

8.B.1 Covered Storm Water Discharges. The requirements in Subpart B apply to storm water discharges associated with industrial activity from Paper and Allied Products Manufacturing facilities, as identified by the SIC Codes specified under Sector B in Table D-1 of Appendix D of the permit.

8.B.2 Sector-Specific Benchmarks. (See also Part 6)

Table 8.B-1		
Subsector (You may be subject to requirements for more than one sector/subsector)	Parameter	Benchmark Monitoring Concentration
Subsector B1. Paperboard Mills (SIC Code 2631)	Chemical Oxygen Demand (COD)	120.0 mg/L

8.C Sector C – Chemical and Allied Products Manufacturing, and Refining

8.C.1 Covered Storm Water Discharges. The requirements in Subpart C apply to storm water discharges associated with industrial activity from Chemical and Allied Products Manufacturing, and Refining facilities, as identified by the SIC Codes specified under Sector C in Table D-1 of Appendix D of the permit.

8.C.2 Limitations on Coverage.

8.C.2.1 Prohibition of Non-Storm Water Discharges. (See also Part 1.1.4) The following are not covered by this permit: non-storm water discharges containing inks, paints, or substances (hazardous, nonhazardous, etc.) resulting from an onsite spill, including materials collected in drip pans; wash water from material handling and processing areas; and wash water from drum, tank, or container rinsing and cleaning.

8.C.3 Sector-Specific Benchmarks. (See also Part 6) Table 8.C-1 identifies benchmarks that apply to the specific subsectors of Sector C. These benchmarks apply to both your primary industrial activity and any co-located industrial activities.

Subsector (You may be subject to requirements for more than one sector/subsector)	Parameter	Benchmark Monitoring Concentration
Subsector C1. Agricultural Chemicals (SIC 2873-2879)	Nitrate plus Nitrite Nitrogen	0.68 mg/L
	Total Lead ¹	Hardness Dependent
	Total Zinc ¹	Hardness Dependent
	Total Phosphorus	2.0 mg/L
Subsector C2. Industrial Inorganic Chemicals (SIC 2812-2819)	Total Aluminum	0.75 mg/L
	Nitrate plus Nitrite Nitrogen	0.68 mg/L
Subsector C3. Soaps, Detergents, Cosmetics, and Perfumes (SIC 2841-2844)	Nitrate plus Nitrite Nitrogen	0.68 mg/L
	Total Zinc ¹	Hardness Dependent
Subsector C4. Plastics, Synthetics, and Resins (SIC 2821-2824)	Total Zinc ¹	Hardness Dependent

¹ The benchmark values of some metals are dependent on water hardness. For these parameters, permittees must determine the hardness of the receiving water (see Appendix E, “Calculating Hardness in Receiving Waters for Hardness Dependent Metals,” for methodology), in accordance with Part 6.2.1.1, to identify the applicable ‘hardness range’ for determining their benchmark value applicable to their facility. The ranges occur in 25 mg/L increments. Hardness Dependent Hardness-based benchmarks follow Table 8.2-1 and the requirements in Appendix E.

8.C.4 Effluent Limitations Based on Effluent Limitations Guidelines. (See also 6.2.3) Table 8.C-2 identifies effluent limits that apply to the industrial activities described below. Compliance with these effluent limits is to be determined based on discharges from these industrial activities independent of commingling with any other waste streams that may be covered under this permit.

Table 8.C-2		
Industrial Activity	Parameter	Effluent Limitation
Runoff from phosphate fertilizer manufacturing facilities that comes into contact with any raw materials, finished product, by-products or waste products (SIC 2874)	Total Phosphorus	105.0 mg/L, daily maximum
		35.0 mg/L, monthly average
	Fluoride	75.0 mg/L, daily maximum
		25.0 mg/L, monthly average

8.D Sector D – Asphalt Paving and Roofing Materials and Lubricant Manufacturing

8.D.1 Covered Storm water Discharges. The requirements in Subpart D apply to storm water discharges associated with industrial activity from Asphalt Paving and Roofing Materials and Lubricant Manufacturing facilities, as identified by the SIC Codes specified under Sector D in Table D-1 of Appendix D of the permit. See Part 1.8 for information regarding portable facilities.

8.D.2 Limitations on Coverage. The following storm water discharges associated with industrial activity are not authorized by this permit (See also Part 1.1.4)

8.D.2.1 Discharges from petroleum refining facilities, including those that manufacture asphalt or asphalt products, that are subject to nationally established effluent limitation guidelines found in 40 CFR Part 419 (Petroleum Refining); or

8.D.2.2 Discharges from oil recycling facilities, which are covered under Sector N (see Part 8.N); or

8.D.2.3 Discharges associated with fats and oils rendering, which are covered under Sector U (see Part 8.U).

8.D.3 Sector-Specific Benchmarks. (See also Part 6) Table 8.D-1 identifies benchmarks that apply to the specific subsectors of Sector D. These benchmarks apply to both your primary industrial activity and any co-located industrial activities.

Table 8.D-1.		
Subsector (You may be subject to requirements for more than one sector/subsector)	Parameter	Benchmark Monitoring Concentration
Subsector D1. Asphalt Paving and Roofing Materials (SIC 2951, 2952)	Total Suspended Solids (TSS)	100 mg/L

8.D.4 Effluent Limitations Based on Effluent Limitations Guidelines. (See also 6.2.3) Table 8.D-2 identifies effluent limitations that apply to the industrial activities described below. Compliance with these effluent limitations is to be determined based on discharges from these industrial activities independent of commingling with any other waste streams that may be covered under this permit.

Table 8.D-2		
Industrial Activity	Parameter	Effluent Limitation
Discharges from asphalt emulsion facilities	Total Suspended Solids (TSS)	23 mg/L, daily maximum
		15 mg/L, monthly average
	pH	6.0 – 9.0 S.U.
	Oil and Grease	15.0 mg/L, daily maximum
10.0 mg/L, monthly average		

8.E Sector E – Glass, Clay, Cement, Concrete, and Gypsum Products

8.E.1 Covered Storm Water Discharges. The requirements in Subpart E apply to storm water discharges associated with industrial activity from Glass, Clay, Cement, Concrete, and Gypsum Products facilities, as identified by the SIC Codes specified under Sector E in Table D-1 of Appendix D of the permit. See Part 1.8 for information regarding portable facilities.

8.E.2 Additional Technology-Based Effluent Limits.

8.E.2.1 Good Housekeeping Measures. (See also Part 2.1.2.2) With good housekeeping, prevent or minimize the discharge of spilled cement, aggregate (including sand or gravel), kiln dust, fly ash, settled dust, or other significant material in storm water from paved portions of the site that are exposed to storm water. Sweep or vacuum paved surfaces that are exposed to storm water regularly or use other equivalent measures (e.g., wash down the area and collect and/or treat and properly dispose of the washdown water) to minimize the potential discharge of these materials in storm water. Indicate in your SWPPP the frequency of sweeping, vacuuming, or equivalent measures. Determine the frequency based on the amount of industrial activity occurring in the area and the frequency of precipitation, but it must be performed at least once a week in areas where cement, aggregate, kiln dust, fly ash, or settled dust are being handled or processed and may be discharged in storm water. You must also prevent the exposure of fine granular solids (e.g., cement, fly ash, kiln dust) to storm water, where practicable, by storing these materials in enclosed silos, hoppers, buildings, or under other covering.

8.E.3 Additional SWPPP Requirements.

8.E.3.1 Drainage Area Site Map. (See also Part 5.1.2) Document in the SWPPP the locations of the following, as applicable: bag house or other dust control device; recycle/sedimentation pond, clarifier, or other device used for the treatment of process wastewater; and the areas that drain to the treatment device.

8.E.3.2 Certification. (See also Part 5.1.3.4) For facilities producing ready-mix concrete, concrete block, brick, or similar products, include in the non-storm water discharge certification a description of measures that ensure that process waste waters resulting from washing trucks, mixers, transport buckets, forms, or other equipment are discharged in accordance with NPDES requirements or are recycled.

8.E.4 Sector-Specific Benchmarks. (See also Part 6) Table 8.E-1 identifies benchmarks that apply to the specific subsectors of Sector E. These benchmarks apply to both your primary industrial activity and any co-located industrial activities, which describe your site activities.

Table 8.E-1		
Subsector (You may be subject to requirements for more than one sector/subsector)	Parameter	Benchmark Monitoring Concentration
Subsector E1. Clay Product Manufacturers (SIC 3251-3259, 3261-3269)	Total Aluminum	0.75 mg/L
Subsector E2. Concrete and Gypsum Product Manufacturers (SIC 3271-3275)	Total Suspended Solids (TSS)	100 mg/L

8.E.5 Effluent Limitations Based on Effluent Limitations Guidelines. (See also 6.2.3) Table 8.E-2 identifies effluent limitations that apply to the industrial activities described below. Compliance with these effluent limitations is to be determined based on discharges from these industrial activities independent of commingling with any other waste streams that may be covered under this permit.

Table 8.E-2		
Industrial Activity	Parameter	Effluent Limitation
Discharges from material storage piles at cement manufacturing facilities (SIC 3241)	Total Suspended Solids (TSS)	50.0 mg/L, daily maximum ¹
	pH	6.0 – 9.0 S.U. ¹

¹ Any untreated overflow from facilities designed, constructed and operated to treat the volume of storm water from materials storage piles which is associated with a 10-year, 24-hour rainfall event shall not be subject to the pH and TSS limitations (40 CFR Part 411.32(b)).

8.F Sector F – Primary Metals

8.F.1 Covered Storm Water Discharges. The requirements in Subpart F apply to storm water discharges associated with industrial activity from Primary Metals facilities, as identified by the SIC Codes specified under Sector F in Table D-1 of Appendix D of the permit.

8.F.2 Additional Technology-Based Effluent Limits.

8.F.2.1 Good Housekeeping Measures. (See also Part 2.1.2.2) As part of your good housekeeping program, include a cleaning and maintenance program for all impervious areas of the facility where particulate matter, dust, or debris may accumulate to minimize the discharge of pollutants in storm water. The cleaning and maintenance program must encompass, as appropriate, areas where material loading and unloading, storage, handling, and processing occur, and, where practicable, the paving of areas where vehicle traffic or material storage occur that are exposed to storm water. Regularly sweep, vacuum, or use other equivalent measures (e.g., wash down the area and collect and/or treat and properly dispose of the washdown water) paved surfaces. For unstabilized areas or for stabilized areas where sweeping, vacuuming, or washing down is not possible, to minimize the discharge pollutants in storm water implement storm water management devices such as the following, where feasible (list not exclusive): sediment traps, vegetative buffer strips, filter fabric fence, sediment filtering boom, gravel outlet protection, or other equivalent measures that effectively trap or remove sediment.

8.F.3 Additional SWPPP Requirements.

8.F.3.1 Drainage Area Site Map. (See also Part 5.1.2) Identify in the SWPPP where any of the following activities may be exposed to precipitation or surface runoff: storage or disposal of wastes such as spent solvents and baths, sand, slag and dross; liquid storage tanks and drums; processing areas including pollution control equipment (e.g., baghouses); and storage areas of raw material such as coal, coke, scrap, sand, fluxes, refractories, or metal in any form. In addition, indicate where an accumulation of significant amounts of particulate matter could occur from such sources as furnace or oven emissions, losses from coal and coke handling operations, etc., and could result in a discharge of pollutants in storm water.

8.F.3.2 Inventory of Exposed Material. (See also Part 5.1.3.2) Include in the inventory of materials handled at the site that potentially may be exposed to precipitation or runoff, areas where deposition of particulate matter from process air emissions or losses during material-handling activities are possible

8.F.4 Additional Inspection Requirements. (See also Part 4.1) As part of conducting your quarterly routine facility inspections (Part 4.1), address all potential sources of pollutants, including (if applicable) air pollution control equipment (e.g., baghouses, electrostatic precipitators, scrubbers, and cyclones), for any signs of degradation (e.g., leaks, corrosion, or improper operation) that could limit their efficiency and lead to excessive emissions. Consider monitoring air flow at inlets and outlets (or use equivalent measures) to check for leaks (e.g., particulate deposition) or blockage in ducts. Also inspect all process and material handling equipment (e.g., conveyors, cranes, and vehicles) for leaks, drips, or the potential loss of material; and material storage areas (e.g., piles, bins, or hoppers for storing coke, coal, scrap, or slag, as well as chemicals stored in tanks and drums) for signs of material losses due to wind or storm water runoff.

8.F.5 Sector-Specific Benchmarks. (See also Part 6) Table 8.F-1 identifies benchmarks that apply to the specific subsectors of Sector F. These benchmarks apply to both your primary industrial activity and any co-located industrial activities, which describe your site activities.

Table 8.F-1		
Subsector (You may be subject to requirements for more than one sector/subsector)	Parameter	Benchmark Monitoring Concentration
Subsector F1. Steel Works, Blast Furnaces, and Rolling and Finishing Mills (SIC 3312-3317)	Total Aluminum	0.75 mg/L
	Total Zinc ¹	Hardness Dependent
Subsector F2. Iron and Steel Foundries (SIC 3321-3325)	Total Aluminum	0.75 mg/L
	Total Suspended Solids (TSS)	100 mg/L
	Total Copper	Hardness Dependent
	Total Zinc ¹	Hardness Dependent
Subsector F3. Rolling, Drawing, and Extruding of Nonferrous Metals (SIC 3351-3357)	Total Copper	Hardness Dependent
	Total Zinc ¹	Hardness Dependent
Subsector F4. Nonferrous Foundries (SIC 3363-3369)	Total Copper	Hardness Dependent
	Total Zinc ¹	Hardness Dependent

¹ The benchmark values of some metals are dependent on water hardness. For these parameters, permittees must determine the hardness of the receiving water (see Appendix E, “Calculating Hardness in Receiving Waters for Hardness Dependent Metals,” for methodology), in accordance with Part 6.2.1.1, to identify the applicable ‘hardness range’ for determining their benchmark value applicable to their facility. The ranges occur in 25 mg/L increments. Hardness Dependent Hardness-based benchmarks follow Table 8.2-1 and the requirements in Appendix E.

8.G Sector G – Metal Mining

Note: Where compliance with a requirement in a separate exploration permit, mining permit, reclamation plan, Surface Mining Control and Reclamation Act (SMCRA) requirements, etc. will result in you fully meeting any requirement in this Subpart, you are considered to have complied with the relevant requirement in this Subpart. You must include documentation in your SWPPP describing your rationale for concluding that any particular action on your part is sufficient to comply with the corresponding requirement in this Subpart.

8.G.1 Covered Storm Water Discharges. The requirements in Subpart G apply to storm water discharges associated with industrial activity from Metal Mining facilities as identified by the SIC Codes specified under Sector G in Table D-1 of Appendix D. Coverage is required for metal mining facilities that discharge storm water contaminated by contact with, or that has come into contact with, any overburden, raw material, intermediate product, finished product, byproduct, or waste product located on the site of the operation.

8.G.1.1 Covered Discharges from Inactive Facilities. All storm water discharges.

8.G.1.2 Covered Discharges from Active and Temporarily Inactive Facilities. Only the storm water discharges from the following areas are covered:

- Waste rock and overburden piles if composed entirely of storm water and not combining with mine drainage;
- Topsoil piles;
- Offsite haul and access roads;
- Onsite haul and access roads constructed of waste rock, overburden, or spent ore if composed entirely of storm water and not combining with mine drainage;
- Onsite haul and access roads not constructed of waste rock, overburden, or spent ore except if mine drainage is used for dust control;
- Runoff from tailings dams or dikes when not constructed of waste rock or tailings and no process fluids are present;
- Runoff from tailings dams or dikes when constructed of waste rock or tailings and no process fluids are present, if composed entirely of storm water and not combining with mine drainage;
- Concentration building if no contact with material piles;
- Mill site if no contact with material piles;
- Office or administrative building and housing if mixed with storm water from industrial area;
- Chemical storage area;
- Docking facility if no excessive contact with waste product that would otherwise constitute mine drainage;
- Explosive storage;
- Fuel storage;
- Vehicle and equipment maintenance area and building;
- Parking areas (if necessary);
- Power plant;
- Unreclaimed, disturbed areas outside of active mining area;
- Reclaimed areas released from reclamation requirements; and
- Partially or inadequately reclaimed areas or areas not released from reclamation requirements.

8.G.1.3 Covered Discharges from Earth-Disturbing Activities Prior to Active Mining Activities. All storm water discharges.

8.G.1.4 Covered Discharges from Facilities Undergoing Reclamation. All storm water discharges.

8.G.2 Limitations on Coverage.

8.G.2.1 Prohibition of Storm Water Discharges. Storm water discharges not authorized by this permit: discharges from active metal mining facilities that are subject to effluent limitation guidelines for the Ore Mining and Dressing Point Source Category at NDEE Title 119, Chapter 27, Part 007.38 (see 40 CFR Part 440).

NOTE: Storm water runoff from these sources is subject to NDEE Title 119, Chapter 27, Part 007.38 if they are mixed with other discharges subject to this part. In this case, they are not eligible for coverage under this permit. Discharges from overburden/waste rock and overburden/waste rock-related areas are not subject to NDEE Title 119, Chapter 27, Part 007.38 unless they: (1) drain naturally (or are intentionally diverted) to a point source; and (2) combine with "mine drainage" that is otherwise regulated under the Part 007.38 regulations. For such sources, coverage under this permit would be available if the discharge composed entirely of storm water does not combine with other sources of mine drainage that are not subject to NDEE Title 119, Chapter 27, Part 007.38, and meets the other eligibility criteria contained in Part 1.1 of the permit. Operators bear the initial responsibility for determining if they are eligible for coverage under this permit, or must seek coverage under another NPDES permit.

8.G.2.2 Prohibition of Non-Storm Water Discharges. Not authorized by this permit: adit drainage, and contaminated springs or seeps discharging from waste rock dumps that do not directly result from precipitation events (see also the standard Limitations on Coverage in Part 1.1.4).

8.G.2.3 Authorized Non-Storm Water Discharges (See also Part 1.1.3) The following non-storm water discharges are only authorized for earth-disturbing activities conducted prior to active mining activities, as defined in Part 8.G.3.1, provided that, with the exception of water used to control dust, these discharges are not routed to areas of exposed soil and all discharges comply with the permit's effluent limits. Once the earth-disturbing activities conducted prior to active mining activities have ceased, the only authorized non-storm water discharges for Sector G are: water used to wash vehicles and equipment, provided that there is no discharge of soaps, solvents, or detergents used for such purposes; and water used to control dust.

8.G.3 Definitions. The following definitions are not intended to supersede the definitions of active and inactive mining facilities established by 40 CFR Part 122.26(b)(14)(iii).

8.G.3.1 Mining operation – For the permit, mining operations are grouped into two distinct categories, with distinct effluent limits and requirements applicable to each: a) earth-disturbing activities (i.e., exploration, clearing, grading, excavation, and construction) conducted prior to active mining activities; and b) active mining activities, which includes reclamation. "Mining operations" can occur at both inactive mining facilities and temporarily inactive mining facilities.

8.G.3.2 Exploration phase - Entails earth-disturbing activities conducted prior to active mining activities. This includes exploration and land disturbance activities to determine the viability of a site and activities performed for purposes of mine site preparation where active mining has not yet commenced (e.g., for heap leach pads, waste rock facilities, tailings impoundments, wastewater treatment plants).

8.G.3.3 Construction phase – Consists of the construction of staging areas for structure construction such as to house project personnel and equipment, mill buildings, etc., and the building of site access roads.

8.G.3.4 Active mining phase - Activities including the extraction, removal or recovery, and beneficiation of metal ore. Includes the removal of overburden and waste rock to expose mineable

minerals. All such activities occur within the “active mining area” as defined at 40 CFR Part 440.132(a), a place where work or other activity related to the extraction, removal or recovery of metal ore is being conducted, except, with respect to surface mines, any area of land on or in which grading has been completed to return the earth to desired contour and reclamation work has begun.

8.G.3.5 Reclamation phase - Activities undertaken, in compliance with applicable mined land reclamation requirements, to return the land to an appropriate post-mining contour and land use in order to meet applicable Federal, State, and local reclamation requirements. The reclamation phase is considered part of the active mining activities.

A site or portion of a site is considered to have been reclaimed if storm water runoff that comes into contact with: 1) raw materials, intermediate byproducts, finished products, and waste products does not have the potential to cause or contribute to violations of state water quality standards; (2) soil disturbing activities related to mining at the sites or portion of the site have been completed; (3) the site or portion of the site has been stabilized to minimize soil erosion; and (4) as appropriate depending on location, size, and the potential to contribute pollutants to storm water discharges, the site or portion of the site has been revegetated, will be amenable to natural revegetation, or will be left in a condition consistent with the post-mining land use.

8.G.3.6 Active metal mining facility - A place where work or other activity related to the extraction, removal, or recovery of metal ore is being conducted. For surface mines, this definition does not include any land where grading has returned the earth to a desired contour and reclamation has begun. This definition is derived from the definition of “active mining area” found at 40 CFR Part 440.132(a).

8.G.3.7 Inactive metal mining facility - A site or portion of a site where metal mining and/or milling occurred in the past but is not an active facility as defined above, and where the inactive portion is not covered by an active mining permit issued by the applicable Federal, State, or local agency. An inactive metal mining facility has an identifiable owner / operator. Sites where mining claims are being maintained prior to disturbances associated with the extraction, beneficiation, or processing of mined materials and sites where minimal activities are undertaken for the sole purpose of maintaining a mining claim are not considered either active or inactive mining facilities and do not require an NPDES industrial storm water permit.

8.G.3.8 Temporarily inactive metal mining facility - A site or portion of a site where metal mining and/or milling occurred in the past but currently are not being actively undertaken, and the facility is covered by an active mining permit issued by the applicable Federal, State, or local agency.

8.G.3.9 Final Stabilization - A site or portion of a site is “finally stabilized” when it has implemented all applicable Federal, State, and local reclamation requirements and the site has been returned to a beneficial use.

8.G.4 Technology-Based Effluent Limits Applicable to All Earth-Disturbing Activities Conducted Prior to Active Mining Activities. Clearing, grading, and excavation activities being conducted as part of the exploration and construction phase of mining activities are covered under this permit.

8.G.4.1 Management Practices for Earth-Disturbing Activities.

8.G.4.1.1 Selecting and installing control measures. For all areas affected by clearing, grading, and excavation activities, you must select, design, install, and implement control measures that meet applicable Part 2 effluent limits.

8.G.4.1.2 Good Housekeeping. Litter, debris, and chemicals must be prevented from becoming a pollutant source in storm water discharges.

8.G.4.1.3 Retention and Detention of Storm water Runoff. For drainage locations serving more than one acre, sediment basins and/or temporary sediment traps should be used. At a minimum, silt fences, vegetative buffer strips, or equivalent sediment controls are required for all down slope boundaries (and for side slope boundaries as necessary based on individual site conditions) of the development area unless a sediment basin providing storage for a calculated volume of runoff from a 2-year, 24-hour storm or 3,600 cubic feet of storage per acre drained is provided. You are required to remove sediment from sediment traps or sedimentation ponds when design capacity has been reduced by 50 percent. Due to high sediment discharges from some Sector G facilities, permittees may need to implement a combination of structural BMP approaches to sufficiently decrease discharge of sediment from their facilities.

8.G.4.2 Inspection of Earth-Disturbing Activities.

8.G.4.2.1 Inspection Frequency. Inspections must be conducted at least once every 14 calendar days and within 24 hours of the end of a storm event of 0.5 inches or greater. Inspection frequency may be reduced to at least once every month if the entire site is temporarily stabilized (pursuant to Part 8.G.4.3.2), if runoff is unlikely due to winter conditions (e.g., site is covered with snow, ice, or the ground is frozen), or construction is occurring during seasonal dry periods in semi-arid areas. Reduced inspection frequency does not relieve the permittee of the maintenance responsibilities during interim periods.

8.G.4.2.2 Location of Inspections. Inspections must include all areas of the site disturbed by clearing, grading, and/or excavation activities and areas used for storage of materials that are exposed to precipitation. Sedimentation and erosion control measures must be observed to ensure proper operation. Discharge locations must be inspected to ascertain whether erosion control measures are effective in preventing significant impacts to waters of the state, where accessible. Where discharge locations are inaccessible, nearby downstream locations must be inspected to the extent that such inspections are practicable. Locations where vehicles enter or exit the site must be inspected for evidence of significant off-site sediment tracking.

8.G.4.2.3 Inspection Reports. For each inspection required above, you must complete an inspection report. At a minimum, the inspection report must include the information required in Part 4.1.

8.G.4.3 Requirements for Cessation of Earth-Disturbing Activities.

8.G.4.3.1 Inspections and Maintenance. Inspections and maintenance of control measures, including BMPs, associated with clearing, grading, and excavation activities being conducted as part of the exploration and construction phase of a mining operation must continue until final stabilization has been achieved on all portions of the disturbed area, or until the commencement of the active mining phase for those areas that have been temporarily stabilized as a precursor to mining.

8.G.4.3.2 Temporary Stabilization of Disturbed Areas. Stabilization measures should be initiated immediately in portions of the site where clearing, grading and/or excavation activities have temporarily ceased, but in no case more than 14 days after the clearing, grading and/or excavation activities in that portion of the site have temporarily ceased. In semi-arid, and drought-stricken areas, or where initiating perennial vegetative stabilization measures is not possible within 14 days after mining, exploration, and/or construction activity has temporarily ceased due to winter conditions (e.g., site is covered with snow, ice, or the ground is frozen), temporary vegetative stabilization measures must be initiated as soon as practicable. Until temporary vegetative stabilization is achieved, interim measures such as erosion control blankets with an appropriate seed base and tackifiers must be employed. In areas of the site, where exploration and/or

construction has permanently ceased prior to active mining, temporary stabilization measures must be implemented to minimize mobilization of sediment or other pollutants until such time as the active mining phase commences.

8.G.4.3.3 Final Stabilization of Disturbed Areas. Stabilization measures should be initiated immediately in portions of the site where exploration and/or construction activities have permanently ceased, but in no case more than 14 days after the exploration and/or construction activity in that portion of the site has permanently ceased. In semi-arid, and drought-stricken areas, or where initiating perennial vegetative stabilization measures is not possible within 14 days after mining, exploration, and/or construction activity has permanently ceased due to winter conditions (e.g., site is covered with snow, ice, or the ground is frozen), final vegetative stabilization measures must be initiated as soon as possible. Until final stabilization is achieved temporary stabilization measures, such as erosion control blankets with an appropriate seed base and tackifiers, must be used.

8.G.5 Technology-Based Effluent Limits for Active Mining Activities.

8.G.5.1 Employee Training. (See also Part 2.1.2.9) Conduct employee training at least annually at active and temporarily inactive sites.

8.G.5.2 Storm Water Controls. Apart from the control measures you implement to meet your Part 2 technology-based effluent limits, where necessary to minimize pollutant discharges in storm water, implement the following control measures at your site. The potential pollutants identified in Part 8.G.6.3 shall determine the priority and appropriateness of the control measures selected. For mines subject to dust control requirements under state or county air quality permits, provided the requirements are equivalent, compliance with such air permit dust requirements shall constitute compliance with the dust control effluent limit in Part 2.1.2.11.

Storm Water Diversions: Divert storm water away from potential pollutant sources through the implementation of control measures such as the following, where determined feasible (list not exclusive): interceptor or diversion controls (e.g., dikes, swales, curbs, or berms); pipe slope drains; subsurface drains; conveyance systems (e.g., channels or gutters, open-top box culverts, and waterbars; rolling dips and road sloping; roadway surface water deflector and culverts); or their equivalents.

Capping: When capping is necessary to minimize pollutant discharges in storm water, identify the source being capped and the material used to construct the cap.

Treatment: If treatment of storm water (e.g., chemical or physical systems, oil and water separators, artificial wetlands) is necessary to protect water quality, describe the type and location of treatment used. Passive and/or active treatment of storm water runoff is encouraged where feasible. Treated storm water may be discharged as a storm water source regulated under this permit provided the discharge is not combined with discharges subject to effluent limitation guidelines for the Ore Mining and Dressing Point Source Category (see 40 CFR Part 440).

8.G.5.3 Certification of Discharge Testing. (See also Part 5.1.3.4) Test or evaluate all outfalls covered under this permit for the presence of specific mining-related but unauthorized non-storm water discharges such as seeps or adit discharges, or discharges subject to effluent limitations guidelines (e.g., 40 CFR Part 440), such as mine drainage or process water. Alternately, if applicable, keep a certification with your SWPPP consistent with Part 8.G.6.6.

8.G.6 Additional SWPPP Requirements.

Note: The requirements in Part 8.G.6 are not applicable to inactive metal mining facilities.

8.G.6.1 Nature of Industrial Activities. (See also Part 5.1.2) Briefly document in your SWPPP the mining and associated activities that can potentially affect the storm water discharges covered

by this permit, including a general description of the location of the site relative to major transportation routes and communities.

8.G.6.2 Site Map. (See also Part 5.1.2) Document in your SWPPP the locations of the following (as appropriate): mining or milling site boundaries; access and haul roads; outline of the drainage areas of each storm water outfall within the facility with indications of the types of discharges from the drainage areas; location(s) of all permitted discharges covered under an individual NPDES permit; outdoor equipment storage, fueling, and maintenance areas; materials handling areas; outdoor manufacturing, outdoor storage, and material disposal areas; outdoor chemicals and explosives storage areas; overburden, materials, soils, or waste storage areas; location of mine drainage (where water leaves mine) or other process water; tailings piles and ponds (including proposed ones); heap leach pads; off-site points of discharge for mine drainage and process water; surface waters; boundary of tributary areas that are subject to effluent limitations guidelines; and location(s) of reclaimed areas.

8.G.6.3 Potential Pollutant Sources. (See also Part 5.1.3) For each area of the mine or mill site where storm water discharges associated with industrial activities occur, identify the types of pollutants (e.g., heavy metals, sediment) likely to be present in significant amounts. Consider these factors: the mineralogy of the ore and waste rock (e.g., acid forming); toxicity and quantity of chemicals used, produced, or discharged; the likelihood of contact with storm water; vegetation of site (if any); and history of significant leaks or spills of toxic or hazardous pollutants. Also include a summary of any existing ore or waste rock or overburden characterization data and test results for potential generation of acid rock. If any new data is acquired due to changes in ore type being mined, update your SWPPP with this information.

8.G.6.4 Documentation of Control Measures. Document all control measures that you implement consistent with Part 8.G.5.2. If control measures are implemented or planned but are not listed in Part 8.G.5.2 (e.g., substituting a less toxic chemical for a more toxic one), include descriptions of them in your SWPPP.

8.G.6.5 Employee Training. All employee training(s) must be documented in the SWPPP.

8.G.6.6 Certification of Permit Coverage for Commingled Non-Storm Water Discharges: If you are able, consistent with Part 8.G.5.3 above, to certify that a particular discharge composed of commingled storm water and non-storm water is covered under a separate NPDES permit, and that permit subjects the non-storm water portion to effluent limitations prior to any commingling, retain such certification with your SWPPP. This certification must identify the non-storm water discharges, the applicable NPDES permit(s), the effluent limitations placed on the non-storm water discharge by the permit(s), and the points at which the limitations are applied.

8.G.7 Additional Inspection Requirements. (See also Part 4.1 and 8.G.4.2) Except for areas of the site subject to clearing, grading, and/or excavation activities conducted as part of the exploration and construction phase, which are subject to Part 8.G.4.2.1, inspect sites at least quarterly unless adverse weather conditions make the site inaccessible. Sites which discharge to waters designated as State Resource Waters, Class A must be inspected monthly. See Part 8.G.8.4 for inspection requirements for inactive and unstaffed sites.

8.G.8 Monitoring and Reporting Requirements. (See also Part 6)

Note: There are no Part 8.G.8 monitoring and reporting requirements for inactive and unstaffed sites.

8.G.8.1 Benchmark Monitoring for Active Copper Ore Mining and Dressing Facilities. Table 8.G-1 identifies benchmarks that apply to active copper ore mining and dressing facilities. These benchmarks apply to both your primary industrial activity and any co- located industrial activities.

Table 8.G-1		
Subsector (You may be subject to requirements for more than one sector/subsector)	Parameter	Benchmark Monitoring Concentration
Subsector G1. Active Copper Ore Mining and Dressing Facilities (SIC 1021)	Total Suspended Solids (TSS)	100 mg/L
	Nitrate plus Nitrite Nitrogen	0.68 mg/L
	Chemical Oxygen Demand (COD)	120 mg/L

8.G.8.2 Benchmark Monitoring Requirements for Discharges from Waste Rock and Overburden Piles at Active Metal Mining Facilities. For discharges from waste rock and overburden piles, perform benchmark monitoring once in the first year for the parameters listed in Table 8.G-2, and twice annually in all subsequent years of coverage under this permit for any parameters for which the benchmark has been exceeded. You are also required to conduct analytic monitoring for the parameters listed in Table 8.G-3 in accordance with the requirements in Part 8.G.8.3. The Director may also notify you that you must perform additional monitoring to accurately characterize the quality and quantity of pollutants discharged from your waste rock and overburden piles.

Table 8.G-2		
Subsector (You may be subject to requirements for more than one sector/subsector)	Parameter	Benchmark Monitoring Concentration
Subsector G2. Iron Ores; Copper Ores; Lead and Zinc Ores; Gold and Silver Ores; Ferroalloy Ores, Except Vanadium; and Miscellaneous Metal Ores (SIC Codes 1011, 1021, 1031, 1041, 1044, 1061, 1081, 1094, 1099) (Note: when analyzing hardness for a suite of metals, it is more cost effective to add analysis of calcium and magnesium, and have hardness calculated than to require hardness analysis separately)	Total Suspended Solids (TSS)	100 mg/L
	Turbidity	50 NTU
	pH	6.0 - 9.0 S.U.
	Hardness (as CaCO ₃ ; calc. from Ca, Mg) ¹	no benchmark value
	Total Antimony	0.088 mg/L
	Total Arsenic	0.34 mg/L
	Total Beryllium	0.13 mg/L
	Total Cadmium ¹	Hardness Dependent
	Total Copper	Hardness Dependent
	Total Lead ¹	Hardness Dependent
	Total Mercury	0.0014 mg/L
Total Nickel ¹	Hardness Dependent	

Table continued on next page.

Subsector (You may be subject to requirements for more than one sector/subsector)	Parameter	Benchmark Monitoring Concentration
	Total Selenium	0.0031 mg/L
	Total Silver ¹	Hardness Dependent
	Total Zinc ¹	Hardness Dependent

¹ The benchmark values of some metals are dependent on water hardness. For these parameters, permittees must determine the hardness of the receiving water (see Appendix E, “Calculating Hardness in Receiving Waters for Hardness Dependent Metals,” for methodology), in accordance with Part 6.2.1.1, to identify the applicable ‘hardness range’ for determining their benchmark value applicable to their facility. The ranges occur in 25 mg/L increments. Hardness Dependent Hardness-based benchmarks follow Table 8.2-1 and the requirements in Appendix E.

8.G.8.3 Additional Analytic Monitoring Requirements for Discharges from Waste Rock and Overburden Piles at Active Metal Mining Facilities. In addition to the monitoring required in Part 8.G.8.2 for discharges from waste rock and overburden piles, you must also conduct monitoring for additional parameters based on the type of ore you mine at your site. The schedule for monitoring for this Part 8.G.8.3 is the same as specified in Part 8.G.8.2: once in the first year for the parameters listed in Table 8.G-3 (except radium and uranium), and twice annually in all subsequent years of coverage under this permit for any parameters for which the benchmark has been exceeded. Where a parameter in Table 8.G-3 is the same as a pollutant you are required to monitor for in Table 8.G-2 (i.e., for all of the metals), you must use the corresponding benchmark in Table 8.G-2 and you may use any monitoring results conducted for Part 8.G.8.2 to satisfy the monitoring requirement for that parameter for Part 8.G.8.3. For radium and uranium, which do not have corresponding benchmarks in Table 8.G-2, there are no applicable benchmarks. For radium and uranium, you must monitor quarterly (as identified in Part 6.1.7) for your first four full quarters of permit coverage, after which you may discontinue monitoring for these two parameters.

Table 8.G-3. Additional Monitoring Requirements for Discharges from Waste Rock and Overburden Piles			
Supplemental Requirements			
Type of Ore Mined	Pollutants of Concern		
	Total Suspended Solids (TSS)	pH	Metals, Total
Tungsten Ore	X	X	Arsenic, Cadmium (H), Copper (H), Lead (H), Zinc (H)
Nickel Ore	X	X	Arsenic, Cadmium (H), Copper (H), Lead (H), Zinc (H)
Aluminum Ore	X	X	Iron
Mercury Ore	X	X	Nickel (H)
Iron Ore	X	X	Iron (Dissolved)
Platinum Ore			Cadmium (H), Copper (H), Mercury, Lead (H), Zinc (H)
Titanium Ore	X	X	Iron, Nickel (H), Zinc (H)
Vanadium Ore	X	X	Arsenic, Cadmium (H), Copper (H), Lead (H), Zinc (H)

Table continued on next page.

Type of Ore Mined	Pollutants of Concern		
	Total Suspended Solids (TSS)	pH	Metals, Total
Molybdenum	X	X	Arsenic, Cadmium (H), Copper (H), Lead (H), Mercury, Zinc (H)
Uranium, Radium, and Vanadium Ore	X	X	Chemical Oxygen Demand, Arsenic, Radium (Dissolved and Total), Uranium, Zinc (H)

Note: An “X” indicated for TSS and/or pH means that you are required to monitor for those parameters. (H) indicates that hardness must also be measured when this pollutant is measured.

8.G.8.4 Inactive and Unstaffed Sites – Conditional Exemption from No Exposure Requirements for Quarterly Visual Assessments and Routine Facility Inspections. As a Sector G facility, if you are seeking to exercise a waiver from the quarterly visual assessment and routine facility inspection requirements for inactive and unstaffed sites (including temporarily inactive sites), you are conditionally exempt from the requirement to certify that “there are no industrial materials or activities exposed to storm water” in Parts 4.2.3 and 6.2.1.3. This exemption is conditioned on the following:

- If circumstances change and your facility becomes active and/or staffed, this exception no longer applies and you must immediately begin complying with the quarterly visual assessment requirements; and
- NDEE retains the authority to revoke this exemption and/or the monitoring waiver where it is determined that the discharge causes, has a reasonable potential to cause, or contributes to an in-stream excursion above an applicable water quality standard, including designated uses.

Subject to the two conditions above, if your facility is inactive and unstaffed, you are waived from the requirement to conduct quarterly visual assessments and routine facility inspections. You are not waived from conducting the Part 4.3 comprehensive site inspection. You are encouraged to inspect your site more frequently where you have reason to believe that severe weather or natural disasters may have damaged control measures or increased discharges.

Discharge/Source of Discharge	Note/Comment
Piles	
Waste rock/overburden	Covered under this permit if composed entirely of storm water and not combining with mine drainage. See note below.
Topsoil	--
Roads constructed of waste rock or spent ore	
Onsite haul roads	Covered under this permit except if composed entirely of storm water and not combined with mine drainage. See note below.
Offsite haul and access roads	--
Roads not constructed of waste rock or spent ore	
Onsite haul roads	Covered under this permit except if mine drainage is used for dust control.
Offsite haul and access roads	--

Table continued on next page.

Discharge/Source of Discharge	Note/Comment
Milling/concentrating	
Runoff from tailings dams and dikes when constructed of waste rock/tailings	Covered under this permit except if process fluids are present and only if composed entirely of storm water and not combined with mine drainage. See Note below.
Runoff from tailings dams/dikes when not constructed of waste rock and tailings	Covered under this permit except if process fluids are present.
Concentration building	Covered under this permit if storm water only and no contact with piles.
Mill site	Covered under this permit if storm water only and no contact with piles.
Ancillary areas	
Office and administrative building and housing	Covered under this permit if mixed with storm water from the industrial area.
Chemical storage area	--
Docking facility	Covered under this permit except if excessive contact with waste product that would otherwise constitute mine drainage.
Explosive storage	--
Fuel storage (oil tanks/coal piles)	--
Vehicle and equipment maintenance area/building	--
Parking areas	Covered under this permit but coverage unnecessary if only employee and visitor-type parking.
Power plant	
Truck wash area	Covered under this permit except when excessive contact with waste product that would otherwise constitute mine drainage.
Reclamation-related areas	
Any disturbed area (unreclaimed)	Covered under this permit only if not in active mining area.
Reclaimed areas released from reclamation requirements and returned to a beneficial use	--
Partially/inadequately reclaimed areas or areas not released from reclamation requirements	--

Note: Storm water runoff from these sources are subject to the NPDES program for storm water unless mixed with discharges subject to 40 CFR Part 440 that are regulated by another permit prior to mixing. Non-storm water discharges from these sources are subject to NPDES permitting and may be subject to the effluent limitation guidelines under 40 CFR Part 440. Discharges from overburden/waste rock and overburden/waste rock-related areas are not subject to 40 CFR Part 440 unless: (1) it drains naturally (or is intentionally diverted) to a point source; and (2) combines with "mine drainage" that is otherwise regulated under the Part 440 regulations. For such sources, coverage under this permit would be available if the discharge composed entirely of storm water does not combine with other sources of mine drainage that are not subject to 40 CFR Part 440, as well as meeting other eligibility criteria contained in Part 1.1 of the permit. Permit applicants bear the initial responsibility for determining the applicable technology-based standard for such discharges.

8.G.9. Termination of Permit Coverage. A site or a portion of a site that has been released from applicable Federal, State, or local reclamation requirements and has been reclaimed as defined in Part 8.G.3.5 is no longer required to maintain coverage under this permit.

8.H Sector H – Coal Mines and Coal Mining-Related Facilities

Note: Where compliance with a requirement in a separate exploration permit, mining permit, reclamation plan, Surface Mining Control and Reclamation Act (SMCRA) requirements, etc. will result in you fully meeting any requirement in this Subpart, you are considered to have complied with the relevant requirement in this Subpart. You must include documentation in your SWPPP describing your rationale for concluding that any particular action on your part is sufficient to comply with the corresponding requirement in this Subpart.

8.H.1 Covered Storm Water Discharges. The requirements in Subpart H apply to storm water discharges associated with industrial activity from Coal Mines and Coal Mining-Related facilities as identified by the SIC Codes specified under Sector H in Table D-1 of Appendix D.

8.H.2 Limitations on Coverage

8.H.2.1 Prohibition of Non-Storm Water Discharges. (See also Part 1.1.4) Not covered by this permit: discharges from pollutant seeps or underground drainage from inactive coal mines and refuse disposal areas that do not result from precipitation events, and discharges from floor drains in maintenance buildings and other similar drains in mining and preparation plant areas.

8.H.2.2 Discharges Subject to Storm Water Effluent Guidelines. (See also Part 1.1.4.4) Not authorized by this permit: storm water discharges subject to an existing effluent limitation guideline at NDEE Title 119, Chapter 27, Part 007.09 (see 40 CFR Part 434).

8.H.2.3 Authorized Non-Storm Water Discharges (See also Part 1.1.3) The following non-storm water discharges are only authorized for earth-disturbing activities conducted prior to active mining activities, as defined in Part 8.H.3.1, provided that, with the exception of water used to control dust, these discharges are not routed to areas of exposed soil and all discharges comply with the permit's effluent limits. Once the earth-disturbing activities conducted prior to active mining activities have ceased, the only authorized non-storm water discharges for Sector H are: water used to wash vehicles and equipment, provided that there is no discharge of soaps, solvents, or detergents used for such purposes; and water used to control dust.

8.H.3 Definitions. The following definitions are not intended to supersede the definitions of active and inactive mining facilities established by 40 CFR Part 122.26(b)(14)(iii).

8.H.3.1 Mining operation - For the permit, mining operations are grouped into two distinct categories, with distinct effluent limits and requirements applicable to each: a) earth-disturbing activities (i.e., exploration, clearing, grading, excavation, and construction) conducted prior to active mining activities; and b) active mining activities, which includes reclamation. "Mining operations" can occur at both inactive mining facilities and temporarily inactive mining facilities.

8.H.3.2 Exploration phase - Entails earth-disturbing activities conducted prior to active mining activities. This includes exploration and land disturbance activities to determine the viability of a site and activities performed for purposes of mine site preparation where active mining has not yet commenced (e.g., for heap leach pads, waste rock facilities, tailings impoundments, wastewater treatment plants).

8.H.3.3 Construction phase - Consists of the construction of staging areas for structure construction such as to house project personnel and equipment, mill buildings, etc., and the building of site access roads.

8.H.3.4 Active mining phase - Activities including the extraction, removal or recovery, and beneficiation of metal ore. Includes the removal of overburden and waste rock to expose mineable minerals. All such activities occur within the "active mining area" as defined at 40 CFR Part 440.132(a), a place where work or other activity related to the extraction, removal or recovery of metal ore is being conducted, except, with respect to surface mines, any area of land on or in

which grading has been completed to return the earth to desired contour and reclamation work has begun.

8.H.3.5 Reclamation phase - Activities undertaken, in compliance with applicable mined land reclamation requirements, to return the land to an appropriate post-mining contour and land use in order to meet applicable Federal, State, and local reclamation requirements. The reclamation phase is considered part of the active mining activities.

A site or portion of a site is considered to have been reclaimed if storm water runoff that comes into contact with: 1) raw materials, intermediate byproducts, finished products, and waste products does not have the potential to cause or contribute to violations of state water quality standards; (2) soil disturbing activities related to mining at the sites or portion of the site have been completed; (3) the site or portion of the site has been stabilized to minimize soil erosion; and (4) as appropriate depending on location, size, and the potential to contribute pollutants to storm water discharges, the site or portion of the site has been revegetated, will be amenable to natural revegetation, or will be left in a condition consistent with the post-mining land use.

8.H.3.6 Active coal mining facility - A place where work or other activity related to the extraction, removal, or recovery of coal is being conducted. For surface mines, this definition does not include any land where grading has returned the earth to a desired contour and reclamation has begun. This definition is derived from the definition of “active mining area” found at 40 CFR Part 434.11(b).

8.H.3.7 Inactive coal mining facility - A site or portion of a site where coal mining and/or milling occurred in the past but is not an active facility as defined above, and where the inactive portion is not covered by an active mining permit issued by the applicable Federal, State, or local agency. An inactive coal mining facility has an identifiable owner / operator. Sites where mining claims are being maintained prior to disturbances associated with the extraction, beneficiation, or processing of mined materials and sites where minimal activities are undertaken for the sole purpose of maintaining a mining claim are not considered either active or inactive mining facilities and do not require an NPDES industrial storm water permit.

8.H.3.8 Temporarily inactive coal mining facility - A site or portion of a site where coal mining and/or milling occurred in the past but currently are not being actively undertaken, and the facility is covered by an active mining permit issued by the applicable Federal, State, or local agency.

8.H.3.9 Final stabilization - A site or portion of a site is “finally stabilized” when it has implemented all applicable Federal, State, and local reclamation requirements and the site has been returned to a beneficial use.

8.H.4 Technology-Based Effluent Limits Applicable to All Earth-Disturbing Activities Conducted Prior to Active Mining Activities. Clearing, grading, and excavation activities being conducted as part of the exploration and construction phase of mining activities are covered under this permit.

8.H.4.1 Management Practices for Earth-Disturbing Activities.

8.H.4.1.1 Selecting and installing control measures. For all areas affected by clearing, grading, and excavation activities, you must select, design, install, and implement control measures that meet applicable Part 2 effluent limits.

8.H.4.1.2 Good Housekeeping. Litter, debris, and chemicals must be prevented from becoming a pollutant source in storm water discharges.

8.H.4.1.3 Retention and Detention of Storm water Runoff. For drainage locations serving more than one acre, sediment basins and/or temporary sediment traps should be used. At a minimum, silt fences, vegetative buffer strips, or equivalent sediment controls are required for all down slope boundaries (and side slope boundaries as necessary based on individual site conditions) of the development area unless a sediment basin providing

storage for a calculated volume of runoff from a 2-year, 24-hour storm or 3,600 cubic feet of storage per acre drained is provided. You are required to remove sediment from sediment traps or sedimentation ponds when design capacity has been reduced by 50 percent. Due to high sediment discharges from some Sector H facilities, permittees may need to implement a combination of structural BMP approaches to sufficiently decrease discharge of sediment from their facilities.

8.H.4.2 Inspection of Earth-Disturbing Activities.

8.H.4.2.1 Inspection Frequency. Inspections must be conducted at least once every 14 calendar days and within 24 hours of the end of a storm event of 0.5 inches or greater. Inspection frequency may be reduced to at least once every month if the entire site is temporarily stabilized (pursuant to Part 8.H.4.3.2), if runoff is unlikely due to winter conditions (e.g., site is covered with snow, ice, or the ground is frozen), or construction is occurring during seasonal dry periods in semi-arid areas. Reduced inspection frequency does not relieve the permittee of the maintenance responsibilities during interim periods.

8.H.4.2.2 Location of Inspections. Inspections must include all areas of the site disturbed by clearing, grading, and/or excavation activities and areas used for storage of materials that are exposed to precipitation. Sedimentation and erosion control measures must be observed to ensure proper operation. Discharge locations must be inspected to ascertain whether erosion control measures are effective in preventing significant impacts to waters of the state, where accessible. Where discharge locations are inaccessible, nearby downstream locations must be inspected to the extent that such inspections are practicable. Locations where vehicles enter or exit the site must be inspected for evidence of significant off-site sediment tracking.

8.H.4.2.3 Inspection Reports. For each inspection required above, you must complete an inspection report. At a minimum, the inspection report must include the information required in Part 4.1.

8.H.4.3 Requirements for Cessation of Earth-Disturbing Activities.

8.H.4.3.1 Inspections and Maintenance. Inspections and maintenance of control measures, including BMPs, associated with clearing, grading, and/or excavation activities being conducted as part of the exploration and construction phase of a mining operation must continue until final stabilization has been achieved on all portions of the disturbed area.

8.H.4.3.2 Temporary Stabilization of Disturbed Areas. Stabilization measures should be initiated immediately in portions of the site where clearing, grading and/or excavation activities have temporarily ceased, but in no case more than 14 days after the clearing, grading and/or excavation activities in that portion of the site have temporarily ceased. In semi-arid and drought-stricken areas, or where initiating perennial vegetative stabilization measures is not possible within 14 days after mining, exploration, and/or construction activity has temporarily ceased due to winter conditions (e.g., site is covered with snow, ice, or the ground is frozen), temporary vegetative stabilization measures must be initiated as soon as practicable. Until temporary vegetative stabilization is achieved, interim measures such as erosion control blankets with an appropriate seed base and tackifiers must be employed. In areas of the site, where exploration and/or construction has permanently ceased prior to active mining, temporary stabilization measures must be implemented to minimize mobilization of sediment or other pollutants until such time as the active mining phase commences.

8.H.4.3.3 Final Stabilization of Disturbed Areas. Stabilization measures should be initiated immediately in portions of the site where exploration and/or construction

activities have permanently ceased, but in no case more than 14 days after the exploration and/or construction activity in that portion of the site has permanently ceased. In semi-arid and drought-stricken areas, or where initiating perennial vegetative stabilization measures is not possible within 14 days after mining, exploration, and/or construction activity has permanently ceased due to winter conditions (e.g., site is covered with snow, ice, or the ground is frozen), temporary vegetative stabilization measures must be initiated as soon as possible. Until final stabilization is achieved temporary stabilization measures, such as erosion control blankets with an appropriate seed base and tackifiers, must be used.

8.H.5 Technology-Based Effluent Limits for Active Mining Activities.

8.H.5.1 Good Housekeeping Measures. (See also Part 2.1.2.2) As part of your good housekeeping program, in order to minimize discharges of pollutants in storm water, implement control measures such as the following, where determined feasible (list not inclusive): using sweepers and covered storage; watering haul roads to minimize dust generation; and conserving vegetation to minimize erosion.

8.H.5.2 Preventive Maintenance. (See also Part 2.1.2.3) Perform inspections or other equivalent measures of storage tanks and pressure lines of fuels, lubricants, hydraulic fluid, and slurry to prevent leaks due to deterioration or faulty connections.

8.H.6 Additional SWPPP Requirements. Note: The requirements in Part 8.H.6 are not applicable to inactive coal mining facilities.

8.H.6.1 Other Applicable Regulations. Most active coal mining-related areas (SIC Codes 1221-1241) are subject to sediment and erosion control regulations of the U.S. Office of Surface Mining (OSM) that enforces the Surface Mining Control and Reclamation Act (SMCRA). All SMCRA requirements regarding control of storm water-related pollutant discharges must be addressed and then documented with the SWPPP (directly or by reference).

8.H.6.2 Site Map. (See also Part 5.1.2) Document in your SWPPP where any of the following may be exposed to precipitation or storm water: haul and access roads; railroad spurs, sliding, and internal hauling lines; conveyor belts, chutes, and aerial tramways; equipment storage and maintenance yards; coal handling buildings and structures; inactive mines and related areas; acidic spoil, refuse, or unreclaimed disturbed areas; and liquid storage tanks containing pollutants such as caustics, hydraulic fluids, and lubricants.

8.H.6.3 Potential Pollutant Sources. (See also Part 5.1.3) Document in your SWPPP the following sources and activities that have potential pollutants associated with them: truck traffic on haul roads and resulting generation of dust or sediment that could be discharged via storm water; fuel or other liquid storage; pressure lines containing slurry, hydraulic fluid, or other potential harmful liquids; and loading or temporary storage of acidic refuse or spoil.

8.H.7 Additional Inspection Requirements

8.H.7.1 Inspections of Active Mining-Related Areas. (See also Part 4) Except for earth-disturbing activities conducted as part of the exploration and construction phase, which are subject to Part 8.H.4.2.1, perform quarterly inspections of active mining areas covered by this permit, corresponding with the inspections as performed by SMCRA inspectors, of all mining-related areas required by SMCRA. Also maintain the records of the SMCRA authority representative. See Part 8.H.8.1 for inspection requirements for inactive and unstaffed sties.

8.H.7.2 Sediment and Erosion Control. (See also Part 2.1.2.5) As indicated in Part 8.H.6.1, SMCRA requirements regarding sediment and erosion control measures must be complied with for those areas subject to SMCRA authority, including inspection requirements.

8.H.7.3 Comprehensive Site Inspections. (See also Part 4.3) Your inspection program must include inspections for pollutants entering the drainage system from activities located on or near coal mining-related areas. Among the areas to be inspected are haul and access roads; railroad spurs, sliding, and internal hauling lines; conveyor belts, chutes, and aerial tramways; equipment storage and maintenance yards; coal handling buildings and structures; and inactive mines and related areas.

8.H.8 Sector-Specific Benchmarks. (See also Part 6)

Table 8.H-1		
Subsector (You may be subject to requirements for more than one sector/subsector)	Parameter	Benchmark Monitoring Concentration
Subsector H1. Coal Mines and Related Areas (SIC 1221-1241)	Total Aluminum	0.75 mg/L
	Total Suspended Solids (TSS)	100 mg/L

8.H.8.1 Inactive and Unstaffed Sites – Conditional Exemption from No Exposure Requirement for Routine Inspections, Quarterly Visual Assessments, and Indicator, Benchmark, and Impaired Waters Monitoring. As a Sector H facility, if you are seeking to exercise a waiver from either the quarterly visual assessment or the indicator, benchmark and/or impaired waters monitoring requirements for inactive and unstaffed sites (including temporarily inactive sites), you are conditionally exempt from the requirement to certify that “there are no industrial materials or activities exposed to storm water” in Parts 4.2.3, 6.2.1.3, and 6.2.2.3. Additionally, if you are seeking to reduce your required quarterly routine inspection frequency to a once annual comprehensive inspection, as is allowed under Part 4.1.3, you are also conditionally exempt from the requirement to certify that “there are no industrial materials or activities exposed to storm water.” These conditional exemptions are based on the following requirements:

- If circumstances change and your facility becomes active and/or staffed, this exception no longer applies and you must immediately begin complying with the applicable benchmark monitoring requirements as if you were in your first year of permit coverage, and the quarterly visual assessment requirements; and
- NDEE retains the authority to revoke this exemption and/or the monitoring waiver where it is determined that the discharge causes, has a reasonable potential to cause or contribute to an in-stream excursion above an applicable water quality standard, including designated uses.

Subject to the two conditions above, if your facility is inactive and unstaffed, you are waived from the requirement to conduct quarterly visual assessments and routine facility inspections. You are not waived from conducting the Part 4.3 comprehensive site inspection. You are encouraged to inspect your site more frequently where you have reason to believe that severe weather or natural disasters may have damaged control measures or increased discharges.

8.H.9 Termination of Permit Coverage. A site or a portion of a site that has been released from applicable Federal, State, or local reclamation requirements and has been reclaimed as defined in Part 8.H.3.5 is no longer required to maintain coverage under this permit.

8.I Sector I – Oil and Gas Extraction

8.I.1 Covered Storm Water Discharges. The requirements in Subpart I apply to storm water discharges associated with industrial activity from Oil and Gas Extraction facilities as identified by the SIC Codes specified under Sector I in Table D-1 of Appendix D of the permit.

8.I.1.1 Discharges of storm water runoff from field activities or operations associated with oil and gas exploration, production, processing, or treatment operations or transmission facilities are exempt from NPDES permit coverage unless, in accordance with NDEE Title 119, Chapter 10, Part 003.03, the facility:

- Has had a discharge of storm water resulting in the discharge of a reportable quantity for which notification is or was required; or
- Contributes to a violation of a water quality standard.

Any storm water discharges that require permit coverage as a result of meeting one of the conditions of NDEE Title 119, Chapter 10, Part 003.03 may be covered under this permit unless otherwise required to obtain coverage under an alternative NPDES general permit or an individual NPDES permit as specified in Part 1.6.1.

8.I.2 Limitations on Coverage.

8.I.2.1 Storm Water Discharges Subject to Effluent Limitation Guidelines. (See also Part 1.1.4.4) This permit does not authorize storm water discharges from petroleum drilling operations that are subject to nationally established effluent limitation guidelines found at NDEE Title 119, Chapter 27, Part 007.37 (see 40 CFR Part 435).

8.I.2.2 Non-Storm Water Discharges. Discharges of vehicle and equipment wash water, including tank cleaning operations, are not authorized by this permit. Alternatively, wash water discharges must be authorized under a separate NPDES permit, or be discharged to a sanitary sewer in accordance with applicable industrial pretreatment requirements.

8.I.3 Additional Technology-Based Effluent Limits.

8.I.3.1 Vegetative Controls. Implement vegetative practices designed to preserve existing vegetation, where attainable, and revegetate open areas as soon as practicable after grade drilling. Implement appropriate vegetative practices, such as the following (list not exclusive): temporary or permanent seeding, mulching, sod stabilization, vegetative buffer strips, and tree protection practices. Begin implementing appropriate vegetative practices on all disturbed areas within 14 days following the last activity in that area.

8.I.4 Additional SWPPP Requirements.

8.I.4.1 Drainage Area Site Map. (See also Part 5.1.2) Document in your SWPPP where any of the following may be exposed to precipitation or storm water: Reportable Quantity (RQ) releases; locations used for the treatment, storage, or disposal of wastes; processing areas and storage areas; chemical mixing areas; construction and drilling areas; all areas subject to the effluent guidelines requirements for “No Discharge” in accordance with NDEE Title 119, Chapter 27, Part 007.37 (see 40 CFR Part 435.32); and the structural controls to achieve compliance with the “No Discharge” requirements.

8.I.4.2 Potential Pollutant Sources. (See also Part 5.1.3) Also document in your SWPPP the following sources and activities that have potential pollutants associated with them: chemical, cement, mud, or gel mixing activities; drilling or mining activities; and equipment cleaning and rehabilitation activities. In addition, include information about the reportable quantity (RQ) release that triggered the permit application requirements: the nature of the release (e.g., spill of oil from a drum storage area); amount of oil or hazardous substance released; amount of substance recovered; date of the release; cause of the release (e.g., poor handling techniques and

lack of containment in the area); areas affected by the release (i.e., land and water); procedure to clean up release; actions or procedures implemented to prevent or improve response to a release; and remaining potential contamination of storm water from release (taking into account human health risks, the control of drinking water intakes, and the designated uses of the receiving water).

8.I.4.3 Erosion and Sedimentation Control. (See also Part 2.1.2.5) Unless covered by the current Construction Storm Water General Permit (CSW-GP), the additional documentation requirements for sediment and erosion controls for well drillings and sand/shale mining areas include the following:

8.I.4.3.1 Site Description. Also include a description in your SWPPP of the nature of the exploration activity, estimates of the total area of site and area disturbed due to exploration activity, an estimate of runoff coefficient of the site, a site drainage map, including approximate slopes, and the names of all receiving waters.

8.I.4.3.2 Vegetative Controls. Document vegetative practices used consistent with Part 8.I.3.1 in the SWPPP.

8.I.5 Additional Inspection Requirements. All erosion and sedimentation control measures must be inspected either: every 7 days; or once every 14 calendar days and within 24 hours of a storm event of 0.25 inches or greater.

8.J Sector J – Non-Metallic Mineral Mining and Dressing

Note: Where compliance with a requirement in a separate exploration permit, mining permit, reclamation plan, Surface Mining Control and Reclamation Act (SMCRA) requirements, etc. will result in you fully meeting any requirement in this Subpart, you are considered to have complied with the relevant requirement in this Subpart. You must include documentation in your SWPPP describing your rationale for concluding that any particular action on your part is sufficient to comply with the corresponding requirement in this Subpart.

8.J.1 Covered Storm Water Discharges. The requirements in Subpart J apply to storm water discharges associated with industrial activity from Active and Inactive Non-Metallic Mineral Mining and Dressing facilities as identified by the SIC Codes specified under Sector J in Table D-1 of Appendix D of the permit.

8.J.1.1 Covered Discharges from Inactive Facilities. All storm water discharges.

8.J.1.2 Covered Discharges from Active and Temporarily Inactive Facilities. All storm water discharges, except for discharges subject to the existing effluent limitation guideline at NDEE Title 119, Chapter 27, Part 007.34 (40 CFR Part 436).

8.J.1.3 Covered Discharges from Exploration and Construction of Non-Metallic Mineral Mining Facilities. All storm water discharges.

8.J.1.4 Covered Discharges from Sites Undergoing Reclamation. All storm water discharges.

8.J.2 Limitations on Coverage.

8.J.2.1 Prohibition of Non-Storm Water Discharges. (See also Part 1.1.4) Most storm water discharges subject to an existing effluent limitation guideline at NDEE Title 119, Chapter 27, Part 007.34 (see 40 CFR Part 436) are not authorized by this permit. The exceptions to this limitation, which are covered by this permit, are mine dewatering discharges composed entirely of storm water and/or uncontaminated ground water seepage from construction sand and gravel, industrial sand, and crushed stone mining facilities.

8.J.2.2 Authorized Non-Storm Water Discharges (See also Part 1.1.3) The following non-storm water discharges are only authorized for earth-disturbing activities conducted prior to active mining activities, as defined in Part 8.J.3.1, provided that, with the exception of water used to control dust, these discharges are not routed to areas of exposed soil and all discharges comply with the permit's effluent limits. Once the earth-disturbing activities conducted prior to active mining activities have ceased, the only authorized non-storm water discharges for Sector J are: water used to wash vehicles and equipment, provided that there is no discharge of soaps, solvents, or detergents used for such purposes; and water used to control dust.

8.J.3 Definitions. The following definitions are not intended to supersede the definitions of active and inactive mining facilities established by 40 CFR Part 122.26(b)(14)(iii).

8.J.3.1 Mining operations - For the permit, mining operations are grouped into two distinct categories, with distinct effluent limits and requirements applicable to each: a) earth-disturbing activities (i.e., exploration, clearing, grading, excavation, and construction) conducted prior to active mining activities; and b) active mining activities, which includes reclamation. "Mining operations" can occur at both inactive mining facilities and temporarily inactive mining facilities.

8.J.3.2 Exploration phase - Entails earth-disturbing activities conducted prior to active mining activities. This includes exploration and land disturbance activities to determine the viability of a site and activities performed for purposes of mine site preparation where active mining has not yet commenced (e.g., for heap leach pads, waste rock facilities, tailings impoundments, wastewater treatment plants).

8.J.3.3 Construction phase - Consists of the construction of staging areas for structure construction such as to house project personnel and equipment, mill buildings, etc., and the building of site access roads.

8.J.3.4 Active mining phase - Activities including the extraction, removal or recovery, and beneficiation of non-metallic minerals. Includes the removal of overburden and waste rock to expose mineable minerals. All such activities occur within the “active mining area” as defined at 40 CFR Part 440.132(a), a place where work or other activity related to the extraction, removal or recovery of metal ore is being conducted, except, with respect to surface mines, any area of land on or in which grading has been completed to return the earth to desired contour and reclamation work has begun.

8.J.3.5 Reclamation phase - Activities undertaken, in compliance with applicable mined land reclamation requirements, to return the land to an appropriate post-mining contour and land use in order to meet applicable Federal, State, and local reclamation requirements. The reclamation phase is considered part of the active mining activities.

A site or portion of a site is considered to have been reclaimed if storm water runoff that comes into contact with: 1) raw materials, intermediate byproducts, finished products, and waste products does not have the potential to cause or contribute to violations of state water quality standards; (2) soil disturbing activities related to mining at the sites or portion of the site have been completed; (3) the site or portion of the site has been stabilized to minimize soil erosion; and (4) as appropriate depending on location, size, and the potential to contribute pollutants to storm water discharges, the site or portion of the site has been revegetated, will be amenable to natural revegetation, or will be left in a condition consistent with the post-mining land use.

8.J.3.6 Active Mineral Mining Facility - A place where work or other activity related to the extraction, removal, or recovery of non-metallic minerals is being conducted. For surface mines, this definition does not include any land where grading has returned the earth to a desired contour and reclamation has begun. This definition is derived from the definition of “active mining area” found at 40 CFR Part 440.132(a).

8.J.3.7 Inactive Mineral Mining Facility - A site or portion of a site where mineral mining and/or milling occurred in the past but is not an active facility as defined above, and where the inactive portion is not covered by an active mining permit issued by the applicable Federal, State, or local agency. An inactive mineral mining facility has an identifiable owner / operator. Sites where mining claims are being maintained prior to disturbances associated with the extraction, beneficiation, or processing of mined materials, and sites where minimal activities are undertaken for the sole purpose of maintaining a mining claim are not considered either active or inactive mining facilities and do not require an NPDES industrial storm water permit.

8.J.3.8 Temporarily Inactive Mineral Mining Facility - A site or portion of a site where non-metal mining and/or milling occurred in the past but currently are not being actively undertaken, and the facility is covered by an active mining permit issued by the applicable Federal, State or local agency.

8.J.3.9 Final Stabilization - a site or portion of a site is “finally stabilized” when it has implemented all applicable Federal, State, and local reclamation requirements and the site has been returned to a beneficial use.

8.J.4 Technology-Based Effluent Limits Applicable for All Earth-Disturbing Activities. Clearing, grading, and excavation activities being conducted as part of the exploration and construction phase of mining activities are covered under this permit.

8.J.4.1 Management Practices for Earth-Disturbing Activities.

8.J.4.1.1 Selecting and installing control measures. For all areas affected by clearing, grading, and excavation activities, you must select, design, install, and implement control measures that meet applicable Part 2 effluent limits.

8.J.4.1.2 Good Housekeeping. (See also Part 2.1.2.2) Litter, debris, and chemicals must be prevented from becoming a pollutant source in storm water discharges.

8.J.4.1.3 Retention and Detention of Storm water Runoff. For drainage locations serving more than one acre, sediment basins and/or temporary sediment traps should be used. At a minimum, silt fences, vegetative buffer strips, or equivalent sediment controls are required for all down slope boundaries (and for those side slope boundaries deemed appropriate as dictated by individual site conditions) of the development area unless a sediment basin providing storage for a calculated volume of runoff from a 2-year, 24-hour storm or 3,600 cubic feet of storage per acre drained is provided.

8.J.4.2 Inspection of Earth-Disturbing Activities. (See also Part 4)

8.J.4.2.1 Inspection Frequency. Inspections must be conducted at least once every 14 calendar days and within 24 hours of the end of a storm event of 0.5 inches or greater. Inspection frequency may be reduced to at least once every month if the entire site is temporarily stabilized (pursuant to Part 8.J.4.3.2), if runoff is unlikely due to winter conditions (e.g., site is covered with snow, ice, or the ground is frozen), or construction is occurring during seasonal dry periods in semi-arid areas. Reduced inspection frequency does not relieve the permittee of the maintenance responsibilities during interim periods.

8.J.4.2.2 Location of Inspections. Inspections must include all areas of the site disturbed by clearing, grading, and/or excavation activities and areas used for storage of materials that are exposed to precipitation. Sedimentation and erosion control measures implemented must be observed to ensure proper operation. Discharge locations must be inspected to ascertain whether erosion control measures are effective in preventing significant impacts to waters of the state, where accessible. Where discharge locations are inaccessible, nearby downstream locations must be inspected to the extent that such inspections are practicable. Locations where vehicles enter or exit the site must be inspected for evidence of significant off-site sediment tracking.

8.J.4.2.3 Inspection Reports. (See also Part 4.1) For each inspection required above, you must complete an inspection report. At a minimum, the inspection report must include the information required in Part 4.1.

8.J.4.3 Requirements for Cessation of Earth-Disturbing Activities.

8.J.4.3.1 Inspections and Maintenance. Inspections and maintenance of control measures, including any BMPs, associated with clearing, grading, and/or excavation activities being conducted as part of the exploration and construction phase of a mining operation must continue until final stabilization has been achieved on all portions of the disturbed area or until the commencement of the active mining phase for those areas that have been temporarily stabilized as a precursor to mining

8.J.4.3.2 Temporary Stabilization of Disturbed Areas. Stabilization measures should be initiated immediately in portions of the site where clearing, grading and/or excavation activities have temporarily ceased, but in no case more than 14 days after the clearing, grading and/or excavation activities in that portion of the site have temporarily ceased. In semi-arid and drought-stricken areas, or during snow or freezing conditions, where initiating perennial vegetative stabilization measures is not possible within 14 days after mining, exploration, and/or construction activity has temporarily ceased, temporary

vegetative stabilization measures must be initiated as soon as practicable. Until temporary vegetative stabilization is achieved, interim measures such as erosion control blankets with an appropriate seed base and tackifiers must be employed. In areas of the site, where exploration and/or construction has permanently ceased prior to active mining, temporary stabilization measures must be implemented to minimize mobilization of sediment or other pollutants until such time as the active mining phase commences.

8.J.4.3.3 Final Stabilization of Disturbed Areas. Stabilization measures should be initiated immediately in portions of the site where mining, exploration, and/or construction activities have permanently ceased, but in no case more than 14 days after the exploration and/or construction activity in that portion of the site has permanently ceased. In semi-arid and drought-stricken areas, or during snow or freezing conditions, where initiating perennial vegetative stabilization measures is not possible within 14 days after mining, exploration, and/or construction activity has permanently ceased, final vegetative stabilization measures must be initiated as soon as possible. Until final stabilization is achieved temporary stabilization measures, such as erosion control blankets with an appropriate seed base and tackifiers must be used.

8.J.5 Technology-Based Effluent Limits for Active Mining Activities.

8.J.5.1 Employee Training. Conduct employee training at least annually at active and temporarily inactive sites. (See also Part 2.1.2.9)

8.J.5.2 Storm Water Controls. Apart from the control measures you implement to meet your Part 2 effluent limits, where necessary to minimize pollutant discharges, implement the following control measures at your site. The potential pollutants identified in Part 8.J.6.3 shall determine the priority and appropriateness of the control measures selected. For mines subject to dust control requirements under state or county air quality permits, provided the requirements are equivalent, compliance with such air permit dust requirements shall constitute compliance with the dust control effluent limit in Part 2.1.2.11.

Storm Water Diversions: Divert storm water away from potential pollutant sources through implementation of control measures such as the following, where determined feasible (list not exclusive): interceptor or diversion controls (e.g., dikes, swales, curbs, or berms); pipe slope drains; subsurface drains; conveyance systems (e.g., channels or gutters, open-top box culverts, and waterbars; rolling dips and road sloping; roadway surface water deflector and culverts); or their equivalents.

Capping: When capping is necessary to minimize pollutant discharges in storm water, identify the source being capped and the material used to construct the cap.

Treatment: If treatment of storm water (e.g., chemical or physical systems, oil and water separators, artificial wetlands) is necessary to protect water quality, describe the type and location of treatment used. Passive and/or active treatment of storm water is encouraged. Treated storm water may be discharged as a storm water source regulated under this permit provided the discharge is not combined with discharges subject to effluent limitation guidelines for the Mineral Mining and Processing Point Source Category (NDEE Title 119, Chapter 27, Part 007.34, see 40 CFR Part 436).

8.J.5.3 Certification of Discharge Testing. (See also Part 5.1.3.4) Test or evaluate all outfalls covered under this permit for the presence of specific mining-related non-storm water discharges such as discharges subject to effluent limitations (e.g., 40 CFR Part 436). Alternately, if applicable, keep this certification with your SWPPP.

8.J.6 Additional SWPPP Requirements. Note: The requirements in Part 8.J.6 are not applicable to inactive mineral mining facilities.

8.J.6.1 Nature of Industrial Activities. (See also Part 5.1.2) Document in your SWPPP the mining and associated activities that can potentially affect the storm water discharges covered by this permit, including a general description of the location of the site relative to major transportation routes and communities.

8.J.6.2 Site Map. (See also Part 5.1.2) Document in your SWPPP the locations of the following (as appropriate): mining or milling site boundaries; access and haul roads; outline of the drainage areas of each storm water outfall within the facility with indications of the types of discharges from the drainage areas; location(s) of all permitted discharges covered under an individual NPDES permit; outdoor equipment storage, fueling, and maintenance areas; materials handling areas; outdoor manufacturing, outdoor storage, and material disposal areas; outdoor chemicals and explosives storage areas; overburden, materials, soils, or waste storage areas; location of mine drainage dewatering or other process water; heap leach pads; off-site points of discharge for mine dewatering and process water; surface waters; boundary of tributary areas that are subject to effluent limitations guidelines; and location(s) of reclaimed areas.

8.J.6.3 Potential Pollutant Sources. (See also Part 5.1.3) For each area of the mine or mill site where storm water discharges associated with industrial activities occur, document in your SWPPP the types of pollutants (e.g., heavy metals, sediment) likely to be present in significant amounts. For example, phosphate mining facilities will likely need to document pollutants such as selenium, which can be present in significant amounts in their discharges. Consider these factors: the mineralogy of the waste rock (e.g., acid forming); toxicity and quantity of chemicals used, produced, or discharged; the likelihood of contact with storm water; vegetation of site (if any); and history of significant leaks or spills of toxic or hazardous pollutants. Also include a summary of any existing waste rock or overburden characterization data and test results for potential generation of acid rock drainage.

8.J.6.4 Storm Water Controls. To the extent that you use any of the control measures in Part 8.J.5.2, document them in your SWPPP pursuant to Part 5.1.4. If control measures are implemented or planned but are not listed here (e.g., substituting a less toxic chemical for a more toxic one), include descriptions of them in your SWPPP.

8.J.6.4 Employee Training. All employee training(s) conducted in accordance with Part 8.J.5.1 must be documented with the SWPPP.

8.J.6.5 Certification of Permit Coverage for Commingled Non-Storm Water Discharges. If you determine that you are able to certify, consistent with Part 8.J.5.3, that a particular discharge composed of commingled storm water and non-storm water is covered under a separate NPDES permit, and that permit subjects the non-storm water portion to effluent limitations prior to any commingling, you must retain such certification with your SWPPP. This certification must identify the non-storm water discharges, the applicable NPDES permit(s), the effluent limitations placed on the non-storm water discharge by the permit(s), and the points at which the limitations are applied.

8.J.7 Additional Inspection Requirements. (See also Part 4) Except for earth-disturbing activities conducted as part of the exploration and construction phase, which are subject to Part 8.J.4.2.1, you must inspect sites at least quarterly unless adverse weather conditions make the site inaccessible. Sites which discharge to waters which are designated as outstanding waters must be inspected monthly. See Part 8.J.8.1 for inspection requirements for inactive and unstaffed sites.

8.J.8 Sector-Specific Benchmarks. (See also Part 6) Table 8.J-1 identifies benchmarks that apply to the specific subsectors of Sector J. These benchmarks apply to both your primary industrial activity and any co-located industrial activities, which describe your site activities.

Table 8.J-1		
Subsector (You may be subject to requirements for more than one sector/subsector)	Parameter	Benchmark Monitoring Concentration
Subsector J1. Sand and Gravel Mining (SIC 1442, 1446)	Nitrate plus Nitrite Nitrogen	0.68 mg/L
	Total Suspended Solids (TSS)	100 mg/L
Subsector J2. Dimension and Crushed Stone and Nonmetallic Minerals (except fuels) (SIC 1411, 1422-1429, 1481, 1499)	Total Suspended Solids (TSS)	100 mg/L

8.J.8.1 Inactive and Unstaffed Sites – Conditional Exemption from No Exposure Requirement for Routine Inspections, Quarterly Visual Assessments, and Benchmark Monitoring. As a Sector J facility, if you are seeking to exercise a waiver from either the routine inspection, quarterly visual assessment or the benchmark monitoring requirements for inactive and unstaffed sites (including temporarily inactive sites), you are conditionally exempt from the requirement to certify that “there are no industrial materials or activities exposed to storm water” in Parts 4.2.3 and 6.2.1.3, respectively. This exemption is conditioned on the following:

- If circumstances change and your facility becomes active and/or staffed, this exception no longer applies and you must immediately begin complying with the applicable benchmark monitoring requirements as if you were in your first year of permit coverage, and the quarterly visual assessment requirements; and
- NDEE retains the authority to revoke this exemption and/or the monitoring waiver where it is determined that the discharge causes, has a reasonable potential to cause, or contributes to an in-stream excursion above an applicable water quality standard, including designated uses.

Subject to the two conditions above, if your facility is inactive and unstaffed, you are waived from the requirement to conduct quarterly visual assessments and routine facility inspections. You are not waived from conducting the Part 4.3 comprehensive site inspection. You are encouraged to inspect your site more frequently where you have reason to believe that severe weather or natural disasters may have damaged control measures or increased discharges.

8.J.9 Effluent Limitations Based on Effluent Limitations Guidelines. (See also 6.2.3) Table 8.J-2 identifies effluent limitations that apply to the industrial activities described below. Compliance with these effluent limitations is to be determined based on discharges from these industrial activities independent of commingling with any other waste streams that may be covered under this permit.

Table 8.J-2		
Industrial Activity	Parameter	Effluent Limitation
Mine dewatering discharges at crushed stone mining facilities (SIC 1422 - 1429)	pH	6.0 – 9.0 S.U.
Mine dewatering discharges at construction sand and gravel mining facilities (SIC 1442)	pH	6.0 – 9.0 S.U.
Mine dewatering discharges at industrial sand mining facilities (SIC 1446)	Total Suspended Solids (TSS)	45 mg/L, daily maximum
		25 mg/L, monthly average
	pH	6.0 – 9.0 S.U.

8.J.10 Termination of Permit Coverage. A site or a portion of a site that has been released from applicable Federal, State, or local reclamation requirements and has been reclaimed as defined in Part 8.J.3.5 is no longer required to maintain coverage under this permit.

8.K Sector K – Hazardous Waste Treatment, Storage, or Disposal Facilities

8.K.1 Covered Storm Water Discharges. The requirements in Subpart K apply to storm water discharges associated with industrial activity from Hazardous Waste Treatment, Storage, or Disposal facilities (TSDFs) as identified by the Activity Code specified under Sector K in Table D-1 of Appendix D of the permit.

8.K.2 Industrial Activities Covered by Sector K. This permit authorizes storm water discharges associated with industrial activity from facilities that treat, store, or dispose of hazardous wastes, including those that are operating under interim status or a permit under subtitle C of Resource Conservation and Recovery Act (RCRA).

Disposal facilities that have been properly closed and capped, and have no significant materials exposed to storm water, are considered inactive and do not require coverage under this permit.

8.K.3 Limitations on Coverage.

8.K.3.1 Prohibition of Non-Storm Water Discharges. (See also Part 1.1.4) The following are not authorized by this permit: leachate, gas collection condensate, drained free liquids, contaminated ground water, laboratory-derived wastewater, and contact wash water from washing truck and railcar exteriors and surface areas that have come in direct contact with solid waste at the landfill facility.

8.K.4 Definitions.

8.K.4.1 Contaminated storm water - storm water that comes into direct contact with landfill wastes, the waste handling and treatment areas, or landfill wastewater as defined in Part 8.K.4.4. Some specific areas of a landfill that may produce contaminated storm water include (but are not limited to) the open face of an active landfill with exposed waste (no cover added); the areas around wastewater treatment operations; trucks, equipment, or machinery that has been in direct contact with the waste; and waste dumping areas.

8.K.4.2 Drained free liquids - aqueous wastes drained from waste containers (e.g., drums) prior to landfilling.

8.K.4.3 Landfill - an area of land or an excavation in which wastes are placed for permanent disposal, but that is not a land application or land treatment unit, surface impoundment, underground injection well, waste pile, salt dome formation, salt bed formation, underground mine, or cave as these terms are defined in NDEE Title 128, *Nebraska Hazardous Waste Regulations* (see also; 40 CFR Parts 257.2, 258.2, and 260.10).

8.K.4.4 Landfill wastewater - as defined in NDEE Title 119, Chapter 27, Part 007.28 (Landfills Point Source Category) (see 40 CFR Part 445), all wastewater associated with, or produced by, landfilling activities except for sanitary wastewater, non-contaminated storm water, contaminated ground water, and wastewater from recovery pumping wells. Landfill wastewater includes, but is not limited to, leachate, gas collection condensate, drained free liquids, laboratory derived wastewater, contaminated storm water, and contact wash water from washing truck, equipment, and railcar exteriors and surface areas that have come in direct contact with solid waste at the landfill facility.

8.K.4.5 Leachate - liquid that has passed through or emerged from solid waste and contains soluble, suspended, or miscible materials removed from such waste.

8.K.4.6 Non-contaminated storm water - storm water that does not come into direct contact with landfill wastes, the waste handling and treatment areas, or landfill wastewater as defined in Part 8.K.4.4. Non-contaminated storm water includes storm water that flows off the cap, cover, intermediate cover, daily cover, and/or final cover of the landfill.

8.K.5 Sector-Specific Benchmarks. (See also Part 6) Table 8.K-1 identifies benchmarks that apply to the specific subsectors of Sector K. These benchmarks apply to both your primary industrial activity and any co-located industrial activities.

Subsector (You may be subject to requirements for more than one sector/subsector)	Parameter	Benchmark Monitoring Concentration
Subsector K1. ALL - Industrial Activity Code “HZ”. Benchmarks only applicable to discharges not subject to effluent limitations in 40 CFR Part 445 Subpart A (see below).	Ammonia	2.14 mg/L
	Chemical Oxygen Demand (COD)	120.0 mg/L
	Total Arsenic	0.34 mg/L
	Total Cadmium ¹	Hardness Dependent
	Total Cyanide	0.0413 mg/ L
	Total Lead ¹	Hardness Dependent
	Total Mercury	0.0014 mg/ L
	Total Selenium	0.0031 mg/L
	Total Silver ¹	Hardness Dependent

¹ The benchmark values of some metals are dependent on water hardness. For these parameters, permittees must determine the hardness of the receiving water (see Appendix E, “Calculating Hardness in Receiving Waters for Hardness Dependent Metals,” for methodology), in accordance with Part 6.2.1.1, to identify the applicable ‘hardness range’ for determining their benchmark value applicable to their facility. The ranges occur in 25 mg/L increments. Hardness Dependent Hardness-based benchmarks follow Table 8.2-1 and the requirements in Appendix E.

8.K.6 Effluent Limitations Based on Effluent Limitations Guidelines. (See also 6.2.3) Table 8.K-2 identifies effluent limitations that apply to the industrial activities described below. Compliance with these effluent limitations is to be determined based on discharges from these industrial activities independent of commingling with any other waste streams that may be covered under this permit.

Industrial Activity	Parameter	Effluent Limitation
Discharges from hazardous waste landfills subject to effluent limitations in 40 CFR Part 445 Subpart A (see footnote).	Biochemical Oxygen Demand (BOD ₅)	220 mg/L, daily maximum
		56 mg/L, monthly average
	Total Suspended Solids (TSS)	88 mg/L, daily maximum
		27 mg/L, monthly average
	Ammonia	10 mg/L, daily maximum
		4.9 mg/L, monthly average
	Alpha Terpineol	0.042 mg/L, daily maximum
		0.019 mg/L, monthly average
	Aniline	0.024 mg/L, daily maximum
		0.015 mg/L, monthly average
	Benzoic Acid	0.119 mg/L, daily maximum
		0.073 mg/L, monthly average
	Naphthalene	0.059 mg/L, daily maximum
		0.022 mg/L, monthly average

Table continued on next page.

Industrial Activity	Parameter	Effluent Limitation
[Empty Cell]	p-Cresol	0.024 mg/L, daily maximum
		0.015 mg/L, monthly average
	Phenol	0.048 mg/L, daily maximum
		0.029 mg/L, monthly average
	Pyridine	0.072 mg/L, daily maximum
		0.025 mg/L, monthly average
	Total Arsenic	1.1 mg/L, daily maximum
		0.54 mg/L, monthly average
	Total Chromium	1.1 mg/L, daily maximum
		0.46 mg/L, monthly average
	Total Zinc	0.535 mg/L, daily maximum
		0.296 mg/L, monthly average
	pH	6.0 – 9.0 S.U.

¹ Monitor annually. As set forth at 40 CFR Part 445 Subpart A, these numeric limitations apply to contaminated storm water discharges from hazardous waste landfills subject to the provisions of RCRA Subtitle C at 40 CFR Parts 264 (Subpart N) and 265 (Subpart N) except for any of the following facilities:

- (a) landfills operated in conjunction with other industrial or commercial operations when the landfill receives only wastes generated by the industrial or commercial operation directly associated with the landfill;
- (b) landfills operated in conjunction with other industrial or commercial operations when the landfill receives wastes generated by the industrial or commercial operation directly associated with the landfill and also receives other wastes, provided that the other wastes received for disposal are generated by a facility that is subject to the same provisions in 40 CFR Subchapter N as the industrial or commercial operation or that the other wastes received are of similar nature to the wastes generated by the industrial or commercial operation;
- (c) landfills operated in conjunction with Centralized Waste Treatment (CWT) facilities subject to 40 CFR Part 437, so long as the CWT facility commingles the landfill wastewater with other non-landfill wastewater for discharge. A landfill directly associated with a CWT facility is subject to this part if the CWT facility discharges landfill wastewater separately from other CWT wastewater or commingles the wastewater from its landfill only with wastewater from other landfills; or
- (d) landfills operated in conjunction with other industrial or commercial operations when the landfill receives wastes from public service activities, so long as the company owning the landfill does not receive a fee or other remuneration for the disposal service.

8.L Sector L – Landfills, Land Application Sites, and Open Dumps

8.L.1 Covered Storm Water Discharges. The requirements in Subpart L apply to storm water discharges associated with industrial activity from Landfills, Land Application Sites, and Open Dumps as identified by the Activity Code specified under Sector L in Table D-1 of Appendix D of the permit.

8.L.2 Industrial Activities Covered by Sector L. This permit may authorize storm water discharges for Sector L facilities associated with waste disposal at landfills, land application sites that receive or have received industrial waste, including sites subject to regulation under Subtitle D of RCRA. This permit does not cover discharges from landfills that receive only municipal wastes.

8.L.3 Limitations on Coverage.

8.L.3.1 Prohibition of Non-Storm Water Discharges. (See also Part 1.1.4) The following discharges are not authorized by this permit: leachate, gas collection condensate, drained free liquids, contaminated ground water, laboratory wastewater, and contact wash water from washing truck and railcar exteriors and surface areas that have come in direct contact with solid waste at the landfill facility. Storm water discharges from open dumps as defined under RCRA are also not authorized under this permit.

8.L.4 Definitions.

8.L.4.1 Contaminated storm water - storm water that comes into direct contact with landfill wastes, the waste handling and treatment areas, or landfill wastewater. Some areas of a landfill that may produce contaminated storm water include (but are not limited to) the open face of an active landfill with exposed waste (no cover added); the areas around wastewater treatment operations; trucks, equipment, or machinery that has been in direct contact with the waste; and waste dumping areas.

8.L.4.2 Drained free liquids - aqueous wastes drained from waste containers (e.g., drums) prior to landfilling.

8.L.4.3 Landfill wastewater - as defined in NDEE Title 119, Chapter 27, Part 007.28 (Landfills Point Source Category) (see 40 CFR Part 445) all wastewater associated with, or produced by, landfilling activities except for sanitary wastewater, non-contaminated storm water, contaminated ground water, and wastewater from recovery pumping wells. Landfill process wastewater includes, but is not limited to, leachate; gas collection condensate; drained free liquids; laboratory-derived wastewater; contaminated storm water; and contact wash water from washing truck, equipment, and railcar exteriors and surface areas that have come in direct contact with solid waste at the landfill facility.

8.L.4.4 Leachate - liquid that has passed through or emerged from solid waste and contains soluble, suspended, or miscible materials removed from such waste.

8.L.4.5 Non-contaminated storm water - storm water that does not come into direct contact with landfill wastes, the waste handling and treatment areas, or landfill wastewater. Non-contaminated storm water includes storm water that flows off the cap, cover, intermediate cover, daily cover, and/or final cover of the landfill.

8.L.5 Additional Technology-Based Effluent Limits.

8.L.5.1 Preventive Maintenance Program. (See also Part 2.1.2.3) As part of your preventive maintenance program, maintain the following: all elements of leachate collection and treatment systems, to prevent commingling of leachate with storm water; the integrity and effectiveness of any intermediate or final cover (including repairing the cover as necessary), to minimize the effects of settlement, sinking, and erosion.

8.L.5.2 Erosion and Sedimentation Control. (See also Part 2.1.2.5) Provide temporary stabilization (e.g., temporary seeding, mulching, and placing geotextiles on the inactive portions of stockpiles) for the following: materials stockpiled for daily, intermediate, and final cover; inactive areas of the landfill or open dump; landfills or open dump areas that have gotten final covers but where vegetation has yet to establish itself; and land application sites where waste application has been completed but final vegetation has not yet been established.

8.L.5.3 Unauthorized Discharge Test Certification. (See also Part 5.1.3.4) The discharge test and certification must also be conducted for the presence of leachate and vehicle wash water.

8.L.6 Additional SWPPP Requirements.

8.L.5.1 Drainage Area Site Map. (See also Part 5.1.2) Document in your SWPPP where any of the following may be exposed to precipitation or surface runoff: active and closed landfill cells or trenches, active and closed land application areas, locations where open dumping is occurring or has occurred, locations of any known leachate springs or other areas where uncontrolled leachate may commingle with runoff, and leachate collection and handling systems.

8.L.5.2 Summary of Potential Pollutant Sources. (See also Part 5.1.3) Document in your SWPPP the following sources and activities that have potential pollutants associated with them: fertilizer, herbicide, and pesticide application; earth and soil moving; waste hauling and loading or unloading; outdoor storage of significant materials, including daily, interim, and final cover material stockpiles as well as temporary waste storage areas; exposure of active and inactive landfill and land application areas; uncontrolled leachate flows; and failure or leaks from leachate collection and treatment systems.

8.L.7 Additional Inspection Requirements. (See also Part 4)

8.L.7.1 Inspections of Active Sites. Except in semi-arid climates, inspect operating landfills, open dumps, and land application sites at least once every 7 days. Focus on areas of landfills that have not yet been finally stabilized; active land application areas, areas used for storage of material and wastes that are exposed to precipitation, stabilization, and structural control measures; leachate collection and treatment systems; and locations where equipment and waste trucks enter and exit the site. Ensure that sediment and erosion control measures are operating properly. For stabilized sites and areas where land application has been completed, or where the climate is semi-arid, conduct inspections at least once every month.

8.L.7.2 Inspections of Inactive Sites. Inspect inactive landfills, open dumps, and land application sites at least quarterly. Qualified personnel must inspect landfill (or open dump) stabilization and structural erosion control measures, leachate collection and treatment systems, and all closed land application areas.

8.L.8 Additional Post-Authorization Documentation Requirements.

8.L.8.1 Recordkeeping and Internal Reporting. Keep records with your SWPPP of the types of wastes disposed of in each cell or trench of a landfill or open dump. For land application sites, track the types and quantities of wastes applied in specific areas.

8.L.9 Sector-Specific Benchmarks. (See also Part 6) Table 8.L-1 identifies benchmarks that apply to the specific subsectors of Sector L. These benchmarks apply to both your primary industrial activity and any co-located industrial activities.

Table 8.L-1		
Subsector (You may be subject to requirements for more than one sector/subsector)	Parameter	Benchmark Monitoring Concentration
Subsector L1. All Landfill, Land Application Sites and Open Dumps (Industrial Activity Code “LF”)	Total Suspended Solids (TSS)	100 mg/L

¹Benchmark monitoring required only for discharges not subject to effluent limitations in 40 CFR Part 445 Subpart B (see Table L-2 below).

8.L.10. Effluent Limitations Based on Effluent Limitations Guidelines. (See also 6.2.3) Table 8.L-2 identifies effluent limitations that apply to the industrial activities described below. Compliance with these effluent limitations is to be determined based on discharges from these industrial activities independent of commingling with any other waste streams that may be covered under this permit.

Table 8.L-2¹		
Industrial Activity	Parameter	Effluent Limitation
Discharges from non-hazardous waste landfills subject to effluent limitations in 40 CFR Part 445 Subpart B (see footnote).	Biochemical Oxygen Demand (BOD ₅)	140 mg/L, daily maximum
		37 mg/L, monthly average
	Total Suspended Solids (TSS)	88 mg/L, daily maximum
		27 mg/L, monthly average
	Ammonia	10 mg/L, daily maximum
		4.9 mg/L, monthly average
	Alpha Terpineol	0.033 mg/L, daily maximum
		0.016 mg/L, monthly average
	Benzoic Acid	0.12 mg/L, daily maximum
		0.071 mg/L, monthly average
	p-Cresol	0.025 mg/L, daily maximum
		0.014 mg/L, monthly average
	Phenol	0.026 mg/L, daily maximum
		0.015 mg/L, monthly average
Total Zinc	0.20 mg/L, daily maximum	
	0.11mg/L, monthly average	
pH	6.0 – 9.0 S.U.	

¹ Monitor annually. As set forth at 40 CFR Part 445 Subpart B, these numeric limitations apply to contaminated storm water discharges from MSWLFs that have not been closed in accordance with 40 CFR Part 258.60, and to contaminated storm water discharges from those landfills that are subject to the provisions of 40 CFR Part 257 except for discharges from any of the following facilities:

- (a) landfills operated in conjunction with other industrial or commercial operations, when the landfill receives only wastes generated by the industrial or commercial operation directly associated with the landfill;
- (b) landfills operated in conjunction with other industrial or commercial operations when the landfill receives wastes generated by the industrial or commercial operation directly associated with the landfill and also receives other wastes,

Continued on next page.

provided that the other wastes received for disposal are generated by a facility that is subject to the same provisions in 40 CFR Subchapter N as the industrial or commercial operation or that the other wastes received are of similar nature to the wastes generated by the industrial or commercial operation;

(c) landfills operated in conjunction with CWT facilities subject to 40 CFR Part 437, so long as the CWT facility commingles the landfill wastewater with other non-landfill wastewater for discharge. A landfill directly associated with a CWT facility is subject to this part if the CWT facility discharges landfill wastewater separately from other CWT wastewater or commingles the wastewater from its landfill only with wastewater from other landfills; or

(d) landfills operated in conjunction with other industrial or commercial operations when the landfill receives wastes from public service activities, so long as the company owning the landfill does not receive a fee or other remuneration for the disposal service.

8.M Sector M – Automobile Salvage Yards

8.M.1 Covered Storm Water Discharges. The requirements in Subpart M apply to storm water discharges associated with industrial activity from Automobile Salvage Yards as identified by the SIC Code specified under Sector M in Table D-1 of Appendix D of this permit.

8.M.2 Additional Technology-Based Effluent Limits.

8.M.2.1 Spill and Leak Prevention Procedures. (See also Part 2.1.2.4) Drain vehicles intended to be dismantled of all fluids upon arrival at the site (or as soon thereafter as practicable), or employ some other equivalent means to prevent spills and leaks.

8.M.2.2 Employee Training. (See also Part 2.1.2.9) If applicable to your facility, address the following areas (at a minimum) in your employee training program: proper handling (collection, storage, and disposal) of oil, used mineral spirits, anti-freeze, mercury switches, and solvents.

8.M.2.3 Management of Runoff. (See also Part 2.1.2.6) Implement control measures to minimize discharges of pollutants in runoff such as the following, where determined feasible (list not exclusive): berms or drainage ditches on the property line (to help prevent run-on from neighboring properties); berms for uncovered outdoor storage of oily parts, engine blocks, and above-ground liquid storage; installation of detention ponds; and installation of filtering devices and oil and water separators.

8.M.3 Additional SWPPP Requirements.

8.M.3.1 Drainage Area Site Map. (See also Part 5.1.2) Identify locations used for dismantling, storing, and maintaining used motor vehicle parts. Also identify where any of the following may be exposed to precipitation or surface runoff: dismantling areas, parts (e.g., engine blocks, tires, hub caps, batteries, hoods, mufflers) storage areas, and liquid storage tanks and drums for fuel and other fluids.

8.M.3.2 Potential Pollutant Sources. (See also Part 5.1.3) Assess the potential for the following to contribute pollutants to storm water discharges: vehicle storage areas, dismantling areas, parts storage areas (e.g., engine blocks, tires, hub caps, batteries, hoods, mufflers), and fueling stations.

8.M.4 Additional Inspection Requirements. (See also Part 4.1) Immediately (or as soon thereafter as practicable) inspect vehicles arriving at the site for leaks. Inspect quarterly for signs of leakage: all equipment containing oily parts, hydraulic fluids, any other types of fluids, or mercury switches. Also, inspect quarterly for signs of leakage: all vessels and areas where hazardous materials and general automotive fluids are stored, including, but not limited to, mercury switches, brake fluid, transmission fluid, radiator water, and antifreeze.

8.M.5 Sector-Specific Benchmarks. (See also Part 6) Table 8.M-1 identifies benchmarks that apply to Sector M. These benchmarks apply to both your primary industrial activity and any co-located industrial activities.

Table 8.M-1		
Subsector (You may be subject to requirements for more than one sector/subsector)	Parameter	Benchmark Monitoring Concentration
Subsector M1. Automobile Salvage Yards (SIC 5015)	Total Suspended Solids (TSS)	100 mg/L
	Total Aluminum	0.75 mg/ L
	Total Lead ¹	Hardness Dependent

¹ The benchmark values of some metals are dependent on water hardness. For these parameters, permittees must determine the hardness of the receiving water (see Appendix E, “Calculating Hardness in Receiving Waters for Hardness Dependent Metals,” for methodology), in accordance with Part 6.2.1.1, to identify the applicable ‘hardness range’ for determining their benchmark value applicable to their facility. The ranges occur in 25 mg/L increments. Hardness Dependent Hardness-based benchmarks follow Table 8.2-1 and the requirements in Appendix E.

8.N Sector N – Scrap Recycling and Waste Recycling Facilities

8.N.1 Covered Storm Water Discharges. The requirements in Subpart N apply to storm water discharges associated with industrial activity from Scrap Recycling and Waste Recycling facilities as identified by the SIC Code specified under Sector N in Table D-1 of Appendix D of the permit.

8.N.2 Limitation on Coverage. Separate permit requirements have been established for recycling facilities that only receive, process, and do wholesale distribution of only source-separated recyclable materials primarily from non-industrial and residential sources (i.e., common consumer products including paper, newspaper, glass, cardboard, plastic containers, and aluminum and tin cans). This includes recycling facilities commonly referred to as material recovery facilities (MRF) (see Part 8.N.3.3).

8.N.2.1 Prohibition of Non-Storm Water Discharges. (See also Part 1.1.4) Non-storm water discharges from turnings containment areas are not covered by this permit (see also Part 8.N.3.1.3). Discharges from containment areas in the absence of a storm event are prohibited unless covered by a separate NPDES permit.

8.N.3 Additional Technology-Based Effluent Limits.

8.N.3.1 Scrap and Waste Recycling Facilities (Non-Source Separated, Nonliquid Recyclable Materials). The following requirements are for facilities that receive, process, and do wholesale distribution of nonliquid recyclable wastes (e.g., ferrous and nonferrous metals, plastics, glass, cardboard, and paper). These facilities may receive both nonrecyclable and recyclable materials. This section is not intended for those facilities that accept recyclables only from primarily non-industrial and residential sources.

8.N.3.1.1 Inbound Recyclable and Waste Material Control Program. Minimize the chance of accepting materials that could be significant sources of pollutants by conducting inspections of inbound recyclables and waste materials. Also through implementation of control measures such as the following, where determined feasible (list not exclusive): providing information and education to suppliers of scrap and recyclable waste materials on draining and properly disposing of residual fluids (e.g., from vehicles and equipment engines, radiators and transmissions, oil filled transformers, and individual containers or drums), and removal of mercury switches from vehicles before delivery to your facility; establishing procedures to minimize the potential of any residual fluids from coming into contact with precipitation or runoff; establishing procedures for accepting scrap lead-acid batteries (additional requirements for the handling, storage, and disposal or recycling of batteries are contained in the scrap lead-acid battery program provisions in Part 8.N.3.1.6); providing training targeted for those personnel engaged in the inspection and acceptance of inbound recyclable materials; and establishing procedures to ensure that liquid wastes, including used oil, are stored in materially compatible and non-leaking containers and are disposed of or recycled in accordance with RCRA.

8.N.3.1.2 Scrap and Waste Material Stockpiles and Storage (Outdoor). Minimize contact of storm water runoff with stockpiled materials, processed materials, and nonrecyclable wastes through implementation of control measures such as the following, where determined feasible (list not exclusive): permanent or semi-permanent covers; sediment traps, vegetated swales and strips, catch basin filters, and sand filters to facilitate settling or filtering of pollutants; dikes, berms, containment trenches, culverts, and surface grading to divert runoff from storage areas; and oil and water separators, sumps, and dry absorbents for areas where potential sources of residual fluids are stockpiled (e.g., automobile engine storage areas).

8.N.3.1.3 Stockpiling of Turnings Exposed to Cutting Fluids (Outdoor Storage).

Minimize contact of surface runoff with residual cutting fluids by storing all turnings exposed to cutting fluids under some form of permanent or semi-permanent cover, or establishing dedicated containment areas for all turnings that have been exposed to cutting fluids. Any containment areas must be constructed of concrete, asphalt, or other equivalent types of impermeable material and include a barrier (e.g., berms, curbing, elevated pads) to prevent contact with storm water run-on. Storm water runoff from these areas can be discharged, provided that any runoff is first collected and treated by an oil and water separator or its equivalent. You must regularly maintain the oil and water separator (or its equivalent) and properly dispose of or recycle collected residual fluids.

8.N.3.1.4 Scrap and Waste Material Stockpiles and Storage (Covered or Indoor Storage).

Minimize contact of residual liquids and particulate matter from materials stored indoors or under cover with surface runoff through implementation of control measures such as the following, where determined feasible (list not exclusive): good housekeeping measures, including the use of dry absorbents or wet vacuuming to contain, dispose of, or recycle residual liquids originating from recyclable containers, and mercury spill kits for spills from storage of mercury switches; not allowing wash water from tipping floors or other processing areas to discharge to the storm sewer system; and disconnecting or sealing off all floor drains connected to the storm sewer system.

8.N.3.1.5 Scrap and Recyclable Waste Processing Areas. Minimize surface runoff from coming in contact with scrap processing equipment. Pay attention to operations that generate visible amounts of particulate residue (e.g., shredding) to minimize the contact of accumulated particulate matter and residual fluids with runoff (i.e., through good housekeeping, preventive maintenance, etc.). To minimize discharges of pollutants in storm water from scrap and recyclable waste processing areas, implement control measures such as the following, where determined to be feasible (list not exclusive): regularly inspecting equipment for spills or leaks and malfunctioning, worn, or corroded parts or equipment; establishing a preventive maintenance program for processing equipment; using dry-absorbents or other cleanup practices to collect and dispose of or recycle spilled or leaking fluids or use mercury spill kits for spills from storage of mercury switches; on unattended hydraulic reservoirs over 150 gallons in capacity, install protection devices such as low-level alarms or equivalent devices, or secondary containment that can hold the entire volume of the reservoir; implementing containment or diversion structures such as dikes, berms, culverts, trenches, elevated concrete pads, and grading to minimize contact of storm water runoff with outdoor processing equipment or stored materials; using oil and water separators or sumps; installing permanent or semi-permanent covers in processing areas where there are residual fluids and grease; and using retention or detention ponds or basins, sediment traps, vegetated swales or strips, and/or catch basin filters or sand filters for pollutant settling and filtration.

8.N.3.1.6 Scrap Lead-Acid Battery Program. To minimize the discharge of pollutants in storm water from lead-acid batteries properly handle, store, and dispose of scrap lead-acid batteries, and implement control measures such as the following, where determined to be feasible (list not exclusive): segregating scrap lead-acid batteries from other scrap materials; properly handling, storing, and disposing of cracked or broken batteries; collecting and disposing of leaking lead-acid battery fluid; minimizing or eliminating (if possible) exposure of scrap lead-acid batteries to precipitation or runoff; and providing employee training for the management of scrap batteries.

8.N.3.1.7 Spill Prevention and Response Procedures. (See also Part 2.1.2.4) Install alarms and/or pump shutoff systems on outdoor equipment with hydraulic reservoirs

exceeding 150 gallons in the event of a line break. Alternatively, a secondary containment system capable of holding the entire contents of the reservoir plus room for precipitation can be used. Use a mercury spill kit for any release of mercury from switches, anti-lock brake systems, and switch storage areas.

8.N.3.1.8 Supplier Notification Program. As appropriate, notify major suppliers which scrap materials will not be accepted at the facility or will be accepted only under certain conditions.

8.N.3.2 Waste Recycling Facilities (Liquid Recyclable Materials).

8.N.3.2.1 Waste Material Storage (Indoor). Minimize or eliminate contact between residual liquids from waste materials stored indoors and from surface runoff. The plan may refer to applicable portions of other existing plans, such as Spill Prevention, Control, and Countermeasure (SPCC) plans required under 40 CFR Part 112. To minimize discharges of pollutants in storm water from indoor waste material storage areas, implement control measures such as the following, where determined to be feasible (list not exclusive): implementing procedures for material handling (including labeling and marking); cleaning up spills and leaks with dry absorbent materials and/or a wet vacuum system; installing appropriate containment structures (trenching, curbing, gutters, etc.); and installing a drainage system, including appurtenances (e.g., pumps or ejectors, manually operated valves), to handle discharges from diked or bermed areas. Drainage should be discharged to an appropriate treatment facility or sanitary sewer system, or otherwise disposed of properly. These discharges may require coverage under a separate NPDES wastewater permit or industrial user permit under the pretreatment program.

8.N.3.2.2 Waste Material Storage (Outdoor). Minimize contact between stored residual liquids and precipitation or runoff. The plan may refer to applicable portions of other existing plans, such as SPCC plans required under 40 CFR Part 112. Discharges of storm water from containment areas containing used oil must also be in accordance with applicable sections of 40 CFR Part 112. To minimize discharges of pollutants in storm water from outdoor waste material storage areas, implement control measures such as the following, where determined to be feasible (list not exclusive): installing appropriate containment structures (e.g., dikes, berms, curbing, pits) to store the volume of the largest tank, with sufficient extra capacity for precipitation; installing drainage control and other diversionary structures; installing corrosion protection and/or leak detection systems for storage tanks; and using dry-absorbent materials and/or a wet vacuum system to collect spills.

8.N.3.2.3 Trucks and Rail Car Waste Transfer Areas. Minimize pollutants in discharges from truck and rail car loading and unloading areas. Include measures to clean up minor spills and leaks resulting from the transfer of liquid wastes. To minimize discharges of pollutants in storm water from truck and rail car waste transfer areas, implement control measures such as the following, where determined to be feasible (list not exclusive): installing containment and diversionary structures to minimize contact with precipitation or runoff; and using dry clean-up methods, wet vacuuming, roof coverings, and/or runoff controls.

8.N.3.3 Recycling Facilities (Source-Separated Materials). The following identifies considerations for facilities that receive only source-separated recyclables, primarily from non-industrial and residential sources.

8.N.3.3.1 Inbound Recyclable Material Control. Minimize the chance of accepting nonrecyclables (e.g., hazardous materials) that could be a significant source of pollutants by conducting inspections of inbound materials. Also through the implementation of control measures such as the following, where determined to be feasible (list not

exclusive): providing information and education measures to inform suppliers of recyclables about acceptable and non-acceptable materials; training drivers responsible for pickup of recycled material; clearly marking public drop-off containers regarding which materials can be accepted; rejecting nonrecyclable wastes or household hazardous wastes at the source; and establishing procedures for handling and disposal of nonrecyclable material.

8.N.3.3.2 Outdoor Storage. Minimize exposure of recyclables to precipitation and runoff by using good housekeeping measures to prevent accumulation of particulate matter and fluids, particularly in high traffic areas. Also through implementation of control measure such as the following, where determined to be feasible (list not exclusive): providing totally enclosed drop-off containers for the public; installing a sump and pump with each container pit and treat or discharge collected fluids to a sanitary sewer system; providing dikes and curbs for secondary containment (e.g., around bales of recyclable waste paper); diverting surface water runoff away from outside material storage areas; providing covers over containment bins, dumpsters, and roll-off boxes; and storing the equivalent of one day's volume of recyclable material indoors.

8.N.3.3.3 Indoor Storage and Material Processing. Minimize the release of pollutants from indoor storage and processing areas through implementation of control measures such as the following, where determined to be feasible (list not exclusive): scheduling routine good housekeeping measures for all storage and processing areas; prohibiting tipping floor wash water from draining to the storm sewer system; and providing employee training on pollution prevention practices.

8.N.3.3.4 Vehicle and Equipment Maintenance. Minimize the discharge of pollutants in storm water from areas where vehicle and equipment maintenance occur outdoors through implementation of control measures such as the following, where determined to be feasible (list not exclusive): prohibit vehicle and equipment wash water from discharging to the storm sewer system; minimizing or eliminating outdoor maintenance areas; establishing spill prevention and clean-up procedures in fueling areas; avoiding topping off fuel tanks; diverting runoff from fueling areas; storing lubricants and hydraulic fluids indoors; and providing employee training on proper handling and storage of hydraulic fluids and lubricants.

8.N.4 Additional SWPPP Requirements.

8.N.4.1 Drainage Area Site Map. (See also Part 5.1.2) Document in your SWPPP the locations of any of the following activities or sources that may be exposed to precipitation or surface runoff: scrap and waste material storage; outdoor scrap and waste processing equipment; and containment areas for turnings exposed to cutting fluids.

8.N.4.2 Maintenance Schedules/Procedures for Collection, Handling, and Disposal or Recycling of Residual Fluids at Scrap and Waste Recycling Facilities. If you are subject to Part 8.N.3.1.3, your SWPPP must identify any applicable maintenance schedule and the procedures to collect, handle, and dispose of or recycle residual fluids.

8.N.5 Additional Inspection Requirements.

8.N.5.1 Inspections for Waste Recycling Facilities. The inspections must be performed quarterly, pursuant to Part 4.1, and include, at a minimum, all areas where waste is generated, received, stored, treated, or disposed of and that are exposed to either precipitation or storm water runoff.

8.N.6 Sector-Specific Benchmarks. (See also Part 6) Table 8.N-1 identifies benchmarks that apply to Sector N. These benchmarks apply to both your primary industrial activity and any co-located industrial activities.

Table 8.N-1		
Subsector (You may be subject to requirements for more than one sector/subsector)	Parameter	Benchmark Monitoring Concentration
Subsector N1. Scrap Recycling and Waste Recycling Facilities except those only receiving source-separated recyclable materials primarily from non-industrial and residential sources (SIC 5093)	Chemical Oxygen Demand (COD)	120.0 mg/L
	Total Suspended Solids (TSS)	100 mg/L
	Total Aluminum	0.75 mg/ L
	Total Copper	Hardness Dependent
	Total Lead ¹	Hardness Dependent
	Total Recoverable Zinc ¹	Hardness Dependent

¹ The benchmark values of some metals are dependent on water hardness. For these parameters, permittees must determine the hardness of the receiving water (see Appendix E, “Calculating Hardness in Receiving Waters for Hardness Dependent Metals,” for methodology), in accordance with Part 6.2.1.1, to identify the applicable ‘hardness range’ for determining their benchmark value applicable to their facility. The ranges occur in 25 mg/L increments. Hardness Dependent Hardness-based benchmarks follow Table 8.2-1 and the requirements in Appendix E.

8.O Sector O – Steam Electric Generating Facilities

8.O.1 Covered Storm Water Discharges. The requirements in Subpart O apply to storm water discharges associated with industrial activity from Steam Electric Power Generating Facilities as identified by the Activity Code specified under Sector O in Table D-1 of Appendix D.

8.O.2 Industrial Activities Covered by Sector O. This permit authorizes storm water discharges from the following industrial activities at Sector O facilities:

8.O.2.1 Steam electric power generation using coal, natural gas, oil, nuclear energy, etc., to produce a steam source, including coal handling areas (does not include geothermal power);

8.O.2.2 Coal pile runoff, including effluent limitations established at NDEE Title 119, Chapter 27, Part 007.51 (see 40 CFR Part 423); and

8.O.2.2 Dual fuel facilities that could employ a steam boiler.

8.O.3 Limitations on Coverage.

8.O.3.1 Prohibition of Non-Storm Water Discharges. Non-storm water discharges subject to effluent limitations guidelines are not covered by this permit.

8.O.3.2 Prohibition of Storm Water Discharges. Storm water discharges from the following are not covered by this permit:

8.O.3.2.1 Ancillary facilities (e.g., fleet centers and substations) that are not contiguous to a steam electric power generating facility;

8.O.3.2.2 Gas turbine facilities (providing the facility is not a dual-fuel facility that includes a steam boiler), and combined-cycle facilities where no supplemental fuel oil is burned (and the facility is not a dual-fuel facility that includes a steam boiler); and

8.O.3.2.3 Cogeneration (combined heat and power) facilities utilizing a gas turbine.

8.O.4 Additional Technology-Based Effluent Limits. The following good housekeeping measures are required in addition to Part 2.1.2.2:

8.O.4.1 Fugitive Dust Emissions. Minimize fugitive dust emissions from coal handling areas to minimize the tracking of coal dust offsite that could be discharged in storm water through implementation of control measures such as the following, where determined feasible (list not exclusive): installing specially designed tires; and washing vehicles in a designated area before they leave the site and controlling the wash water.

8.O.4.2 Delivery Vehicles. Minimize contamination of storm water runoff from delivery vehicles arriving at the plant site. Implement procedures to inspect delivery vehicles arriving at the plant site as necessary to minimize discharges of pollutants in storm water. Ensure the overall integrity of the body or container of the delivery vehicle and implement procedures to deal with leakage or spillage from delivery vehicles or containers.

8.O.4.3 Fuel Oil Unloading Areas. Minimize contamination of precipitation or surface runoff from fuel oil unloading areas. Use containment curbs in unloading areas where feasible. In addition, ensure personnel familiar with spill prevention and response procedures are available to respond expeditiously in the event of a leak or spill during deliveries. Ensure that any leaks or spills are immediately contained and cleaned up, and using spill and overflow protection devices (e.g., drip pans, drip diapers, or other containment devices placed beneath fuel oil connectors to contain potential spillage during deliveries or from leaks at the connectors).

8.O.4.4 Chemical Loading and Unloading. Minimize contamination of precipitation or surface runoff from chemical loading and unloading areas. Use containment curbs at chemical loading and unloading areas to contain spills, where practicable. In addition, ensure personnel familiar

with spill prevention and response are available to respond expeditiously in the event of a leak or spill during deliveries. Ensure that any leaks or spills are immediately contained and cleaned up; and where practicable, load and unload in covered areas and store chemicals indoors.

8.O.4.5 Miscellaneous Loading and Unloading Areas. Minimize contamination of precipitation or surface runoff from loading and unloading areas through implementation of control measures such as the following, where determined to be feasible (list not exclusive): covering the loading area; grading, berming, or curbing around the loading area to divert run-on; locating the loading and unloading equipment and vehicles so that leaks are contained in existing containment and flow diversion systems; or equivalent procedures.

8.O.4.6 Liquid Storage Tanks. Minimize contamination of surface runoff from above-ground liquid storage tanks through implementation of control measures such as the following, where determined to be feasible (list not exclusive): using protective guards around tanks; using containment curbs; installing spill and overflow protection; using dry cleanup methods; or equivalent measures.

8.O.4.7 Large Bulk Fuel Storage Tanks. Minimize contamination of surface runoff from large bulk fuel storage tanks by using containment berms (or their equivalent). You must also comply with applicable State and Federal laws, including SPCC Plan requirements.

8.O.4.8 Spill Reduction Measures. Minimize the potential for an oil or chemical spill, or reference the appropriate part of your SPCC plan. Visually inspect as part of your routine facility inspection the structural integrity of all above-ground tanks, pipelines, pumps, and related equipment that may be exposed to storm water, and make any necessary repairs immediately.

8.O.4.9 Oil-Bearing Equipment in Switchyards. Minimize contamination of surface runoff from oil-bearing equipment in switchyard areas. Use level grades and gravel surfaces to retard flows and limit the spread of spills, or collect runoff in perimeter ditches.

8.O.4.10 Residue-Hauling Vehicles. Inspect all residue-hauling vehicles for proper covering over the load, adequate gate sealing, and overall integrity of the container body. Repair vehicles without load covering or adequate gate sealing, or with leaking containers or beds.

8.O.4.11 Ash Loading Areas. Reduce or control the tracking of ash and residue from ash loading areas. Clear the ash building floor and immediately adjacent roadways of spillage, debris, and excess water as necessary to minimize discharges of pollutants in storm water.

8.O.4.12 Areas Adjacent to Disposal Ponds or Landfills. Minimize contamination of surface runoff from areas adjacent to disposal ponds or landfills. Reduce ash residue that may be tracked on to access roads traveled by residue handling vehicles, and reduce ash residue on exit roads leading into and out of residue handling areas.

8.O.4.13 Landfills, Scrap yards, Surface Impoundments, Open Dumps, General Refuse Sites. Minimize the potential for contamination of runoff from these areas.

8.O.5 Additional SWPPP Requirements.

8.O.5.1 Drainage Area Site Map. (See also Part 5.1.2) Document in your SWPPP the locations of any of the following activities or sources that may be exposed to precipitation or surface runoff: storage tanks, scrap yards, and general refuse areas; short- and long-term storage of general materials (including but not limited to supplies, construction materials, paint equipment, oils, fuels, used and unused solvents, cleaning materials, paint, water treatment chemicals, fertilizer, and pesticides); landfills and construction sites; and stock pile areas (e.g., coal or limestone piles).

8.O.5.2 Documentation of Good Housekeeping Measures. You must document in your SWPPP the good housekeeping measures implemented to meet the effluent limits in Part 8.O.4.

8.O.6 Additional Inspection Requirements. (See also Part 4.1) As part of your inspection, inspect the following areas monthly: coal handling areas, loading or unloading areas, switchyards, fueling areas, bulk storage areas, ash handling areas, areas adjacent to disposal ponds and landfills, maintenance areas, liquid storage tanks, and long term and short term material storage areas.

8.O.7 Effluent Limitations Based on Effluent Limitations Guidelines. (See also 6.2.3) Table 8.O-1 identifies effluent limitations that apply to the industrial activities described below. Compliance with these effluent limitations is to be determined based on discharges from these industrial activities independent of commingling with any other waste streams that may be covered under this permit.

Table 8.O-1		
Industrial Activity	Parameter	Effluent Limitation
Discharges from coal storage piles at Steam Electric Generating Facilities	Total Suspended Solids (TSS)	50.0 mg/L ¹
	pH	6.0 – 9.0 S.U. ¹

¹ Any untreated overflow from facilities designed, constructed, and operated to treat the volume of coal pile runoff that is associated with a 10-year, 24-hour rainfall event shall not be subject to the TSS limitations.

8.P Sector P – Land Transportation and Warehousing

8.P.1 Covered Storm Water Discharges. The requirements in Subpart P apply to storm water discharges associated with industrial activity from Land Transportation and Warehousing facilities as identified by the SIC Codes specified under Sector P in Table D-1 of Appendix D of the permit.

8.P.2 Limitation on Coverage.

8.P.2.1 Prohibited Discharges (see also Parts 1.1.4 and 8.P.3.1.4) This permit does not authorize the discharge of vehicle/equipment/surface wash water, including tank cleaning operations. Such discharges must be authorized under a separate NPDES permit, discharged to a sanitary sewer in accordance with applicable industrial pretreatment requirements, or recycled on-site.

8.P.3 Additional Technology-Based Effluent Limits.

8.P.3.1 Good Housekeeping Measures. (See also Part 2.1.2.2) In addition to the Good Housekeeping requirements in Part 2.1.2.2, you must do the following:

8.P.3.1.1 Vehicle and Equipment Storage Areas. Minimize the potential for storm water exposure to leaky or leak-prone vehicles/equipment awaiting maintenance through implementation of control measures such as the following, where determined to be feasible (list not exclusive): using drip pans under vehicles/equipment; storing vehicles and equipment indoors; installing berms or dikes; using absorbents; roofing or covering storage areas; and cleaning pavement surfaces to remove oil and grease.

8.P.3.1.2 Fueling Areas. Minimize contamination of storm water runoff from fueling areas through implementation of control measures such as the following, where determined to be feasible (list not exclusive): covering the fueling area; using spill/overflow protection and cleanup equipment; minimizing storm water run-on/runoff to the fueling area; using dry cleanup methods; and treating and/or recycling collected storm water runoff.

8.P.3.1.3 Material Storage Areas. Maintain all material storage vessels (e.g., for used oil/oil filters, spent solvents, paint wastes, hydraulic fluids) to prevent contamination of storm water and plainly label them (e.g., “Used Oil,” “Spent Solvents,” etc.). To minimize discharges of pollutants in storm water from material storage areas, implement control measures such as the following, where determined to be feasible (list not exclusive): storing the materials indoors; installing berms/dikes around the areas; minimizing runoff of storm water to the areas; using dry cleanup methods; and treating and/or recycling collected storm water runoff.

8.P.3.1.4 Vehicle and Equipment Cleaning Areas. Minimize contamination of storm water runoff from all areas used for vehicle/equipment cleaning through implementation of control measures such as the following, where determined to be feasible (list not exclusive): performing all cleaning operations indoors; covering the cleaning operation; ensuring that all wash water drains to a proper collection system (i.e., not the storm water drainage system); treating and/or recycling collected wash water; or other equivalent measures. Discharges of vehicle and equipment wash water, including tank cleaning operations, are not authorized by this permit for this sector.

8.P.3.1.5 Vehicle and Equipment Maintenance Areas. Minimize contamination of storm water runoff from all areas used for vehicle/equipment maintenance through implementation of control measures such as the following, where determined to be feasible (list not exclusive): performing maintenance activities indoors; using drip pans; keeping an organized inventory of materials used in the shop; draining all parts of fluid prior to disposal; prohibiting wet clean up practices if these practices would result in the discharge of pollutants to storm water drainage systems; using dry cleanup methods;

treating and/or recycling collected storm water runoff; and minimizing run-on/runoff of storm water to maintenance areas.

8.P.3.1.6 Locomotive Sanding (Loading Sand for Traction) Areas. Minimize discharges of pollutants in storm water from locomotive sanding areas through implementation of control measures such as the following, where determined to be feasible (list not exclusive): covering sanding areas; minimizing storm water run-on/runoff; or appropriate sediment removal practices to minimize the offsite transport of sanding material by storm water.

8.P.3.2 Employee Training. (See also Part 2.1.2.9) Train personnel at least once a year and address the following activities, as applicable: used oil and spent solvent management; fueling procedures; general good housekeeping practices; proper painting procedures; and used battery management.

8.P.4 Additional SWPPP Requirements.

8.P.4.1 Drainage Area Site Map. (See also Part 5.1.2) Identify in the SWPPP the following areas of the facility and indicate whether activities occurring there may be exposed to precipitation/surface runoff: fueling stations; vehicle/equipment maintenance or cleaning areas; storage areas for vehicle/equipment with actual or potential fluid leaks; loading/unloading areas; areas where treatment, storage or disposal of wastes occur; liquid storage tanks; processing areas; and storage areas.

8.P.4.2 Potential Pollutant Sources. (See also Part 5.1.3) Assess the potential for the following activities and facility areas to contribute pollutants to storm water discharges: onsite waste storage or disposal; dirt/gravel parking areas for vehicles awaiting maintenance; illicit plumbing connections between shop floor drains and the storm water conveyance system(s); and fueling areas. Describe these activities in the SWPPP.

8.P.4.3 Description of Good Housekeeping Measures. You must document in your SWPPP the good housekeeping measures you implement consistent with Part 8.P.3.

8.P.4.4 Vehicle and Equipment Wash Water Requirements. If applicable, attach to or reference in your SWPPP, a copy of the NPDES permit issued for vehicle/equipment wash water or, if an NPDES permit has not been issued, a copy of the pending application. If wash water is handled in a manner that does not involve separate NPDES permitting (e.g., hauled offsite), describe the disposal method and include all pertinent documentation/information (e.g., frequency, volume, destination, etc.) in the SWPPP. Discharges of vehicle and equipment wash water, including tank cleaning operations, are not authorized by this permit for this sector.

8.P.5 Additional Inspection Requirements. (See also Part 4.1) Inspect all the following areas/activities: storage areas for vehicles/equipment awaiting maintenance; fueling areas; indoor and outdoor vehicle/equipment maintenance areas; material storage areas; vehicle/equipment cleaning areas; and loading/unloading areas.

8.Q Sector Q – Water Transportation

8.Q.1 Covered Storm Water Discharges. The requirements in Subpart Q apply to storm water discharges associated with industrial activity from Water Transportation facilities as identified by the SIC Codes specified under Sector Q in Table D-1 of Appendix D of the permit.

8.Q.2 Limitations on Coverage.

8.Q.2.1 Prohibition of Non-Storm water Discharges. (See also Part 1.1.4) Discharges from vessels are not covered by this permit including: bilge and ballast water, sanitary wastes, pressure wash water, and cooling water. Any discharges of pollutants from a point source to waters of the state requires coverage under an NPDES permit.

8.Q.3 Additional Technology-Based Effluent Limits.

8.Q.3.1 Good Housekeeping Measures. You must implement the following good housekeeping measures in addition to the requirements of part 2.1.2.2:

8.Q.3.1.1 Pressure Washing Area. If pressure washing is used to remove marine growth from vessels, the discharge water must be permitted by a separate NPDES permit. Collect or contain the discharges from the pressures washing area so that they are not co-mingled with storm water discharges authorized by this permit.

8.Q.3.1.2 Blasting and Painting Area. Minimize the potential for spent abrasives, paint chips, and overspray to be discharged into receiving waters or the storm sewer systems. Contain all blasting and painting activities, or use other measures, to minimize the discharge of contaminants (e.g., hanging plastic barriers or tarpaulins during blasting or painting operations to contain debris). When necessary, regularly clean storm water conveyances of deposits of abrasive blasting debris and paint chips.

8.Q.3.1.3 Material Storage Areas. Store and plainly label all containerized materials (e.g., fuels, paints, solvents, waste oil, antifreeze, batteries) in a protected, secure location away from drains. Minimize the contamination of precipitation or surface runoff from the storage areas. Specify which materials are stored indoors, and contain, enclose, or use other measures for those stored outdoors. If abrasive blasting is performed, discuss the storage and disposal of spent abrasive materials generated at the facility. Implement an inventory control plan to limit the presence of potentially hazardous materials onsite.

8.Q.3.1.4 Engine Maintenance and Repair Areas. Minimize the contamination of precipitation or surface runoff from all areas used for engine maintenance and repair through implementation of control measures such as the following, where determined to be feasible (list not exclusive): performing all maintenance activities indoors; maintaining an organized inventory of materials used in the shop; draining all parts of fluid prior to disposal; prohibiting the practice of hosing down the shop floor; using dry cleanup methods; and treating and/or recycling storm water runoff collected from the maintenance area.

8.Q.3.1.5 Material Handling Area. Minimize the contamination of precipitation or surface runoff from material handling operations and areas (e.g., fueling, paint and solvent mixing, disposal of process wastewater streams from vessels) through implementation of control measures such as the following, where determined to be feasible (list not exclusive): covering fueling areas; using spill and overflow protection; mixing paints and solvents in a designated area (preferably indoors or under a shed); and minimizing runoff of storm water to material handling areas.

8.Q.3.1.6 Drydock Activities. Routinely maintain and clean the drydock to minimize pollutants in storm water runoff. Address the cleaning of accessible areas of the drydock prior to flooding, and final cleanup following removal of the vessel and raising the dock.

Include procedures for cleaning up oil, grease, and fuel spills occurring on the drydock. To minimize discharges of pollutants in storm water from drydock activities, implement control measures such as the following, where determined to be feasible (list not exclusive): sweeping rather than hosing off debris and spent blasting material from accessible areas of the drydock prior to flooding; and making absorbent materials and oil containment booms readily available to clean up or contain any spills.

8.Q.3.2 Employee Training. (See also Part 2.1.2.9) As part of your employee training program, address, at a minimum, the following activities (as applicable): used oil management; spent solvent management; disposal of spent abrasives; disposal of vessel wastewaters; spill prevention and control; fueling procedures; general good housekeeping practices; painting and blasting procedures; and used battery management.

8.Q.3.3 Preventive Maintenance. (See also Part 2.1.2.3) As part of your preventive maintenance program, perform timely inspection and maintenance of storm water management devices (e.g., cleaning oil and water separators and sediment traps to ensure that spent abrasives, paint chips, and solids will be intercepted and retained prior to entering the storm drainage system), as well as inspecting and testing facility equipment and systems to uncover conditions that could cause breakdowns or failures resulting in discharges of pollutants to surface waters.

8.Q.4 Additional SWPPP Requirements.

8.Q.4.1 Drainage Area Site Map. (See also Part 5.1.2) Document in your SWPPP where any of the following may be exposed to precipitation or surface runoff: fueling; engine maintenance and repair; vessel maintenance and repair; pressure washing; painting; sanding; blasting; welding; metal fabrication; loading and unloading areas; locations used for the treatment, storage, or disposal of wastes; liquid storage tanks; liquid storage areas (e.g., paint, solvents, resins); and material storage areas (e.g., blasting media, aluminum, steel, scrap iron).

8.Q.4.2 Summary of Potential Pollutant Sources. (See also Part 5.1.3) Document in the SWPPP the following additional sources and activities that have potential pollutants associated with them: outdoor manufacturing or processing activities (e.g., welding, metal fabricating) and significant dust or particulate generating processes (e.g., abrasive blasting, sanding, and painting.)

8.Q.5 Additional Inspection Requirements. (See also Part 4.1) Include the following in all quarterly routine facility inspections: pressure washing area; blasting, sanding, and painting areas; material storage areas; engine maintenance and repair areas; material handling areas; drydock area; and general yard area.

8.Q.6 Sector-Specific Benchmarks. (See also Part 6) Table 8.Q-1 identifies benchmarks that apply to Sector Q. These benchmarks apply to both your primary industrial activity and any co-located industrial activities.

Table 8.Q-1		
Subsector (You may be subject to requirements for more than one sector/subsector)	Parameter	Benchmark Monitoring Concentration
Subsector Q1. Water Transportation Facilities (SIC 4412-4499)	Total Aluminum	0.75 mg/L
	Total Lead ¹	Hardness Dependent
	Total Zinc ¹	Hardness Dependent

¹ The benchmark values of some metals are dependent on water hardness. For these parameters, permittees must determine the hardness of the receiving water (see Appendix E, “Calculating Hardness in Receiving Waters for Hardness Dependent Metals,” for methodology), in accordance with Part 6.2.1.1, to identify the applicable ‘hardness range’ for determining their benchmark value applicable to their facility. The ranges occur in 25 mg/L increments. Hardness Dependent Hardness-based benchmarks follow Table 8.2-1 and the requirements in Appendix E.

8.R Sector R – Ship and Boat Building and Repair Yards

8.R.1 Covered Storm Water Discharges. The requirements in Subpart R apply to storm water discharges associated with industrial activity from Ship and Boat Building and Repair Yards as identified by the SIC Codes specified under Sector R in Table D-1 of Appendix D of the permit.

8.R.2 Limitations on Coverage.

8.R.2.1 Prohibition of Non-Storm Water Discharges. (See also Part 1.1.4) Discharges from vessels are not covered by this permit including: bilge and ballast water, sanitary wastes, pressure wash water, and cooling water.

8.R.3 Additional Technology-Based Effluent Limits.

8.R.3.1 Good Housekeeping Measures. (See also Part 2.1.2.2)

8.R.3.1.1 Pressure Washing Area. If pressure washing is used to remove marine growth from vessels, the discharged water must be permitted as a process wastewater by a separate NPDES permit.

8.R.3.1.2 Blasting and Painting Area. Minimize the potential for spent abrasives, paint chips, and overspray to be discharged into the receiving water or the storm sewer systems. Consider containing all blasting and painting activities, or use other measures to prevent the discharge of the contaminants (e.g., hanging plastic barriers or tarpaulins during blasting or painting operations to contain debris). When necessary, regularly clean storm water conveyances of deposits of abrasive blasting debris and paint chips.

8.R.3.1.3 Material Storage Areas. Store and plainly label all containerized materials (e.g., fuels, paints, solvents, waste oil, antifreeze, batteries) in a protected, secure location away from drains. Minimize the contamination of precipitation or surface runoff from the storage areas. If abrasive blasting is performed, discuss the storage and disposal of spent abrasive materials generated at the facility. Implement an inventory control plan to limit the presence of potentially hazardous materials onsite.

8.R.3.1.4 Engine Maintenance and Repair Areas. Minimize the contamination of precipitation or surface runoff from all areas used for engine maintenance and repair through implementation of control measures such as the following, where determined to be feasible (list not exclusive): performing all maintenance activities indoors; maintaining an organized inventory of materials used in the shop; draining all parts of fluid prior to disposal; prohibiting the practice of hosing down the shop floor; using dry cleanup methods; and treating and/or recycling storm water runoff collected from the maintenance area.

8.R.3.1.5 Material Handling Area. Minimize the discharge of pollutants in storm water from material handling operations and areas (e.g., fueling, paint and solvent mixing, disposal of process wastewater streams from vessels) through implementation of control measures such as the following, where determined to be feasible (list not exclusive): covering fueling areas; using spill and overflow protection; mixing paints and solvents in a designated area (preferably indoors or under a shed); and minimizing storm water runoff to material handling areas.

8.R.3.1.6 Drydock Activities. Routinely maintain and clean the drydock to minimize pollutants in storm water runoff. Clean accessible areas of the drydock prior to flooding and final cleanup following removal of the vessel and raising the dock. Include procedures for cleaning up oil, grease, or fuel spills occurring on the drydock. To minimize discharges of pollutants in storm water from drydock activities, implement control measures such as the following, where determined to be feasible (list not exclusive): sweeping rather than hosing off debris and spent blasting material from

accessible areas of the drydock prior to flooding; and having absorbent materials and oil containment booms readily available to clean up and contain any spills.

8.R.3.2 Employee Training. (See also Part 2.1.2.9) As part of your employee training program, address, at a minimum, the following activities (as applicable): used oil management; spent solvent management; disposal of spent abrasives; disposal of vessel wastewaters; spill prevention and control; fueling procedures; general good housekeeping practices; painting and blasting procedures; and used battery management.

8.R.3.3 Preventive Maintenance. (See also Part 2.1.2.3) As part of your preventive maintenance program, perform timely inspection and maintenance of storm water management devices (e.g., cleaning oil and water separators and sediment traps to ensure that spent abrasives, paint chips, and solids will be intercepted and retained prior to entering the storm drainage system), as well as inspecting and testing facility equipment and systems to uncover conditions that could cause breakdowns or failures resulting in discharges of pollutants to surface waters.

8.R.4 Additional SWPPP Requirements.

8.R.4.1 Drainage Area Site Map. (See also Part 5.1.2) Document in your SWPPP where any of the following may be exposed to precipitation or surface runoff: fueling; engine maintenance or repair; vessel maintenance or repair; pressure washing; painting; sanding; blasting; welding; metal fabrication; loading and unloading areas; treatment, storage, and waste disposal areas; liquid storage tanks; liquid storage areas (e.g., paint, solvents, resins); and material storage areas (e.g., blasting media, aluminum, steel, scrap iron).

8.R.4.2 Potential Pollutant Sources. (See also Part 5.1.3) Document in your SWPPP the following additional sources and activities that have potential pollutants associated with them (if applicable): outdoor manufacturing or processing activities (e.g., welding, metal fabricating) and significant dust or particulate generating processes (e.g., abrasive blasting, sanding, and painting).

8.R.4.3 Documentation of Good Housekeeping Measures. Document in your SWPPP any good housekeeping measures implemented to meet the effluent limits in Part 8.R.3.

8.R.4.3.1 Blasting and Painting Areas. Document in the SWPPP any standard operating practices relating to blasting and painting (e.g., prohibiting uncontained blasting and painting over open water or prohibiting blasting and painting during windy conditions, which can render containment ineffective).

8.R.4.3.2 Storage Areas. Specify in your SWPPP which materials are stored indoors; and contain, enclose, or use other measures for those stored outdoors.

8.R.5 Additional Inspection Requirements. (See also Part 4.1) Include the following in all quarterly routine facility inspections: pressure washing area; blasting, sanding, and painting areas; material storage areas; engine maintenance and repair areas; material handling areas; drydock area; and general yard area.

8.S Sector S – Air Transportation

8.S.1 Covered Storm Water Discharges. The requirements in Subpart S apply to storm water discharges associated with industrial activity from Air Transportation facilities identified by the SIC Codes specified under Sector S in Table D-1 of Appendix D of the permit.

8.S.2 Limitation on Coverage.

8.S.2.1 Limitations on Coverage. This permit authorizes storm water discharges from only those portions of the air transportation facility that are involved in vehicle maintenance (including vehicle rehabilitation, mechanical repairs, painting, fueling and lubrication), equipment cleaning operations or deicing operations.

Note: the term “deicing” in this permit will generally be used to imply both deicing (removing frost, snow or ice) and anti-icing (preventing accumulation of frost, snow or ice) activities, unless specific mention is made otherwise.

8.S.2.2 Prohibition of Non-Storm Water Discharges. (See also Part 1.1.4 and Part 8.S.4.3) This permit does not authorize the discharge of aircraft, ground vehicle, runway and equipment wash waters; nor the dry weather discharge of deicing chemicals. Such discharges must be covered by separate NPDES permit(s). Note that a discharge resulting from snowmelt is not a dry weather discharge.

8.S.3 Additional Technology-Based Effluent Limits.

8.S.3.1 Good Housekeeping Measures. (See also Part 2.1.2.2)

8.S.3.1.1 Aircraft, Ground Vehicle and Equipment Maintenance Areas. Minimize the contamination of storm water runoff from all areas used for aircraft, ground vehicle and equipment maintenance (including the maintenance conducted on the terminal apron and in dedicated hangers) through implementation of control measures such as the following, where determined to be feasible and that accommodate considerations of safety, space, operational constraints, and flight considerations (list not exclusive): performing maintenance activities indoors; maintaining an organized inventory of material used in the maintenance areas; draining all parts of fluids prior to disposal; prohibiting the practice of hosing down the apron or hanger floor; using dry cleanup methods; and collecting the storm water runoff from the maintenance area and providing treatment or recycling.

8.S.3.1.2 Aircraft, Ground Vehicle and Equipment Cleaning Areas. (See also Part 8.S.3.1.6) Clearly demarcate these areas on the ground using signage or other appropriate means. Minimize the contamination of storm water runoff from cleaning areas.

8.S.3.1.3 Aircraft, Ground Vehicle and Equipment Storage Areas. Store all aircraft, ground vehicles and equipment awaiting maintenance in designated areas only and implement control measures to minimize the discharge of pollutants in storm water from these storage areas where determined to be feasible and that accommodate considerations of safety, space, operational constraints, and flight considerations (list not exclusive): storing aircraft and ground vehicles indoors; using drip pans for the collection of fluid leaks; and perimeter drains, dikes or berms surrounding the storage areas.

8.S.3.1.4 Material Storage Areas. Maintain the vessels of stored materials (e.g., used oils, hydraulic fluids, spent solvents, and waste aircraft fuel) in good condition to prevent or minimize contamination of storm water. Also plainly label the vessels (e.g., “used oil,” “Contaminated Jet A,” etc.). To minimize contamination of precipitation/runoff from these areas implement control measures such as the following, where determined to be feasible and that accommodate considerations of safety, space, operational constraints,

and flight considerations (list not exclusive): storing materials indoors; storing waste materials in a centralized location; and installing berms/dikes around storage areas.

8.S.3.1.5 Airport Fuel System and Fueling Areas. Minimize the discharge of pollutants in storm water from airport fuel system and fueling areas through implementation of control measures such as the following, where determined to be feasible and that accommodate considerations of safety, space, operational constraints, and flight considerations (list not exclusive): implementing spill and overflow practices (e.g., placing absorptive materials beneath aircraft during fueling operations); using only dry cleanup methods; and collecting storm water runoff. If you have implemented a SPCC plan, you may cite relevant aspects that comply with the requirements of this section in you SWPPP.

8.S.3.1.6 Source Reduction. Consistent with safety considerations, minimize, and where feasible eliminate, the use of urea and glycol-based deicing chemicals, to reduce the aggregate amount of deicing chemicals used that could add pollutants to storm water discharges. Chemical options to replace pavement deicers (urea or glycol) include (list not exclusive): potassium acetate; magnesium acetate; calcium acetate; and anhydrous sodium acetate.

- *Runway Deicing Operation.* To minimize the discharge of pollutants in storm water from runway deicing operations, implement source reduction control measures such as the following, where determined to be feasible and that accommodate considerations of safety, space, operational constraints, and flight consideration (list not exclusive): metered application of chemicals; pre-wetting dry chemical constituents prior to application; installing a runway ice detection system; implementing anti-icing operations as a preventive measure against ice buildup; heating sand; and product substitution.
- *Aircraft Deicing Operations.* Minimize the discharge of pollutants in storm water from aircraft deicing operations. Determine whether excessive application of deicing chemicals occurs and adjust as necessary, consistent with considerations of flight safety. Determine whether alternatives to glycol and whether containment measures for applied chemicals are feasible. Implement control measures for reducing deicing fluid such as the following, where determined to be feasible and that accommodate considerations of safety, space, operational constraints, and flight considerations (list not exclusive): forced-air deicing systems; computer-controlled fixed-gantry systems; infrared technology; hot water; varying glycol content to air temperature; enclosed-basket deicing trucks; mechanical methods; solar radiation; hangar storage; aircraft covers; and thermal blankets for MD-80s and DC-9s. Also consider using ice-detection systems, airport traffic flow strategies, and departure slot allocation systems where feasible. The evaluations and determinations required by this Part should be carried out by the personnel most familiar with the particular aircraft and flight operations and related systems in question (versus an outside entity such as the airport authority).

8.S.3.1.7 Management of Runoff. (See also 2.1.2.6) Where deicing operations occur, implement a program to control or manage contaminated runoff to minimize the discharge of pollutants in storm water such as the following, where determined to be feasible and that accommodate considerations of safety, space, operational constraints, and flight considerations (list not exclusive): installing a centralized deicing pad to recover deicing fluid following application; plug-and-pump (PnP); using vacuum/collection trucks (glycol recovery vehicles); storing contaminated storm water/deicing fluids in tanks; recycling collected deicing fluid where feasible; releasing controlled amounts to a publicly owned treatment works; mechanical systems (snow plows, brushes); separation of contaminated snow; conveying contaminated runoff into a

storm water impoundment for biochemical decomposition (be aware of attracting wildlife that may prove hazardous to flight operations); directing runoff into vegetative swales or other infiltration measures; and pollution prevention practices such as ice detection systems, and airfield prewetting.

When applying deicing fluids during non-precipitation events (also referred to as “clear ice deicing”), implement control measures to prevent unauthorized discharge of pollutants (dry-weather discharges of pollutants would need coverage under an NPDES wastewater permit), or to minimize the discharge of pollutants from deicing fluids in later storm water discharges, implement control measures such as the following, where determined to be feasible and that accommodate considerations safety, space, operational constraints, and flight considerations (list not exclusive): recovering deicing fluids and recycling whenever practicable; preventing the fluids from entering storm sewers or other storm water discharge conveyances (e.g., covering storm sewer inlets, using booms, installing absorptive interceptors in the drains); and releasing controlled amounts to a publicly owned treatment works.

8.S.3.2 Deicing Season. You must determine the seasonal timeframe (e.g., October - April) during which deicing activities typically occur at the facility. Implementation of control measures, including any BMPs, facility inspections and monitoring must be conducted with particular emphasis throughout the defined deicing season. If you meet the deicing chemical usage thresholds of 100,000 gallons glycol and/or 100 tons of urea, the deicing season you identified is the timeframe during which you must obtain the four required benchmark monitoring event results for deicing-related parameters, i.e., BOD, COD, ammonia and pH. See also Part 8.S.6.

8.S.4 Additional SWPPP Requirements. An airport authority and tenants of the airport are encouraged to work in partnership in the development of a SWPPP. If an airport tenant obtains authorization under this permit and develops a SWPPP for discharges from its own areas of the airport, prior to authorization, that SWPPP must be coordinated and integrated with the SWPPP for the entire airport. Tenants of the airport facility include air passenger or cargo companies, fixed based operators and other parties who have contracts with the airport authority to conduct business operations on airport property and whose operations result in storm water discharges associated with industrial activity.

8.S.4.1 Drainage Area Site Map. (See also Part 5.1.2) Document in the SWPPP the following areas of the facility and indicate whether activities occurring there may be exposed to precipitation/surface runoff: aircraft and runway deicing operations; fueling stations; aircraft, ground vehicle and equipment maintenance/cleaning areas; and storage areas for aircraft, ground vehicles and equipment awaiting maintenance.

8.S.4.2 Potential Pollutant Sources. (See also Part 5.1.3) In the inventory of exposed materials, describe the potential for the following activities and facility areas to contribute pollutants to storm water discharges: aircraft, runway, ground vehicle and equipment maintenance and cleaning; and aircraft and runway deicing operations (including apron and centralized aircraft deicing stations, runways, taxiways and ramps). If deicing chemicals are used, you must maintain a record of the types (including the Safety Data Sheets [SDS]) used and the monthly quantities, either as measured or, in the absence of metering, using best estimates. This includes all deicing chemicals, not just glycols and urea (e.g., potassium acetate), because large quantities of these other chemicals can still have an adverse impact on receiving waters. Deicing operators must provide the above information to the airport authority for inclusion with any comprehensive airport SWPPPs.

8.S.4.3 Vehicle and Equipment Wash Water Requirements. Attach to or reference in your SWPPP, a copy of the NPDES permit issued for vehicle/equipment wash water or, if an NPDES permit has not been issued, a copy of the pending application. If wash water is handled in manner

that does not involve separate NPDES permitting (e.g., hauled offsite, retained onsite), describe the disposal method and attach all pertinent information (e.g., frequency, volume, destination, etc.) in your SWPPP. Discharges of vehicle and equipment wash water are not authorized by this permit for this sector.

8.S.4.4 Documentation of Control Measures Used for Management of Runoff. Document in your SWPPP the control measures used for collecting or containing contaminated melt water from collection areas used for disposal of contaminated snow.

8.S.5 Additional Inspection Requirements.

8.S.5.1 Inspections. (See also Part 4.1) At a minimum conduct routine facility inspections at least monthly during the deicing season (e.g., October - April). If your facility needs to deice before or after this period, expand the monthly inspections to include all months during which deicing chemicals may be used. The Director may specifically require you to increase inspection frequencies.

8.S.5.2 Comprehensive Site Inspections. (See also Part 4.3) Using only qualified personnel, conduct your annual site inspection during periods of actual deicing operations, if possible. If not practicable during active deicing because of weather, conduct the inspection during the season when deicing operations occur and the materials and equipment for deicing are in place.

8.S.6 Sector-Specific Benchmarks. (See also Part 6) Table 8.S-1 identifies benchmarks that apply to Sector S. These benchmarks apply to both your primary industrial activity and any co-located industrial activities.

Subsector (You may be subject to requirements for more than one sector/subsector)	Parameter	Benchmark Monitoring Concentration
For airports where a single permittee, or a combination of permitted facilities use more than 100,000 gallons of pure glycol in glycol-based deicing chemicals and/or 100 tons or more of urea on an average annual basis, monitor these parameters in ONLY those outfalls that collect runoff from areas where deicing activities occur (SIC 4512-4581).	Biochemical Oxygen Demand (BOD5) ¹	30.0 mg/L
	Chemical Oxygen Demand (COD) ¹	120.0 mg/L
	Ammonia ¹	2.14 mg/L
	pH ¹	6.0 - 9.0 S.U.

¹ These are deicing-related parameters. Collect the four benchmark samples, and any required follow-up benchmark samples, during the timeframe defined in Part 8.S.3.2 when deicing activities are occurring.

8.S.7 Effluent Limitations Based on Effluent Limitations Guidelines and New Source Performance Standards. (See also 6.2.3)

8.S.7.1 Airfield Pavement Deicing. For both existing and new “primary airports” (as defined at 40 CFR Part 449.2) with 1,000 or more annual non-propeller aircraft departures that discharge storm water from airfield pavement deicing activities, there shall be no discharge of airfield pavement deicers containing urea. To comply with this limitation, such airports must do one of the following: certify annually and maintain with your SWPPP that you do not use pavement deicers containing urea, or meet the effluent limitation in Table 8.S-2.

8.S.7.2 Aircraft Deicing. Airports that are both “primary airports” (as defined at 40 CFR Part 449.2) and new sources (“new airports”) with 1,000 or more annual non-propeller aircraft departures must meet the applicable requirements for aircraft deicing at 40 CFR Part 449.11 (a).

Discharges of the collected aircraft deicing fluid directly to waters of the state are not eligible for coverage under this permit.

8.S.7.3 Monitoring, Reporting, and Recordkeeping. For new and existing airports subject to the effluent limitations in part 8.S.7.1 or 8.S.7.2 of the permit, you must comply with applicable monitoring, reporting, and recordkeeping requirements outlined in 40 CFR Part 449.20.

Industrial Activity	Parameter	Effluent Limitation
Runoff containing urea from airfield pavement deicing at existing and new primary airports with 1,000 or more annual non-propeller aircraft departures	Ammonia as Nitrogen	14.7 mg/L, daily maximum

8.T Sector T – Treatment Works

8.T.1 Covered Storm Water Discharges. The requirements in Subpart T apply to storm water discharges associated with industrial activity from Treatment Works as identified by the Activity Code specified under Sector T in Table D-1 of Appendix D of the permit.

8.T.2 Industrial Activities Covered by Sector T. This permit authorizes storm water discharges from all existing point source storm water discharges associated with the following activities: treatment works treating domestic sewage, or any other sewage sludge or wastewater treatment device or system used in the storage, treatment, recycling, and reclamation of municipal or domestic sewage, including land dedicated to the disposal of sewage sludge; that are located within the confines of a facility with a design flow of 1.0 million gallons per day (MGD) or more.

The following are not required to have permit coverage: farmlands, domestic gardens or lands used for sludge management where sludge is beneficially reused and which are not physically located within the facility, or areas that are in compliance with Section 405 of the CWA.

8.T.3 Limitations on Coverage.

8.T.3.1 Prohibition of Non-Storm Water Discharges. (See also Part 1.1.4) Sanitary and industrial wastewater and equipment and vehicle wash water are not authorized by this permit.

8.T.4 Additional Technology-Based Effluent Limits.

8.T.4.1 Control Measures. (See also Part 2.1.2) To minimize the discharge of pollutants in storm water, implement control measures such as the following, where determined to be feasible (list not exclusive): routing storm water to the treatment works; or covering exposed materials (i.e., from the following areas: grit, screenings, and other solids handling, storage, or disposal areas; sludge drying beds; dried sludge piles; compost piles; and septage or hauled waste receiving station).

8.T.4.2 Employee Training. (See also Part 2.1.2.9) At a minimum, training must address the following areas when applicable to a facility: petroleum product management; process chemical management; spill prevention and controls; fueling procedures; general good housekeeping practices; and proper procedures for using fertilizer, herbicides, and pesticides.

8.T.5 Additional SWPPP Requirements.

8.T.5.1 Site Map. (See also Part 5.1.2) Document in your SWPPP where any of the following may be exposed to precipitation or surface runoff: grit, screenings, and other solids handling, storage, or disposal areas; sludge drying beds; dried sludge piles; compost piles; septage or hauled waste receiving station; and storage areas for process chemicals, petroleum products, solvents, fertilizers, herbicides, and pesticides.

8.T.5.2 Potential Pollutant Sources. (See also Part 5.1.3) Document in your SWPPP the following additional sources and activities that have potential pollutants associated with them, as applicable: grit, screenings, and other solids handling, storage, or disposal areas; sludge drying beds; dried sludge piles; compost piles; septage or hauled waste receiving station; and access roads and rail lines.

8.T.5.3 Wastewater and Wash Water Requirements. Keep a copy of all your current NPDES permits issued for wastewater and industrial, vehicle and equipment wash water discharges or, if an NPDES permit has not yet been issued, a copy of the pending application(s) with your SWPPP. If wastewater and/or vehicle and equipment wash water is handled in another manner (e.g., hauled offsite, retained onsite), the disposal method must be described and all pertinent information (e.g., frequency, volume, destination) must be included in your SWPPP. Discharges of vehicle and equipment wash water, including tank cleaning operations, are not authorized by this permit for this sector.

8.T.6 Additional Inspection Requirements. (See also Part 4.1) Include the following areas in all inspections: access roads and rail lines; grit, screenings, and other solids handling, storage, or disposal areas; sludge drying beds; dried sludge piles; compost piles; and septage or hauled waste receiving station.

8.U Sector U – Food and Kindred Products

8.U.1 Covered Storm Water Discharges. The requirements in Subpart U apply to storm water discharges associated with industrial activity from Food and Kindred Products facilities as identified by the SIC Codes specified in Table D-1 of Appendix D of the permit.

8.U.2 Limitations on Coverage.

8.U.2.1 Prohibition of Non-Storm Water Discharges. (See also Part 1.1.4) The following discharges are not authorized by this permit: discharges containing boiler blowdown; cooling tower overflow and blowdown; ammonia refrigeration purging; and vehicle washing and clean-out operations.

8.U.3 Additional Technology-Based Limitations.

8.U.3.1 Employee Training. (See also Part 2.1.2.9) Address pest control in your employee training program.

8.U.4 Additional SWPPP Requirements.

8.U.4.1 Drainage Area Site Map. (See also Part 5.1.2) Document in your SWPPP the locations of the following activities if they are exposed to precipitation or runoff: vents and stacks from cooking, drying, and similar operations; dry product vacuum transfer lines; animal holding pens; spoiled product; and broken product container storage areas.

8.U.4.2 Potential Pollutant Sources. (See also Part 5.1.3) Document in your SWPPP, in addition to food and kindred products processing-related industrial activities, application and storage of pest control chemicals (e.g., rodenticides, insecticides, fungicides) used on plant grounds.

8.U.5 Additional Inspection Requirements. (See also Part 4.1) Inspect on a quarterly basis, at a minimum, the following areas where the potential for exposure to storm water exists: loading and unloading areas for all significant materials; storage areas, including associated containment areas; waste management units; vents and stacks emanating from industrial activities; spoiled product and broken product container holding areas; animal holding pens; staging areas; and air pollution control equipment.

8.U.6 Sector-Specific Benchmarks. (See also Part 6) Table 8.U-1 identifies benchmarks that apply to the specific subsectors of Sector U. These benchmarks apply to both your primary industrial activity and any co-located industrial activities.

Subsector (You may be subject to requirements for more than one sector/subsector)	Parameter	Benchmark Monitoring Concentration
Subsector U1. Grain Mill Products (SIC 2041-2048)	Total Suspended Solids (TSS)	100 mg/L
Subsector U2. Fats and Oils Products (SIC 2074-2079)	Biochemical Oxygen Demand (BOD ₅)	30.0 mg/L
	Chemical Oxygen Demand (COD)	120.0 mg/L
	Nitrate plus Nitrite Nitrogen	0.68 mg/L
	Total Suspended Solids (TSS)	100 mg/L

8.V Sector V – Textile Mills, Apparel, and Other Fabric Products

8.V.1 Covered Storm Water Discharges. The requirements in Subpart V apply to storm water discharges associated with industrial activity from Textile Mills, Apparel, and Other Fabric Product manufacturing as identified by the SIC Codes specified under Sector V in Table D-1 of Appendix D of the permit.

8.V.2 Limitations on Coverage.

8.V.2.1 Prohibition of Non-Storm Water Discharges. (See also Part 1.1.4) The following are not authorized by this permit: discharges of wastewater (e.g., wastewater resulting from wet processing or from any processes relating to the production process); reused or recycled water; and waters used in cooling towers. If you have these types of discharges from your facility, you must cover them under a separate NPDES permit.

8.V.3 Additional Technology-Based Limitations

8.V.3.1 Good Housekeeping Measures. (See also Part 2.1.2.2)

8.V.3.1.1 Material Storage Areas. Plainly label and store all containerized materials (e.g., fuels, petroleum products, solvents, and dyes) in a protected area, away from drains. Minimize contamination of the storm water runoff from such storage areas. Also consider an inventory control plan to prevent excessive purchasing of potentially hazardous substances. For storing empty chemical drums or containers, ensure that the drums and containers are clean (consider triple-rinsing) and that there is no contact of residuals with precipitation or runoff. Collect and dispose of wash water from these cleanings properly.

8.V.3.1.2 Material Handling Areas. Minimize contamination of storm water runoff from material handling operations and areas through implementation of control measures such as the following, where determined to be feasible: using spill and overflow protection; covering fueling areas; and covering or enclosing areas where the transfer of material may occur. When applicable, address the replacement or repair of leaking connections, valves, transfer lines, and pipes that may carry chemicals, dyes, or wastewater.

8.V.3.1.3 Fueling Areas. Minimize contamination of storm water runoff from fueling areas through implementation of control measures such as the following, where determined to be feasible: covering the fueling area; using spill and overflow protection; minimizing run-on of storm water to the fueling areas; using dry cleanup methods; and treating and/or recycling storm water runoff collected from the fueling area.

8.V.3.1.4 Above-Ground Storage Tank Area. Minimize contamination of the storm water runoff from above-ground storage tank areas, including the associated piping and valves, through implementation of control measures such as the following, where determined to be feasible (list not exclusive): regular cleanup of these areas; including measures for tanks, piping and valves explicitly in your SPCC program; minimizing runoff of storm water from adjacent areas; restricting access to the area; inserting filters in adjacent catch basins; providing absorbent booms in unbermed fueling areas; using dry cleanup methods; and permanently sealing drains within critical areas that may discharge to a storm drain.

8.V.3.2 Employee Training. (See also Part 2.1.2.9) As part of your employee training program, address, at a minimum, the following activities (as applicable): use of reused and recycled waters; solvents management; proper disposal of dyes; proper disposal of petroleum products and spent lubricants; spill prevention and control; fueling procedures; and general good housekeeping practices.

8.V.4 Additional SWPPP Requirements.

8.V.4.1 Potential Pollutant Sources. (See also Part 5.1.3) Document in your SWPPP the following additional sources and activities that have potential pollutants associated with them: industry-specific significant materials and industrial activities (e.g., backwinding, beaming, bleaching, backing bonding, carbonizing, carding, cut and sew operations, desizing, drawing, dyeing locking, fulling, knitting, mercerizing, opening, packing, plying, scouring, slashing, spinning, synthetic-felt processing, textile waste processing, tufting, turning, weaving, web forming, winging, yarn spinning, and yarn texturing).

8.V.4.2 Description of Good Housekeeping Measures for Material Storage Areas. Document in the SWPPP your containment area or enclosure for materials stored outdoors in connection with Part 8.V.3.1.1 above.

8.V.5 Additional Inspection Requirements. (See also Part 4.1) Inspect, at least monthly, the following activities and areas (at a minimum): transfer and transmission lines; spill prevention; good housekeeping practices; management of process waste products; and all structural and nonstructural management practices.

8.W Sector W – Furniture and Fixtures

8.W.1 Covered Storm Water Discharges. The requirements in Subpart W apply to storm water discharges associated with industrial activity from Furniture and Fixtures facilities as identified by the SIC Codes specified under Sector W in Table D-1 of Appendix D of the permit.

8.W.2 Additional SWPPP Requirements.

8.W.2.1 Drainage Area Site Map. (See also Part 5.1.2) Document in your SWPPP where any of the following may be exposed to precipitation or surface runoff: material storage (including tanks or other vessels used for liquid or waste storage) areas; outdoor material processing areas; areas where wastes are treated, stored, or disposed of; access roads; and rail spurs.

8.X Sector X – Printing and Publishing

8.X.1 Covered Storm Water Discharges. The requirements in Subpart X apply to storm water discharges associated with industrial activity from Printing and Publishing facilities as identified by the SIC Codes specified under Sector X in Table D-1 of Appendix D of the permit.

8.X.2 Additional Technology-Based Effluent Limits.

8.X.2.1 Good Housekeeping Measures. (See also Part 2.1.2.2)

8.X.2.1.1 Material Storage Areas. Plainly label and store all containerized materials (e.g., skids, pallets, solvents, bulk inks, hazardous waste, empty drums, portable and mobile containers of plant debris, wood crates, steel racks, and fuel oil) in a protected area, away from drains. Minimize contamination of the storm water runoff from such storage areas. Also consider an inventory control plan to prevent excessive purchasing of potentially hazardous substances.

8.X.2.1.2 Material Handling Area. Minimize contamination of storm water runoff from material handling operations and areas (e.g., blanket wash, mixing solvents, loading and unloading materials) through implementation of control measures such as the following, where determined to be feasible (list not exclusive): using spill and overflow protection, covering fueling areas, and covering or enclosing areas where the transfer of materials may occur. When applicable, address the replacement or repair of leaking connections, valves, transfer lines, and pipes that may carry chemicals or wastewater.

8.X.2.1.3 Fueling Areas. Minimize contamination of storm water runoff from fueling areas through implementation of control measures such as the following, where determined to be feasible (list not exclusive): covering the fueling area; using spill and overflow protection; minimizing runoff of storm water to the fueling areas; using dry cleanup methods; and treating and/or recycling storm water runoff collected from the fueling area.

8.X.2.1.4 Above Ground Storage Tank Area. Minimize contamination of the storm water runoff from above-ground storage tank areas, including the associated piping and valves through implementation of control measures such as the following, where determined to be feasible (list not exclusive): regularly cleaning these areas, explicitly addressing tanks, piping and valves in the SPCC program; minimizing storm water runoff from adjacent areas; restricting access to the area; inserting filters in adjacent catch basins; providing absorbent booms in unbermed fueling areas; using dry cleanup methods; and permanently sealing drains within critical areas that may discharge to a storm drain.

8.X.2.2 Employee Training. (See also Part 2.1.2.9) As part of your employee training program, address, at a minimum, the following activities (as applicable): spent solvent management; spill prevention and control; used oil management; fueling procedures; and general good housekeeping practices.

8.X.3 Additional SWPPP Requirements.

8.X.3.1 Description of Good Housekeeping Measures for Material Storage Areas. In connection with Part 8.X.2.1.1, describe in the SWPPP the containment area or enclosure for materials stored outdoors.

8.Y Sector Y – Rubber, Miscellaneous Plastic Products, and Miscellaneous Manufacturing Industries

8.Y.1 Covered Storm Water Discharges. The requirements in Subpart Y apply to storm water discharges associated with industrial activity from Rubber, Miscellaneous Plastic Products, and Miscellaneous Manufacturing Industries facilities as identified by the SIC Codes specified under Sector Y in Table D-1 of Appendix D of the permit.

8.Y.2 Additional Technology-Based Effluent Limits.

8.Y.2.1 Controls for Rubber Manufacturers. (See also Part 2.1.2) Minimize the discharge of zinc in your storm water discharges. Parts 8.Y.2.1.1 to 8.Y.2.1.5 give possible sources of zinc to be reviewed and list control measures to be implemented where determined feasible. Implement additional control measures such as the following, where determined feasible (list not exclusive): using chemicals purchased in pre-weighed, sealed polyethylene bags; storing in-use materials in sealable containers, ensuring an airspace between the container and the cover to minimize “puffing” losses when the container is opened; and using automatic dispensing and weighing equipment.

8.Y.2.1.1 Zinc Bags. Ensure proper handling and storage of zinc bags at your facility through implementation of control measures such as the following, where determined to be feasible (list not exclusive): employee training on the handling and storage of zinc bags; indoor storage of zinc bags; cleanup of zinc spills without washing the zinc into the storm drain; and the use of 2,500-pound sacks of zinc rather than 50- to 100-pound sacks.

8.Y.2.1.2 Dumpsters. Minimize discharges of zinc from dumpsters through implementation of control measures such as the following, where determined to be feasible (list not exclusive): covering the dumpster; moving the dumpster indoors; and providing a lining for the dumpster.

8.Y.2.1.3 Dust Collectors and Baghouses. Minimize contributions of zinc to storm water from dust collectors and baghouses. Replace or repair, as appropriate, improperly operating dust collectors and baghouses.

8.Y.2.1.4 Grinding Operations. Minimize contamination of storm water as a result of dust generation from rubber grinding operations. Where determined to be feasible, install a dust collection system.

8.Y.2.1.5 Zinc Stearate Coating Operations. Minimize the potential for storm water contamination from drips and spills of zinc stearate slurry that may be released to the storm drain. Where determined feasible, use alternative compounds to zinc stearate.

8.Y.2.2 Controls for Plastic Products Manufacturers. Minimize the discharge of plastic resin pellets in your storm water discharges through implementation of control measures such as the following, where determined to be feasible (list not exclusive): minimizing spills; cleaning up of spills promptly and thoroughly; sweeping thoroughly; pellet capturing; employee education; and disposal precautions.

8.Y.3 Additional SWPPP Requirements.

8.Y.3.1 Potential Pollutant Sources for Rubber Manufacturers. (See also Part 5.1.3) Document in your SWPPP the use of zinc at your facility and the possible pathways through which zinc may be discharged in storm water runoff.

8.Y.4 Sector-Specific Benchmarks. (See also Part 6) Table 8.Y-1 identifies benchmarks that apply to Sector Y. These benchmarks apply to both your primary industrial activity and any co-located industrial activities.

Table 8.Y-1		
Subsector (You may be subject to requirements for more than one sector/subsector)	Parameter	Benchmark Monitoring Concentration
Subsector Y1. Rubber Products Manufacturing (SIC 3011, 3021, 3052, 3053, 3061, 3069)	Total Zinc ¹	Hardness Dependent

¹ The benchmark values of some metals are dependent on water hardness. For these parameters, permittees must determine the hardness of the receiving water (see Appendix E, “Calculating Hardness in Receiving Waters for Hardness Dependent Metals,” for methodology), in accordance with Part 6.2.1.1, to identify the applicable ‘hardness range’ for determining their benchmark value applicable to their facility. The ranges occur in 25 mg/L increments. Hardness Dependent Hardness-based benchmarks follow Table 8.2-1 and the requirements in Appendix E.

8.Z Sector Z – Leather Tanning and Finishing

8.Z.1 Covered Storm Water Discharges. The requirements in Subpart Z apply to storm water discharges associated with industrial activity from Leather Tanning and Finishing facilities as identified by the SIC Code specified under Sector Z in Table D-1 of Appendix D of the permit.

8.Z.2 Additional Technology-Based Effluent Limits.

8.Z.2.3 Good Housekeeping Measures. (See also Part 2.1.2.2)

8.Z.2.3.1 Storage Areas for Raw, Semiprocessed, or Finished Tannery By-products. Minimize contamination of storm water runoff from pallets and bales of raw, semi-processed, or finished tannery by-products (e.g., splits, trimmings, shavings). Where practicable, store or protect indoors with polyethylene wrapping, tarpaulins, roofed storage, etc. Place materials on an impermeable surface and enclose or put berms (or equivalent measures) around the area to prevent storm water run-on and runoff where practicable.

8.Z.2.3.2 Material Storage Areas. Label storage containers of all materials (e.g., specific chemicals, hazardous materials, spent solvents, waste materials) minimize contact of such materials with storm water.

8.Z.2.3.3 Buffing and Shaving Areas. Minimize contamination of storm water runoff with leather dust from buffing and shaving areas through implementation of control measures such as the following, where determined to be feasible (list not exclusive): dust collection enclosures; preventive inspection and maintenance programs; or other appropriate preventive measures.

8.Z.2.3.4 Receiving, Unloading, and Storage Areas. Minimize contamination of storm water runoff from receiving, unloading, and storage areas. If these areas are exposed, implement control measures such as the following, where determined to be feasible (list not exclusive): covering all hides and chemical supplies; diverting drainage to the process sewer; or grade berming or curbing the area to prevent storm water runoff.

8.Z.2.3.5 Outdoor Storage of Contaminated Equipment. Minimize contact of storm water with contaminated equipment through implementation of control measures such as the following, where determined to be feasible (list not exclusive): covering equipment; diverting drainage and discharging in a controlled manor to the process sewer; and cleaning thoroughly prior to storage.

8.Z.2.3.6 Waste Management. Minimize contamination of storm water runoff from waste storage areas through implementation of control measures such as the following, where determined to be feasible (list not exclusive): covering dumpsters; moving waste management activities indoors; covering waste piles with temporary covering material such as tarpaulins or polyethylene; and minimizing storm water runoff by enclosing the area or building berms around the area.

8.Z.3 Additional SWPPP Requirements.

8.Z.3.1 Drainage Area Site Map. (See also Part 5.1.2) Identify in your SWPPP where any of the following may be exposed to precipitation or surface runoff: processing and storage areas of the beamhouse; tanyard; and re-tan wet finishing and dry finishing operations.

8.Z.3.2 Potential Pollutant Sources. (See also Part 5.1.3) Document in your SWPPP the following sources and activities that have potential pollutants associated with them (as appropriate): temporary or permanent storage of fresh and brine-cured hides; extraneous hide substances and hair; leather dust, scraps, trimmings, and shavings.

8.AA Sector AA – Fabricated Metal Products

8.AA.1 Covered Storm Water Discharges. The requirements in Subpart AA apply to storm water discharges associated with industrial activity from Fabricated Metal Products facilities as identified by the SIC Codes specified under Sector AA in Table D-1 of Appendix D of the permit.

8.AA.2 Additional Technology-Based Effluent Limits.

8.AA.2.1 Good Housekeeping Measures. (See also Part 2.1.2.2)

8.AA.2.1.1 Raw Steel Handling Storage. Minimize the generation of and/or recover and properly manage scrap metals, fines, and iron dust. Include measures for containing materials within storage handling areas.

8.AA.2.1.2 Paints and Painting Equipment. Minimize exposure of paint and painting equipment to storm water.

8.AA.2.2 Spill Prevention and Response Procedures. (See also Part 2.1.2.4) Ensure that the necessary equipment to implement a cleanup is available to personnel. The following areas should be addressed:

8.AA.2.2.1 Metal Fabricating Areas. Maintain clean, dry, orderly conditions in these areas. Use dry clean-up techniques where practicable.

8.AA.2.2.2 Storage Areas for Raw Metal. Keep these areas free of conditions that could cause, or impede appropriate and timely response to, spills or leakage of materials. Implement control measures such as the following (list not exclusive): maintaining storage areas so that there is easy access in the event of a spill, and labeling stored materials to aid in identifying spill contents.

8.AA.2.2.3 Metal Working Fluid Storage Areas. Minimize the potential for storm water contamination from storage areas for metal working fluids.

8.AA.2.2.4 Cleaners and Rinse Water. Control and clean up spills of solvents and other liquid cleaners, control sand buildup and disbursement from sand-blasting operations, and prevent exposure of recyclable wastes. Substitute environmentally benign cleaners when possible.

8.AA.2.2.5 Lubricating Oil and Hydraulic Fluid Operations. Minimize the potential for storm water contamination from lubricating oil and hydraulic fluid operations. Use monitoring equipment or other devices to detect and control leaks and overflows where feasible. Install perimeter controls such as dikes, curbs, grass filter strips, or equivalent measures where feasible.

8.AA.2.2.6 Chemical Storage Areas. Minimize storm water contamination and accidental spillage in chemical storage areas. Include a program to inspect containers and identify proper disposal methods.

8.AA.2.3 Spills and Leaks. (See also Part 5.1.3.3) In your spill prevention and response procedures, required by Part 2.1.2.4, pay attention to the following materials (at a minimum): chromium, toluene, pickle liquor, sulfuric acid, zinc and other water priority chemicals, and hazardous chemicals and wastes.

8.AA.3 Additional SWPPP Requirements.

8.AA.3.1 Drainage Area Site Map. (See also Part 5.1.2) Document in your SWPPP where any of the following may be exposed to precipitation or surface runoff: raw metal storage areas; finished metal storage areas; scrap disposal collection sites; equipment storage areas; retention and

detention basins; temporary and permanent diversion dikes or berms; right-of-way or perimeter diversion devices; sediment traps and barriers; processing areas, including outside painting areas; wood preparation; recycling; and raw material storage.

8.AA.3.2 Potential Pollutant Sources. (See also Part 5.1.3) Document in your SWPPP the following additional sources and activities that have potential pollutants associated with them: loading and unloading operations for paints, chemicals, and raw materials; outdoor storage activities for raw materials, paints, empty containers, tumbling media, chemicals, and scrap metals; outdoor manufacturing or processing activities such as grinding, cutting, degreasing, buffing, and brazing; onsite waste disposal practices for spent solvents, sludge, pickling baths, shavings, ingot pieces, and refuse and waste piles.

8.AA.4 Additional Inspection Requirements.

8.AA.4.1 Inspections. (See also Part 4) At a minimum, include the following areas in all inspections: raw metal storage areas, finished product storage areas, material and chemical storage areas, recycling areas, loading and unloading areas, equipment storage areas, paint areas, and vehicle fueling and maintenance areas.

8.AA.4.2 Comprehensive Site Inspections. (See also Part 4.3) As part of your inspection, also inspect areas associated with the storage of raw metals, spent solvents and chemicals storage areas, outdoor paint areas, and drainage from roof areas. Potential pollutants include chromium, zinc, lubricating oil, solvents, aluminum, oil and grease, methyl ethyl ketone, steel, and related materials.

8.AA.5 Sector-Specific Benchmarks. (See also Part 6) Table 8.AA-1 identifies benchmarks that apply to the specific subsectors of Sector AA. These benchmarks apply to both your primary industrial activity and any co-located industrial activities.

Subsector (You may be subject to requirements for more than one sector/subsector)	Parameter	Benchmark Monitoring Concentration
Subsector AA1. Fabricated Metal Products, except Coating (SIC 3411-3499; 3911-3915)	Total Aluminum	0.75 mg/L
	Total Zinc ¹	Hardness Dependent
	Nitrate plus Nitrite Nitrogen	0.68 mg/L
Subsector AA2. Fabricated Metal Coating and Engraving (SIC 3479)	Total Zinc ¹	Hardness Dependent
	Nitrate plus Nitrite Nitrogen	0.68 mg/L

¹ The benchmark values of some metals are dependent on water hardness. For these parameters, permittees must determine the hardness of the receiving water (see Appendix E, “Calculating Hardness in Receiving Waters for Hardness Dependent Metals,” for methodology), in accordance with Part 6.2.1.1, to identify the applicable ‘hardness range’ for determining their benchmark value applicable to their facility. The ranges occur in 25 mg/L increments. Hardness Dependent Hardness-based benchmarks follow Table 8.2-1 and the requirements in Appendix E.

8.AB Sector AB – Transportation Equipment, Industrial or Commercial Machinery Facilities

8.AB.1 Covered Storm Water Discharges. The requirements in Subpart AB apply to storm water discharges associated with industrial activity from Transportation Equipment, Industrial or Commercial Machinery facilities as identified by the SIC Codes specified under Sector AB in Table D-1 of Appendix D of the permit.

8.AB.2 Additional SWPPP Requirements.

8.AB.2.1 Drainage Area Site Map. (See also Part 5.1.2) Identify in your SWPPP where any of the following may be exposed to precipitation or surface runoff: vents and stacks from metal processing and similar operations.

8.AC Sector AC – Electronic and Electrical Equipment and Components, Photographic and Optical Goods

8.AC.1 Covered Storm Water Discharges. The requirements in Subpart AC apply to storm water discharges associated with industrial activity from facilities that manufacture Electronic and Electrical Equipment and Components, Photographic and Optical goods as identified by the SIC Codes specified in Table D-1 of Appendix D of the permit.

8.AC.2 Additional Requirements. No additional sector-specific requirements apply.

8.AD Sector AD – Storm Water Discharges Designated by the Director as Requiring Permits

8.AD.1 Covered Storm Water Discharges. Sector AD is used to provide permit coverage for facilities designated by the Director as needing a storm water permit, and any discharges of storm water associated with industrial activity that do not meet the description of an industrial activity covered by Sectors A-AC.

8.AD.1.1 Eligibility for Permit Coverage. Because this sector is primarily intended for use by discharges designated by the Director as needing a storm water permit (which is an atypical circumstance), and your facility may or may not normally be discharging storm water associated with industrial activity, you must obtain the Director’s written permission to use this permit prior to submitting an NOI or have been notified by NDEE that permit authorization is required and that this permit is applicable. If you are authorized to use this permit, you will still be required to ensure that your discharges meet the basic eligibility provisions of this permit at Part 1.1.

8.AD.2 Sector-Specific Benchmarks and Effluent Limits (See also Part 6)

The Director may establish additional monitoring and reporting requirements for your facility prior to authorizing you to be covered by this permit. Additional monitoring requirements would be based on the nature of activities at your facility and your storm water discharges.

9 Permit Conditions Applicable to Specific Indian Country Lands, Service Delivery Areas, or Territories

9.1 State of Nebraska Department of Environment and Energy

Pursuant to the terms and conditions of the Ponca Restoration Act (U.S. Code Title 25, Chapter 14, Subchapter XLVI-A – Ponca Tribe of Nebraska: Restoration of rights and privileges), and subsequent memorandums of agreement, NPDES permitting authority within the Ponca Tribe of Nebraska Service Delivery Areas is the NDEE. This general permit is applicable to these discharges:

- **Ponca Tribe of Nebraska** - Knox, Holt Counties

9.2 EPA Region 7

NPDES permitting authority within the Tribal Reservation Boundary is not delegated to the State of Nebraska. EPA Region 7 is the permitting authority for these lands:

- **Ioway Tribe of Kansas and Nebraska** - Richardson County
- **Omaha Tribe of Nebraska** - Thurston, Cumming, Burt Counties
- **Sac and Fox** - Richardson County
- **Santee Sioux Tribe of Nebraska** - Knox County
- **Winnebago Tribe of Nebraska** - Thurston, Dixon Counties

9.3 EPA Region 8

NPDES permitting authority within the Tribal Reservation Boundary is not delegated to the State of Nebraska. EPA Region 8 is the permitting authority for these lands:

- **Pine Ridge Trust Lands** - Sheridan County